



BEVERAGE-AIR

Carrier

°F  
88.8

Prestige  
Plus

REFRIGERATOR



2006 REFRIGERATED EQUIPMENT CATALOG



BEVERAGE-AIR

Carrier

F

888

Prestige Plus

REFRIGERATOR







OUR VISION IS TO BE THE GLOBAL PREFERRED SUPPLIER OF QUALITY EQUIPMENT TO THE FOODSERVICE, BEVERAGE AND RELATED INDUSTRIES BY BEING PRO-ACTIVE AND INNOVATIVE EMPLOYEES WHO ARE MEASURED BY OUR CUSTOMERS SATISFACTION, OUR COMPANY'S REPUTATION AND PROFITABILITY.





AS PART OF A COMPANY-WIDE COMMITMENT TO INNOVATION, EXCELLENCE AND CUSTOMER SATISFACTION, BEVERAGE-AIR® CONTINUALLY WORKS TO LEVERAGE EFFICIENCIES IN MANUFACTURING AND DISTRIBUTION TO BENEFIT OUR CUSTOMERS.

OUR FOOD SERVICE MANUFACTURING AND DISTRIBUTION BUSINESS HAS BEEN CONSOLIDATED AT A SINGLE FACILITY IN BROOKVILLE, PA TO BETTER SERVE OUR CUSTOMERS. THE BROOKVILLE OPERATION IS A STATE-OF-THE-ART FACILITY, EMPLOYING COMMITTED PEOPLE, MANY OF WHOM HAVE WORKED IN THE INDUSTRY THEIR ENTIRE PROFESSIONAL LIFE. IN FACT, TWO OR THREE GENERATIONS WORK SIDE BY SIDE. INNOVATIVE THINKING AND QUALITY MANUFACTURING ARE AT THEIR CORE.

WITH OUR FOOD SERVICE PRODUCTS MANUFACTURED AND DISTRIBUTED FROM ONE FACILITY, WE WILL BE ABLE TO EXCEED EXPECTATIONS IN AREAS LIKE...

IMPROVED LEAD TIMES  
FREIGHT DAMAGE  
REDUCED BACK-ORDERS  
LOGISTIC COST

AS A RESULT, OUR CUSTOMERS BENEFIT BECAUSE EACH MEMBER OF THE BEVERAGE-AIR® TEAM IS COMMITTED TO QUALITY PRODUCTS AND LOGISTICS EXCELLENCE.



**BEVERAGE-AIR**



**BB** - Back Bar  
**BBG** - Back Bar, Glass Door  
**BM** - Barmobile  
**BMC** - Barmobile Club Top  
**BZ** - Breeze - Air Curtain Merchandiser  
**BAC** - Blast Chiller  
**BACF** - Blast Chiller Freezer  
  
**CAV** - Wine Cave, Glass Door  
**CDR** - Curved Glass Deli Refrigerator  
**CDD** - Curved Glass Deli Dry  
**CF** - Countertop Freezer  
**CR** - Countertop Refrigerator  
**CT** - Countertop Refrigerator  
**CFG** - Convenience Freezer - Glass Door  
**CRG** - Convenience Refrigerator - Glass Door  
  
**DD** - Direct Draw  
**DDC** - Direct Draw, Club Top  
**DP** - Deli/Pizza Preparation Table  
**DW** - Deepwell Bottle Cooler  
**DMC** - Deli Meat Case  
**DMCS** - Deli Meat Case, Self Service  
  
**EF** - Efficiency Freezer - Top Mount  
**ER** - Efficiency Refrigerator - Top Mount  
  
**GF** - Glass Froster  
  
**KF** - Koolateer Freezer, Bottom Mount  
**KR** - Koolateer Refrigerator, Bottom Mount  
  
**MB** - Maxima  
**MM** - Maxi Marketeer®  
**MS** - Mix and Bulk Milk Storage  
**MT** - Marketeer®

**PC** - Pie Case  
**PF** - Prestige Freezer, Top Mount  
**PR** - Prestige Refrigerator, Top Mount  
**PRD** - Prestige Refrigerator, Pass-Thru  
**PRF** - Refrigerator/Freezer, Dual Temp  
**PRI** - Prestige Roll-In Refrigerator  
**PFI** - Prestige Roll-In Freezer  
**PRT** - Prestige Roll-Thru Refrigerator  
  
**SDC** - Sandwich Display Case  
**SDCS** - Sandwich Display Case Self - Service  
**SF** - Shallow Well Bottle Cooler  
**SM** - School Milk Cooler  
**SMF** - School Milk, Forced Air  
**ST** - School Milk Dual Access  
**STF** - School Milk Dual Access Forced Air  
**SP** - Sandwich Preparation, Standard Top  
**SPM** - Sandwich Preparation, Mega Top  
**SPC** - Sandwich Preparation, Cutting Top  
  
**B/BCS** - Bunkers  
  
**UCF** - Undercounter Freezer  
**UCR** - Undercounter Refrigerator  
**UCRD** - Undercounter Refrigerator w/Drawers  
**UR** - Countertop Refrigerator  
  
**WTRCS** - Work Top Cook Stand Refrigerator  
**WTR** - Work Top Refrigerator  
**WTF** - Work Top Freezer  
**WTRD** - Work Top Refrigerator w/Drawers



visit us online at  
[www.beverage-air.com](http://www.beverage-air.com)

for more product information



additional product reference



|   |            |
|---|------------|
| ■ PLUS SERIES   | PAGE II-22 |
| Reach-In, Top Mount Prestige Plus Series Refrigerators & Freezers         |            |
| Roll-In, Roll-Thru Refrigerators & Freezers                               |            |
| Reach-In, Top Mount E Plus-Series Refrigerators & Freezers                |            |
| ■ REACH-IN, ROLL-INS, ROLL-THRUS, BLAST CHILLERS & BLAST CHILLER FREEZERS | PAGE 23-32 |
| Reach-In, Top Mount E-Series Refrigerators & Freezers                     |            |
| Reach-In, Bottom Mount K-Series Refrigerators & Freezers                  |            |
| Reach-In, Top Mount, Dual Temp Cabinets                                   |            |
| Blast Chillers, Blast Chiller Freezers                                    |            |
| ■ FOOD PREPARATION TABLES   | PAGE 33-42 |
| Sandwich Preparation, Standard Models & Salad Tables                      |            |
| Sandwich Preparation, Mega Top Models & Salad Tables                      |            |
| Sandwich Preparation, Cutting Top Models & Salad Tables                   |            |
| Deli/Pizza Preparation Tables   |            |
| Work Top Cook Stand Refrigerators   |            |
| ■ UNDERCOUNTER, WORKTOP REFRIGERATORS AND FREEZERS                        | PAGE 43-46 |
| Work Top Refrigerators & Freezers (29" & 32" Base)                        |            |
| Undercounter Refrigerators & Freezers (29" & 32" Base)                    |            |
| Undercounter Refrigerators & Freezers (23" & 27" Base)                    |            |
| ■ BAR EQUIPMENT   | PAGE 47-54 |
| Deep Well Bottle Coolers & Glass Frosters                                 |            |
| Back Bar Refrigerators  |            |
| Direct Draw Beer Refrigerators & Barmobiles                               |            |
| Wine Caves  |            |
| ■ MILK COOLERS  | PAGE 55-62 |
| Milk Coolers, Forced Air  |            |
| Milk Coolers, Cold Wall   |            |
| Mix & Bulk Milk Storage Cabinets  |            |
| Bunker Impulse Merchandisers  |            |
| ■ GLASS DOOR MERCHANDISERS  | PAGE 63-68 |
| Glass Door Marketeers   |            |
| Glass Door Refrigerators & Freezers                                       |            |
| Special Application Merchandisers   |            |
| Countertop Merchandisers  |            |
| ■ OPEN-AIR MERCHANDISERS  | PAGE 69-72 |
| Special Application Merchandisers   |            |
| Island and Spot Merchandisers   |            |
| Multi-Deck Merchandisers  |            |
| ■ DELI CASES, STEP-INS, AND CONDENSING SYSTEMS                            | PAGE 73-80 |
| Horizontal Display Cases  |            |
| Curved Glass Marketers®   |            |
| Product Display Cases   |            |
| Step-In Coolers   |            |
| Condensing Systems  |            |
| ■ ACCESSORIES   | PAGE 81-88 |
| Accessories/Parts   |            |
| Factory Custom Signs  |            |
| ■ LINE DRAWINGS, WARRANTY   | PAGE 89-92 |
| Product Line Drawings   |            |
| Warranty Information  |            |





#### STF Twin Top Dual Access

Forced Air Milk Coolers  
Removable Field Accessible Evaporator Housing allows for easy serviceability.

#### Beverage-Air Blast Chillers/Freezers

Optimize your food quality and production with this vital weapon in the food safety war. Beverage-Air Blast Chillers and Blast Chiller Freezers merge the concept of food, safety and work efficiency.

#### Air Flow Management

Advanced air flow management is designed to maintain equal air distribution throughout Beverage-Air units.

#### Merchandising

Excellence Unsurpassed!  
Beverage-Air: Your one-stop-shop for merchandising solutions.

#### T-8 Electronic Ballast

T-8 fluorescent interior lights provide 300% more illumination and may last 24,000 hours.

#### Field Reversible Doors

Field reversible doors provide greater flexibility.

### INTRODUCING PRESTIGE PLUS SERIES





MORE THAN A NEW LINE OF COMMERCIAL REFRIGERATION SOLUTIONS.

- roll-ins
- roll-thru
- self-contained
- pass-thru
- reach-in refrigerators and freezers



## REFRIGERATED EQUIPMENT CATALOG



- **Balanced Refrigeration System:**  
Designed for optional energy efficiency versus one-size-fits-all approach of competition.
- **Reach-in's have Full 2" thick foamed-in-place insulation:**  
Meets and exceeds industry standard.
- **60 years of Engineering Excellence:**  
Factory Laboratories approved for on-site agency testing.
- **State-of-the-art Fan Motor:**  
Moves more air with twice the RPM of competition.
- **# 1 design in the industry:**  
With Top Hung Slide Door Roller Track Assembly versus bottom track design which is prone to dirt build up.
- **Sanitary:**  
Health Department friendly workflow handle.
- **Industry leading:**  
24,000 Hour T-8 light for maximum life and merchandising capabilities.
- **Actual Front Breathing Units:**  
can be flush mounted without the use of rubber spacers in rear.
- **Powder coated epoxy shelves:**  
With 1/2" spacing for added strength and durability exceeding 1" industry standard spacing. Also reduces cutting and rusting found with vinyl coated shelves.
- **Automated order acknowledgement:**  
and shipping reports emailed to you daily.




## 24/7 WARRANTY SERVICE DISPATCH





- |    |                               |              |    |                               |              |
|----|-------------------------------|--------------|----|-------------------------------|--------------|
| 1  | STANLEY-BONNANNO              | 814-474-3239 | 12 | KELLY MINCKS NORTHWEST AGENTS |              |
|    | FAX                           | 814-474-2530 |    | PHONE                         | 425-402-0188 |
|    | BONANNO@VELOCITY.NET          |              |    | FAX                           | 425-402-0740 |
| 2  | BUTKEVICH ASSOCIATES          | 508-584-1818 |    | BILL@KELLY-MINCKS.COM         |              |
|    | FAX                           | 508-583-8401 | 13 | MELVILLE MARKETING GROUP, INC |              |
|    | BUCKY@BUTKEVICH.COM           |              |    | PHONE                         | 612-338-5078 |
| 3  | IRVIN INTERNATIONAL INC       | 800-783-0929 |    | FAX                           | 612-338-5505 |
|    | FAX                           | 770-442-1108 |    | WKRAM@MELVILLEMKT.COM         |              |
|    | OFFICE@IRVININTERNATIONAL.COM |              | 14 | MARKETSMART INC.              | 925-846-6237 |
| 4  | SPURRY & ASSOCIATES, INC      | 410-820-7100 |    | FAX                           | 925-846-2602 |
|    | FAX                           | 410-820-7123 |    | CRUSSELL@MARKETSMARTINC.COM   |              |
|    | CSPURRY@GOEASTON.NET          |              | 15 | SWAN MARKETING                | 303-290-9452 |
| 5  | TD MARKETING CO. INC.         | 201-935-1600 |    | FAX                           | 303-290-9526 |
|    | FAX                           | 201-935-1260 |    | SWAN@ECENTRAL.COM             |              |
|    | FDOYLE@TDMARKETINGCO.COM      |              | 16 | TEPPER & ASSOCIATES, INC.     | 727-322-1212 |
| 6  | THE DUNNE GROUP               | 214-443-4450 |    | FAX                           | 727-322-1313 |
|    | FAX                           | 214-443-4451 |    | INFO@TEPPERWHITMILL.COM       |              |
|    | JKD@DUNNEGROUP.COM            |              | 17 | J.A. TRAVERS ASSOCIATES       | 315-469-7100 |
| 7  | MCCALL GROUP                  | 602-795-7304 |    | FAX                           | 315-469-7104 |
|    | FAX                           | 602-795-7338 |    | JATRAVERSI@AOL.COM            |              |
|    | AZMCCALLGROUP@ATT.NET         |              | 18 | TOM BUCKLES ASSOCIATES        | 517-887-0725 |
| 8  | CONTACT FACTORY               | 888-845-9800 |    | FAX                           | 517-887-0111 |
|    | FAX                           | 864-582-5083 |    | BUCKLES.CAPITOL@ACD.NET       |              |
|    | SALES@BEVAIR.COM              |              | 19 | VQ & T, INC.                  | 314-961-1011 |
| 9  | COOLER SOLUTIONS, INC.        | 800-211-7745 |    | FAX                           | 314-961-0213 |
|    | FAX                           | 215-672-7717 |    | DEBBIE@VQANDT.COM             |              |
|    | NIKI@COOLERSOLUTIONS.COM      |              | 20 | RABCO FOODSERVICE LIMITED     | 416-321-5823 |
| 10 | COLLINS ASSOCIATES INC.       | 704-588-8200 |    | FAX                           | 416-321-5826 |
|    | FAX                           | 704-588-8338 |    | SALES@RABCOFOODSERVICE.COM    |              |
|    | DB_COLLINS@MSN.COM            |              | 21 | PRF MARKETING                 | 630-990-0600 |
| 11 | LUND-LORIO, INC.              | 949-443-4855 |    | FAX                           | 630-990-0602 |
|    | FAX                           | 949-443-4856 |    | SALES@PRFMARKETING.COM        |              |
|    | GREG@LUND-LORIO.COM           |              |    |                               |              |

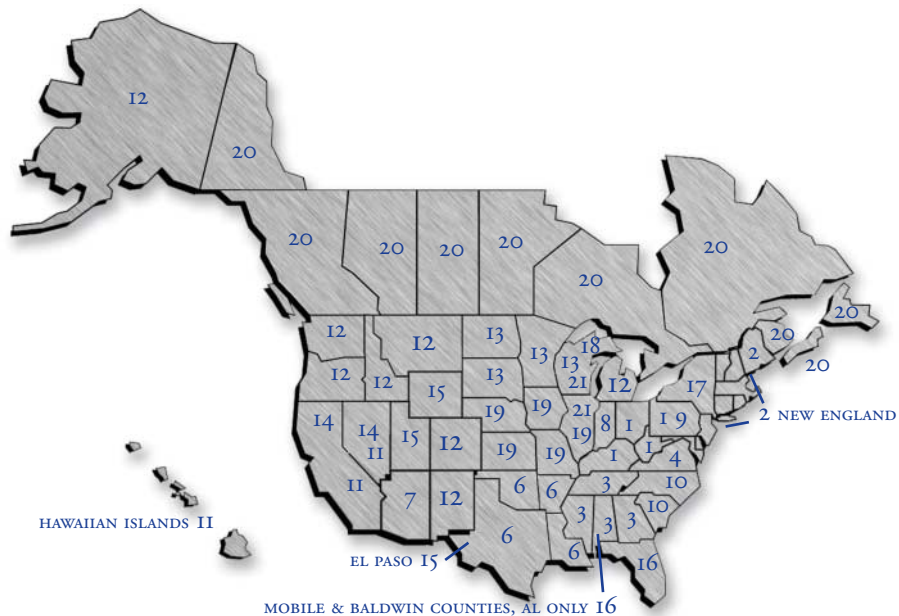

### DIRECTORY OF FACTORY HEADQUARTERS

Sales Office - P.O. Box 5932, Spartanburg, SC 29304  
 700 Buffington Road, Spartanburg, SC 29303  
 Phone - 864-582-8111  
 Fax - 864-582-5083  
 Email - sales@bevair.com  
 Web - www.beverage-air.com

### DIRECTORY OF FACTORY CUSTOMER SERVICE REPRESENTATIVES

Phone - 888-845-9800  
 Fax - 800-253-5168

### DIRECTORY OF FACTORY TECHNICAL SERVICE REPRESENTATIVES

Technical Services 800-684-1199  
 Technical Services Fax 800-262-9381  
 Warranty & parts orders only

For warranty service you may call your dealer, local service company or call 24 Hour Warranty Service Center 1-877-866-1223

### CONVERSION FROM U.S. MEASUREMENTS TO METRIC

28.32 Liters = 1 Cubic Ft.  
 25.4 mm = 1 Inch  
 .454 Kg = 1 lb.

Fahrenheit to Centigrade  
 $T_c = (5/9) \times (T_f - 32)$

#### SPARTANBURG, SC



#### HEADQUARTERS

#### BROOKVILLE, PA



#### FOOD SERVICE MANUFACTURING

#### HAWTHORN, PA



#### FOOD SERVICE DISTRIBUTION CENTER

#### CHARLOTTE, NC



#### CCR HEADQUARTERS SERVICE CALL CENTER







Turn to the Experts.™



PLUS SERIES

**E** *Plus* + *Prestige Plus*



MORE THAN A NEW LINE OF COMMERCIAL REFRIGERATION SOLUTIONS.....  
BEVERAGE-AIR'S new PLUS SERIES line of reach-ins represents a whole new line of thinking. DESIGNED WITH PATENTED XSTREAM® VALVE TECHNOLOGY FROM XDX® AND A HOST OF OTHER INNOVATIONS, OUR PLUS SERIES MODELS GIVE YOU UNPRECEDENTED FLEXIBILITY, COST-SAVINGS, AND PERFORMANCE. AND A WHOLE NEW WORLD OF POSSIBILITIES. AVAILABLE IN A WIDE VARIETY OF MODELS AND OPTIONS, THIS NEW LINE OF COMMERCIAL REFRIGERATION WILL ENSURE EFFICIENCY AND PROFITABILITY FOR YOUR OPERATION.

## INTRODUCING

### A NEW LINE OF COMMERCIAL REFRIGERATION

#### GET BETTER PERFORMANCE

Increase product shelf life  
Better temperature and humidity control  
Decrease defrost cycles  
Increased product capacity

We built more performance into every Prestige Plus unit so you get more freshness out. We began by incorporating \*XSTREAM® valve technology. This break-through technology uses a specially designed valve to spray a thin but uniform coating of refrigerant on all interior surfaces of the evaporator tubing. The result is significantly increased cooling capacity, better temperature and humidity control, and faster pull-down.

We didn't stop there. We added stainless steel panel construction inside and out to increase temperature stability. We reinforced the doors with a minimum of two inches of CFC-free foamed-in-place polyurethane and a cam-lift hinge to make them self-closing. You'll also notice magnetic plug-in door and wiper gaskets for airtight seals and our proprietary air distribution system that provides the industry's most efficient circulation.

#### REDUCE YOUR OPERATING COSTS

Greatly reduce energy consumption  
Significantly decrease product spoilage  
Reduce maintenance costs

At the same time, Prestige Plus takes better care of your green (and we're not just talking salad). In addition to being a smarter method of cooling, the Xstream® valve makes Prestige Plus one of the most energy efficient lines on the market. Working smarter instead of harder, it can save energy cost and reduce your maintenance cost. All while increasing the shelf life of your inventory. The bottom line? With Prestige Plus, you put more money into building your business, not just preserving it.

#### A MORE THOUGHTFUL DESIGN

6" legs for better ergonomics  
Reversible Doors  
Anti-Microbial Door Handles  
Exterior LCD thermometer  
Options for customizing



More than a new line of commercial refrigeration solutions . . .

Prestige Plus represents a whole new line of thinking.

DESIGNED WITH PATENTED XSTREAM® VALVE TECHNOLOGY FROM XDX® AND A HOST OF OTHER INNOVATIONS, PRESTIGE PLUS GIVES YOU UNPRECEDENTED FLEXIBILITY, COST-SAVINGS, AND PERFORMANCE. AND A WHOLE NEW WORLD OF POSSIBILITIES.

Roll-ins  
Roll-thrus  
Self-contained  
Pass-thrus  
Reach-in refrigerators and freezers

OPTIONAL ACCESSORIES ON PAGE 81



## INTRODUCING

### A NEW LINE OF COMMERCIAL REFRIGERATION

Carrier


FINALLY, WE FOCUSED ON THE LITTLE THINGS THAT COMBINE TO MAKE A BIG DIFFERENCE IN YOUR BUSINESS. FOR EXAMPLE, WE DESIGNED EVERY PRESTIGE PLUS UNIT WITH SIX INCH LEGS, MAKING THE BOTTOM SHELVES EASIER TO ACCESS. WE MADE SURE THE DOORS WERE REVERSIBLE BECAUSE YOU NEVER KNOW HOW YOUR KITCHEN CONFIGURATION WILL CHANGE.

WE INCLUDED AN EASIER TO READ EXTERNAL LCD THERMOMETER BECAUSE YOUR PEOPLE DON'T HAVE TIME TO DECIPHER AN LED SCREEN. THE ANTI-MICROBIAL DOOR HANDLES ARE ALSO A NICE TOUCH, SAFER TOO. AND WITH A HOST OF OPTIONS AND ACCESSORIES, BEVERAGE-AIR® CAN TAILOR THE UNIQUE CAPABILITIES OF YOUR NEW PRESTIGE PLUS REFRIGERATOR OR FREEZER TO YOUR INDIVIDUAL NEEDS.

Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.



XSTREAM® VALVE TECHNOLOGY WAS DEVELOPED BY XDX® INNOVATIVE REFRIGERATION AND IS MADE AVAILABLE EXCLUSIVELY THROUGH BEVERAGE-AIR'S PARENT COMPANY, CARRIER CORPORATION. THIS PROPRIETARY TECHNOLOGY CHANGES THE CHARACTERISTICS OF THE REFRIGERANT FLOW PATTERN THROUGH THE EVAPORATOR TO CREATE AN ENVIRONMENT THAT IS MORE ENERGY-EFFICIENT, WITH FASTER PULL-DOWN, AND BETTER TEMPERATURE AND HUMIDITY CONTROL.

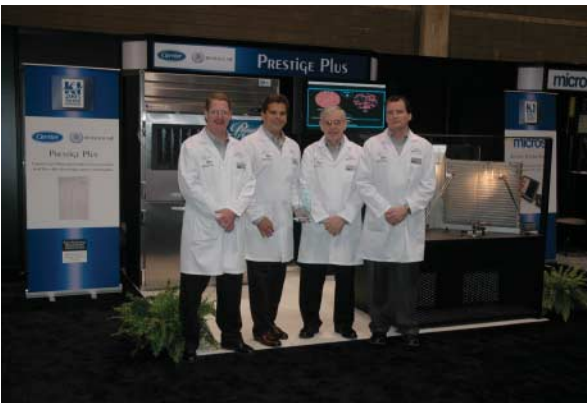

PRESTIGE PLUS

FOR MORE THAN 60 YEARS BEVERAGE-AIR® HAS BEEN CREATING OPPORTUNITIES THROUGH BETTER THINKING. WITH PRESTIGE PLUS, THE LEGACY OF INNOVATION CONTINUES.



BEVERAGE-AIR

## REACH-IN REFRIGERATORS AND FREEZERS

SOLID AND HALF SOLID DOORS

DURABLE STAINLESS STEEL

EXTERIORS ON ALL PRESTIGE PLUS MODELS

6" LEGS FOR BETTER ERGONOMICS

HOST OF OPTIONS AND ACCESSORIES

DESIGNED WITH PATENTED XSTREAM® VALVE  
TECHNOLOGY FROM XDX®

XSTREAM® valve technology was developed by XDX Innovative Refrigeration® and is made available through Beverage-Air's parent company, Carrier Corporation. This proprietary technology changes the characteristics of the refrigerant flow pattern through the evaporator to create an environment that is more energy-efficient, with faster pull-down, and better temperature and humidity control.

- Stainless steel Interior and Exterior.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Anti-Microbial door handles can help combat bacteria and other microorganisms.
- Field-reversible, self-closing doors on cam lift hinges provide 120° stay open feature for easy product loading.
- Locks are standard on solid doors only.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Adjustable epoxy coated steel wire shelves, standard (three per section).
- Specially designed airflow system for effective temperature recovery and product preservation.
- Evaporator fans disengage when door is opened to maximize efficiency (excludes bottom doors on half door units).
- External digital thermometer displays interior temperature.
- Refrigerators maintain product temperature of 36-38°F with high humidity coil for optimum product preservation.
- Freezers maintain product temperature of 0°F. Includes automatic defrost.
- Six inch adjustable legs.
- Refrigerators utilize ozone friendly R134a refrigerant. 3/4 HP refrigerators utilize R404A refrigerant.
- Freezers utilize ozone friendly R404A refrigerant.
- Hot gas condensate evaporator.
- Cord and plug furnished on 115-volt models. Dual voltage (115/208-230) models require field wiring.



Contact factory for a list of  
ENERGY STAR® certified models.



## TOP MOUNT PRESTIGE PLUS SERIES

PRESTIGE PLUS



# REACH-IN REFRIGERATORS AND FREEZERS

SOLID AND HALF SOLID DOORS



CONTACT FACTORY FOR MODEL AVAILABILITY AND LEAD TIMES.

Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.



| MODEL         | LIST PRICE | TYPE UNIT    | CRATED WEIGHT | F.O.B. | CU.FT. | CABINET BODY INCHES W x D x H | CABINET BODY METRIC (MM) W x D x H | VOLTS          | AMPS | HP  | SHELVES |
|---------------|------------|--------------|---------------|--------|--------|-------------------------------|------------------------------------|----------------|------|-----|---------|
| PR1-1AS-XDX   | \$6709     | Refrigerator | 351           | BR     | 23.1   | 26"x 30"x 84 1/2"             | 660 x 762 x 2146                   | 115            | 5.7  | 1/4 | 3       |
| PR1-1AHS-XDX  | \$7247     | Refrigerator | 351           | BR     | 23.1   | 26"x 30"x 84 1/2"             | 660 x 762 x 2146                   | 115            | 5.7  | 1/4 | 3       |
| PR2-1AS-XDX   | \$9738     | Refrigerator | 562           | BR     | 46.6   | 52"x 30"x 84 1/2"             | 1321 x 762 x 2146                  | 115            | 9.4  | 1/3 | 6       |
| PR2-1AHS-XDX  | \$10743    | Refrigerator | 562           | BR     | 46.6   | 52"x 30"x 84 1/2"             | 1321 x 762 x 2146                  | 115            | 9.4  | 1/3 | 6       |
| PR3-1AS-XDX   | \$13884    | Refrigerator | 791           | BR     | 74     | 78"x 30"x 84 1/2"             | 1981 x 762 x 2146                  | 115            | 10.6 | 1/2 | 9       |
| PR3-1AHS-XDX  | \$15357    | Refrigerator | 791           | BR     | 74     | 78"x 30"x 84 1/2"             | 1981 x 762 x 2146                  | 115            | 10.6 | 1/2 | 9       |
| PF1-1AS-XDX   | \$8164     | Freezer      | 377           | BR     | 23.1   | 26"x 30"x 84 1/2"             | 660 x 762 x 2146                   | 115            | 10.6 | 1/2 | 3       |
| PF1-1AHS-XDX  | \$8690     | Freezer      | 377           | BR     | 23.1   | 26"x 30"x 84 1/2"             | 660 x 762 x 2146                   | 115            | 10.6 | 1/2 | 3       |
| PF2-1AS-XDX   | \$12432    | Freezer      | 649           | BR     | 46.6   | 52"x 30"x 84 1/2"             | 1321 x 762 x 2146                  | 115            | 14.5 | 3/4 | 6       |
| PF2-1AHS-XDX  | \$13273    | Freezer      | 649           | BR     | 46.6   | 52"x 30"x 84 1/2"             | 1321 x 762 x 2146                  | 115            | 14.5 | 3/4 | 6       |
| PF3-5AS-XDX   | \$16631    | Freezer      | 873           | BR     | 74     | 78"x 30"x 84 1/2"             | 1981 x 762 x 2146                  | 208-230<br>115 | 10.5 | 1   | 9       |
| PF3-5AHS-XDX  | \$18102    | Freezer      | 873           | BR     | 74     | 78"x 30"x 84 1/2"             | 1981 x 762 x 2146                  | 208-230<br>115 | 10.5 | 1   | 9       |
| PRD1-1AS-XDX  | \$7567     | Pass Thru    | 346           | BR     | 24.6   | 26"x 30"x 84 1/2"             | 660 x 762 x 2146                   | 115            | 5.7  | 1/4 | 3       |
| PRD1-1AHS-XDX | \$8408     | Pass Thru    | 346           | BR     | 24.6   | 26"x 30"x 84 1/2"             | 660 x 762 x 2146                   | 115            | 5.7  | 1/4 | 3       |
| PRD2-1AS-XDX  | \$10846    | Pass Thru    | 669           | BR     | 49.7   | 52"x 30"x 84 1/2"             | 1321 x 762 x 2146                  | 115            | 9.4  | 1/3 | 6       |
| PRD2-5AHS-XDX | \$13378    | Pass Thru    | 669           | BR     | 49.7   | 52"x 30"x 84 1/2"             | 1321 x 762 x 2146                  | 115            | 9.4  | 1/3 | 6       |
| PRD3-1AS-XDX  | \$15836    | Pass Thru    | 912           | BR     | 78.7   | 78"x 30"x 84 1/2"             | 1981 x 762 x 2146                  | 115            | 10.6 | 1/2 | 9       |
| PRD3-1AHS-XDX | \$18248    | Pass Thru    | 912           | BR     | 78.7   | 78"x 30"x 84 1/2"             | 1981 x 762 x 2146                  | 115            | 10.6 | 1/2 | 9       |

Door Configurations: AS- Solid Doors

AHS- Half Solid Doors

For total height add 6" for legs or casters

BR= Brookville, PA

## STAINLESS STEEL INTERIOR AND EXTERIOR

OPTIONAL ACCESSORIES ON PAGE 81



PRESTIGE PLUS





## REACH-IN REFRIGERATORS AND FREEZERS

GLASS AND HALF GLASS DOORS

FIELD-REVERSIBLE DOORS WITH 120°  
STAY-OPEN FEATURE FOR  
EASY LOADING

ANTI-MICROBIAL DOOR HANDLES

DESIGNED WITH PATENTED XSTREAM® VALVE  
TECHNOLOGY FROM XDX®

XSTREAM® valve technology was developed by XDX® Innovative Refrigeration and is made available through Beverage-Air's parent company, Carrier Corporation. This proprietary technology changes the characteristics of the refrigerant flow pattern through the evaporator to create an environment that is more energy-efficient, with faster pull-down, and better temperature and humidity control.

## OPTIONAL ACCESSORIES ON PAGE 81

- Stainless steel Interior and Exterior.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Anti-Microbial door handles can help combat bacteria and other microorganisms.
- Glass and Half-Glass door models offer maximum product visibility.
- Locks are standard on solid doors only.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Adjustable epoxy coated steel wire shelves, standard (three per section).
- Specially designed airflow system for effective temperature recovery and product preservation.
- Evaporator fans disengage when door is opened to maximize efficiency.
- External digital thermometer displays interior temperature.
- Refrigerators maintain product temperature of 36-38°F with high humidity coil for optimum product preservation.
- Freezers maintain product temperature of 0°F. Includes automatic defrost.
- Six inch adjustable legs.
- Refrigerators utilize ozone friendly R134a refrigerant. 3/4 HP refrigerators utilize R404A refrigerant.
- Freezers utilize ozone friendly R404A refrigerant.
- Hot gas condensate evaporator.
- Cord and plug furnished on 115-volt models. Dual voltage (115/208-230) models require field wiring.
- Optional tray slides and accessories available.



TOP MOUNT PRESTIGE PLUS SERIES

# REACH-IN REFRIGERATORS AND FREEZERS

## GLASS AND HALF GLASS DOORS



| MODEL         | LIST PRICE | TYPE UNIT    | CRATED WEIGHT | F.O.B. | CU.FT. | CABINET BODY INCHES W x D x H | CABINET BODY METRIC (MM) W x D x H | VOLTS          | AMPS | HP    | SHELVES |
|---------------|------------|--------------|---------------|--------|--------|-------------------------------|------------------------------------|----------------|------|-------|---------|
| PR1-1AG-XDX   | \$7071     | Refrigerator | 351           | BR     | 23.1   | 26"x 30"x 84 1/2"             | 660 x 762 x 2146                   | 115            | 5.7  | 1/4   | 3       |
| PR1-1AHG-XDX  | \$7191     | Refrigerator | 351           | BR     | 23.1   | 26"x 30"x 84 1/2"             | 660 x 762 x 2146                   | 115            | 5.7  | 1/4   | 3       |
| PR2-1AG-XDX   | \$10247    | Refrigerator | 562           | BR     | 46.6   | 52"x 30"x 84 1/2"             | 1321 x 762 x 2146                  | 115            | 9.4  | 1/3   | 6       |
| PR2-1AHG-XDX  | \$10658    | Refrigerator | 562           | BR     | 46.6   | 52"x 30"x 84 1/2"             | 1321 x 762 x 2146                  | 115            | 9.4  | 1/3   | 6       |
| PR3-1BG-XDX   | \$15046    | Refrigerator | 841           | BR     | 74     | 78"x 30"x 84 1/2"             | 1981 x 762 x 2146                  | 115            | 12.0 | 3/4   | 9       |
| PR3-1BHG-XDX  | \$15587    | Refrigerator | 841           | BR     | 74     | 78"x 30"x 84 1/2"             | 1981 x 762 x 2146                  | 115            | 12.0 | 3/4   | 9       |
| PF1-1BG-XDX   | \$10530    | Freezer      | 398           | BR     | 23.1   | 26"x 30"x 84 1/2"             | 660 x 762 x 2146                   | 115            | 10.6 | 3/4   | 3       |
| PF1-1BHG-XDX  | \$10612    | Freezer      | 398           | BR     | 23.1   | 26"x 30"x 84 1/2"             | 660 x 762 x 2146                   | 115            | 10.0 | 3/4   | 3       |
| PF2-5BG-XDX   | \$13808    | Freezer      | 727           | BR     | 46.6   | 52"x 30"x 84 1/2"             | 1321 x 762 x 2146                  | 208-230<br>115 | 10.5 | 1     | 6       |
| PF2-5BHG-XDX  | \$14637    | Freezer      | 727           | BR     | 46.6   | 52"x 30"x 84 1/2"             | 1321 x 762 x 2146                  | 208-230<br>115 | 10.5 | 1     | 6       |
| PF3-5BG-XDX   | \$19241    | Freezer      | 924           | BR     | 74     | 78"x 30"x 84 1/2"             | 1981 x 762 x 2146                  | 208-230<br>115 | 16.0 | 1 1/2 | 9       |
| PF3-5BHG-XDX  | \$20168    | Freezer      | 924           | BR     | 74     | 78"x 30"x 84 1/2"             | 1981 x 762 x 2146                  | 208-230<br>115 | 16.0 | 1 1/2 | 9       |
| PRD1-1BG-XDX  | \$8634     | Pass Thru    | 346           | BR     | 24.6   | 26"x 30"x 84 1/2"             | 660 x 762 x 2146                   | 115            | 6.0  | 1/3   | 3       |
| PRD1-1BHG-XDX | \$8765     | Pass Thru    | 346           | BR     | 24.6   | 26"x 30"x 84 1/2"             | 660 x 762 x 2146                   | 115            | 6.0  | 1/3   | 3       |
| PRD2-1BG-XDX  | \$12744    | Pass Thru    | 669           | BR     | 49.7   | 52"x 30"x 84 1/2"             | 1321 x 762 x 2146                  | 115            | 12.0 | 3/4   | 6       |
| PRD2-1BHG-XDX | \$13138    | Pass Thru    | 669           | BR     | 49.7   | 52"x 30"x 84 1/2"             | 1321 x 762 x 2146                  | 115            | 12.0 | 3/4   | 6       |
| PRD3-1BG-XDX  | \$18271    | Pass Thru    | 912           | BR     | 78.7   | 78"x 30"x 84 1/2"             | 1981 x 762 x 2146                  | 115            | 14.0 | 1     | 9       |
| PRD3-1BHG-XDX | \$18862    | Pass Thru    | 912           | BR     | 78.7   | 78"x 30"x 84 1/2"             | 1981 x 762 x 2146                  | 115            | 14.0 | 1     | 9       |

Door Configurations: AG- Solid Glass Doors AHG- Half Solid Glass Doors For total height add 6" for legs or casters BG- Solid Glass Doors  
 BHG- Half Solid Glass Doors BR= Brookville, PA

CONTACT FACTORY FOR MODEL AVAILABILITY AND LEAD TIMES.



PRESTIGE PLUS



## ROLL-IN AND ROLL THRU

## REFRIGERATORS AND FREEZERS

| MODEL        | LIST PRICE | TYPE UNIT      | CRATED WEIGHT | F.O.B. | DOORS | FINISH | CU. FT. | CABINET BODY INCHES W x D x H | CABINET BODY METRIC (MM) W x D x H | VOLTS          | AMPS | HP  | CART CAPACITY | SHELVES |
|--------------|------------|----------------|---------------|--------|-------|--------|---------|-------------------------------|------------------------------------|----------------|------|-----|---------------|---------|
| PRI1-1AS-XDX | \$7979     | Roll-In Ref.   | 471           | BR     | 1     | S/S    | 34.3    | 33"x 33"x 84 1/2"             | 838 x 838 x 2146                   | 115            | 5.7  | 1/4 | 1             | -       |
| PRI2-1AS-XDX | \$12201    | Roll-In Ref.   | 777           | BR     | 2     | S/S    | 73.4    | 66"x 33"x 84 1/2"             | 1676 x 838 x 2146                  | 115            | 8.0  | 1/2 | 2             | -       |
| PRT1-1AS-XDX | \$7979     | Roll-Thru Ref. | 471           | BR     | 2     | S/S    | 36.5    | 33"x 33"x 84 1/2"             | 838 x 838 x 2146                   | 115            | 5.7  | 1/4 | 1             | -       |
| PRT2-1AS-XDX | \$13596    | Roll-Thru Ref. | 740           | BR     | 4     | S/S    | 78.2    | 66"x 33"x 84 1/2"             | 1676 x 838 x 2146                  | 115            | 12.0 | 1/2 | 2             | -       |
| PFI1-1AS-XDX | \$8885     | Roll-In Fzr.   | 498           | BR     | 1     | S/S    | 34.3    | 33"x 33"x 84 1/2"             | 838 x 838 x 2146                   | 115            | 10.6 | 1/2 | 1             | -       |
| PFI2-5AS-XDX | \$14292    | Roll-In Fzr.   | 850           | BR     | 2     | S/S    | 73.4    | 66"x 33"x 84 1/2"             | 1676 x 838 x 2146                  | 208-230<br>115 | 10.5 | 1   | 2             | -       |

Door Configurations: AS- Solid Doors

BR= Brookville, PA

- Stainless steel exterior and interior.
- To accommodate roll-in foodservice racks, 27" x 29" x 64".
- Stainless steel heavy-duty ramp and interior rack guides.
- Anti-Microbial door handles can help combat bacteria and other microorganisms.
- Self-closing doors with locks on cam lift hinges provide 120° stay open feature for easy product loading.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Specially designed airflow system for effective temperature recovery for product preservation.
- Evaporator fans disengage when door is opened to maximize efficiency.
- External digital thermometer displays interior temperature.
- Refrigerators maintain product temperature of 36-38°F with high humidity coil for optimum product preservation.
- Freezers maintain product temperature of 0°F. Includes automatic defrost.
- Refrigerators utilize ozone friendly R134a refrigerant.
- Freezers utilize ozone friendly R404A refrigerant.
- Hot gas condensate evaporator (refrigerator/freezer only)
- Optional accessories available
- Roll-In/Roll-Thru.
- Stainless steel exterior Roll-In/Roll-Thru models.
- Workflow door handles for easy grip.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- External digital thermometer displays interior temperature.
- Roll-in models accommodate roll-in foodservice racks, 27" x 29" x 64".
- Optional accessories and tray slides available.

CONTACT FACTORY FOR MODEL AVAILABILITY AND LEAD TIMES.



OPTIONAL ACCESSORIES ON PAGE 8I



## REACH-IN REFRIGERATORS

SOLID AND HALF SOLID

Carrier

| MODEL SOLID               | MODEL HALF SOLID | LIST PRICE  |            | TYPE UNIT    | CRATED WEIGHT                               | F.O.B. | CU.FT. | CABINET BODY INCHES W x D x H | CABINET BODY METRIC (MM) W x D x H | VOLTS | AMPS | HP  | SHELVES |
|---------------------------|------------------|---|------------|--------------|---|--------|--------|-------------------------------|------------------------------------|-------|------|-----|---------|
|                           |                  | SOLID   | HALF SOLID |              |   |        |        |                               |                                    |       |      |     |         |
| ER24-1AS XDX              | ER24-1AHS XDX    | \$5258  | \$5352     | Refrigerator | 351   | BR     | 23.1   | 26"x 30"x 78 1/2"             | 660 x 762 x 1994                   | 115   | 5.7  | 1/4 | 3       |
| ER48-1AS XDX              | ER48-1AHS XDX    | \$6770  | \$7231     | Refrigerator | 562   | BR     | 46.6   | 52"x 30"x 78 1/2"             | 1321 x 762 x 1994                  | 115   | 9.4  | 1/3 | 6       |
| ER74-1AS XDX              | ER74-1AHS XDX    | \$9187  | \$10034    | Refrigerator | 791   | BR     | 74     | 78"x 30"x 78 1/2"             | 1981 x 762 x 1994                  | 115   | 10.6 | 1/2 | 9       |
| Export voltages available |                  | For total depth add 2" for door and 1 3/4" for handle |            |              | For total height add 6" for legs or casters |        |        |                               | BR= Brookville, PA                 |       |      |     |         |

CONTACT FACTORY FOR MODEL AVAILABILITY AND LEAD TIMES.

### DESIGNED WITH PATENTED XSTREAM® VALVE TECHNOLOGY FROM XDX®

- Stainless steel exterior cabinet face.
- Gray coated steel exterior sides for extra durability.
- Anodized Aluminum interior to prevent corrosion.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Workflow door handles for easy grip.
- Self-closing doors on cam lift hinges provide 120° stay open feature for easy product loading.
- Locks are standard on solid doors only.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Field re-hingeable doors are standard on full and half length door models.
- Adjustable epoxy coated steel wire shelves, standard (three per section).
- Specially designed airflow system for effective temperature recovery and product preservation.
- Evaporator fans disengage when door is opened to maximize efficiency (excludes bottom doors on half door units).
- External digital thermometer displays interior temperature.
- Refrigerators maintain product temperature of 36-38°F with high humidity coil for optimum product preservation.
- Six inch heavy-duty casters included, two with brakes.
- Refrigerators utilize ozone friendly R134a refrigerant.
- Hot gas condensate evaporator.
- Cord and plug furnished on 115-volt models, Dual voltage (115/208-230) models require field wiring.
- Standard incandescent bulb.
- Optional tray slides available.

What makes the E series unique?

- Down duct air system (Except ER/EF24)
- Field reversible, pre-drilled, pre-tapped holes
- 120° stay open feature
- Cam lift hinges
- Top mount refrigeration system
- Designed with patented Xstream® Valve technology from XDX

### TOP MOUNT E+PLUS SERIES

XSTREAM® valve technology was developed by XDX® Innovative Refrigeration and is made available through Beverage-Air's parent company, Carrier Corporation. This proprietary technology changes the characteristics of the refrigerant flow pattern through the evaporator to create an environment that is more energy-efficient, with faster pull-down, and better temperature and humidity control.



DIGITAL THERMOMETER

E+PLUS



## REACH-IN FREEZERS

## SOLID AND HALF SOLID

| MODEL SOLID               | MODEL HALF SOLID | LIST SOLID  | PRICE HALF SOLID | TYPE UNIT | CRATED WEIGHT | F.O.B. | CU.FT. | CABINET BODY INCHES W x D x H               | CABINET BODY METRIC (MM) W x D x H | VOLTS          | AMPS               | HP  | SHELVES |
|---------------------------|------------------|---|------------------|-----------|---------------|--------|--------|---|------------------------------------|----------------|--------------------|-----|---------|
| EF24-1AS XDX              | EF24-1AHS XDX    | \$6329  | \$6395           | Freezer   | 377           | BR     | 23.1   | 26"x 30"x 78 1/2"                           | 660 x 762 x 1994                   | 115            | 10.2               | 1/2 | 3       |
| EF48-1AS XDX              | EF48-1AHS XDX    | \$8597  | \$9060           | Freezer   | 727           | BR     | 46.6   | 52"x 30"x 78 1/2"                           | 1321 x 762 x 1994                  | 115            | 14.5               | 3/4 | 6       |
| EF74-5AS XDX              | EF74-5AS XDX     | \$11465   | \$12370          | Freezer   | 873           | BR     | 74     | 78"x 30"x 78 1/2"                           | 1981 x 762 x 1994                  | 208-230<br>115 | 10.5               | 1   | 9       |
| Export voltages available |                  | For total depth add 2" for door and 1 3/4" for handle |                  |           |               |        |        | For total height add 6" for legs or casters |                                    |                | BR= Brookville, PA |     |         |

CONTACT FACTORY FOR MODEL AVAILABILITY AND LEAD TIMES.

## BEVERAGE-AIR HAS SPECIALIZED CABINETS TO MEET YOUR NEEDS

### DESIGNED WITH PATENTED XSTREAM® VALVE TECHNOLOGY FROM XDX®

XSTREAM® valve technology was developed by XDX® Innovative Refrigeration and is made available through Beverage-Air's parent company, Carrier Corporation. This proprietary technology changes the characteristics of the refrigerant flow pattern through the evaporator to create an environment that is more energy-efficient, with faster pull-down, and better temperature and humidity control.

- Stainless steel exterior cabinet face.
- Gray coated steel exterior sides for extra durability.
- Anodized Aluminum interior to prevent corrosion.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Workflow door handles for easy grip.
- Self-closing doors on cam lift hinges provide 120° stay open feature for easy product loading.
- Locks are standard on solid doors only.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Field re-hingeable doors are standard on full and half length door models.
- Adjustable epoxy coated steel wire shelves, standard (three per section).
- Specially designed airflow system for effective temperature recovery and product preservation.
- Evaporator fans disengage when door is opened to maximize efficiency.
- External digital thermometer displays interior temperature.
- Freezers maintain product temperature of 0°F. Includes automatic defrost.
- Six inch heavy-duty casters included, two with brakes.
- Freezers utilize ozone friendly R404A refrigerant.
- Hot gas condensate evaporator.
- Cord and plug furnished on 115-volt models. Dual voltage (115/208-230) models require field wiring.
- Standard incandescent bulb.
- Optional tray slides available.



### TOP MOUNT E+PLUS SERIES

## REACH-IN REFRIGERATORS

### GLASS AND HALF GLASS



| MODEL<br>GLASS | MODEL<br>HALF<br>GLASS | LIST PRICE |               | TYPE<br>UNIT | CRATED<br>WEIGHT | F.O.B. | CU.FT. | CABINET BODY<br>INCHES<br>W x D x H |  | CABINET BODY<br>METRIC (MM)<br>W x D x H |  | VOLTS | AMPS | HP  | SHELVES |
|----------------|------------------------|------------|---------------|--------------|------------------|--------|--------|-------------------------------------|--|--|--|-------|------|-----|---------|
|                |                        | GLASS      | HALF<br>GLASS |              |                  |        |        |                                     |  |  |  |       |      |     |         |
| ER24-1AG XDX   | ER24-1AHG XDX          | \$5990     | \$6308        | Refrigerator | 351              | BR     | 23.1   | 26"x 30"x 78 1/2"                   |  | 660 x 762 x 1994                         |  | 115   | 5.7  | 1/4 | 3       |
| ER48-1AG XDX   | ER48-1AHG XDX          | \$8445     | \$9081        | Refrigerator | 562              | BR     | 46.6   | 52"x 30"x 78 1/2"                   |  | 1321 x 762 x 1994                        |  | 115   | 9.4  | 1/3 | 6       |
| ER74-1BG XDX   | ER74-1BHG XDX          | \$11464    | \$12375       | Refrigerator | 841              | BR     | 74     | 78"x 30"x 78 1/2"                   |  | 1981 x 762 x 1994                        |  | 115   | 12.0 | 3/4 | 9       |

Export voltages available

For total depth add 2" for door and 1 3/4" for handle

For total height add 6" for legs or casters

BR= Brookville, PA

CONTACT FACTORY FOR MODEL AVAILABILITY AND LEAD TIMES.

### INDUSTRY LEADING AIR FLOW MANAGEMENT DESIGN



### DESIGNED WITH PATENTED XSTREAM® VALVE TECHNOLOGY FROM XDX®

XSTREAM® valve technology was developed by XDX® Innovative Refrigeration and is made available through Beverage-Air's parent company, Carrier Corporation. This proprietary technology changes the characteristics of the refrigerant flow pattern through the evaporator to create an environment that is more energy-efficient, with faster pull-down, and better temperature and humidity control.

- Stainless steel exterior cabinet face.
- Gray coated steel exterior sides for extra durability.
- Anodized Aluminum interior to prevent corrosion.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Workflow door handles for easy grip.
- Self-closing doors on cam lift hinges provide 120° stay open feature for easy product loading.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Field re-hingeable doors are standard on full and half length door models.
- Adjustable epoxy coated steel wire shelves, standard (three per section).
- Specially designed airflow system for effective temperature recovery and product preservation.
- Evaporator fans disengage when door is opened to maximize efficiency (excludes bottom doors on half door units).
- External digital thermometer displays interior temperature.
- Refrigerators maintain product temperature of 36-38°F with high humidity coil for optimum product preservation.
- Six inch heavy-duty casters included, two with brakes.
- Refrigerators utilize ozone friendly R134a refrigerant. ER74 uses R404A refrigerant.
- Hot gas condensate evaporator.
- Cord and plug furnished on 115-volt models. Dual voltage (115/208-230) models require field wiring.
- Standard fluorescent bulb.
- Optional tray slides available.

E+PLUS

### TOP MOUNT E+PLUS SERIES

21



BEVERAGE-AIR



## REACH-IN FREEZERS

## GLASS AND HALF GLASS

| MODEL GLASS  | MODEL HALF GLASS | LIST GLASS | PRICE HALF GLASS | TYPE UNIT | CRATED WEIGHT | F.O.B. | CU.FT. | CABINET BODY INCHES W x D x H | CABINET BODY METRIC (MM) W x D x H | VOLTS       | AMPS | HP  | SHELVES |
|--------------|------------------|------------|------------------|-----------|---------------|--------|--------|-------------------------------|------------------------------------|-------------|------|-----|---------|
| EF24-1BG XDX | EF24-5BHG XDX    | \$7334     | \$7804           | Freezer   | 398           | BR     | 23.1   | 26"x 30"x 78 1/2"             | 660 x 762 x 1994                   | 115         | 10.0 | 3/4 | 3       |
| EF48-5BG XDX | EF48-5BHG XDX    | \$10822    | \$11754          | Freezer   | 649           | BR     | 46.6   | 52"x 30"x 78 1/2"             | 1321 x 762 x 1994                  | 208-230 115 | 6.2  | 1   | 6       |
| EF74-5BG XDX | EF74-5BHG XDX    | \$14997    | \$16400          | Freezer   | 924           | BR     | 74     | 78"x 30"x 78 1/2"             | 1981 x 762 x 1994                  | 208-230 115 | 16.0 | 1.5 | 9       |

Export voltages available For total depth add 2" for door and 1 3/4" for handle

For total height add 6" for legs or casters

BR= Brookville, PA

CONTACT FACTORY FOR MODEL AVAILABILITY AND LEAD TIMES.

OPTIONAL ACCESSORIES ON PAGE 81

## DESIGNED WITH PATENTED XSTREAM® VALVE TECHNOLOGY FROM XDX®

XSTREAM® valve technology was developed by XDX® Innovative Refrigeration and is made available through Beverage-Air's parent company, Carrier Corporation. This proprietary technology changes the characteristics of the refrigerant flow pattern through the evaporator to create an environment that is more energy-efficient, with faster pull-down, and better temperature and humidity control.

- Stainless steel exterior cabinet face.
- Gray coated steel exterior sides for extra durability.
- Anodized Aluminum interior to prevent corrosion.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Workflow door handles for easy grip.
- Self-closing doors on cam lift hinges provide 120° stay open feature for easy product loading.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Field re-hingeable doors are standard on full and half length door models.
- Adjustable epoxy coated steel wire shelves, standard (three per section).
- Specially designed airflow system for effective temperature recovery and product preservation.
- Evaporator fans disengage when door is opened to maximize efficiency (excludes bottom doors on half door units).
- External digital thermometer displays interior temperature.
- Freezers maintain product temperature of 0°F. Includes automatic defrost.
- Six inch heavy-duty casters included, two with brakes.
- Freezers utilize ozone friendly R404A refrigerant.
- Hot gas condensate evaporator.
- Cord and plug furnished on 115-volt models. Dual voltage (115/208-230) models require field wiring.
- Standard fluorescent bulb.
- Optional tray slides available.



TOP MOUNT E+PLUS SERIES



Turn to the Experts.™



REACH-INS



## REACH-INS

DURABLE CONSTRUCTION ENSURES LASTING QUALITY AND PERFORMANCE. OFFERED IN A WIDE ARRAY OF MODELS, OUR VERSATILE LINE OF REACH-IN EQUIPMENT OFFERS SOLUTIONS THAT WORK BEST FOR YOU.

## REACH-IN REFRIGERATORS

SOLID AND HALF SOLID



Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.

| MODEL SOLID | MODEL HALF SOLID | LIST SOLID | PRICE HALF SOLID | TYPE UNIT    | CRATED WEIGHT | F.O.B. | CU.FT. | CABINET BODY INCHES W x D x H | CABINET BODY METRIC (MM) W x D x H | VOLTS | AMPS | HP  | SHELVES |
|-------------|------------------|------------|------------------|--------------|---------------|--------|--------|-------------------------------|------------------------------------|-------|------|-----|---------|
| ER24-1AS    | ER24-1AHS        | \$4573     | \$4780           | Refrigerator | 351           | BR     | 23.1   | 26"x 30"x 78 1/2"             | 660 x 762 x 1994                   | 115   | 5.7  | 1/4 | 3       |
| ER34-1AS    | N/A              | \$5757     | N/A              | Refrigerator | 351           | BR     | 34     | 35"x 30"x 78 1/2"             | 889 x 762 x 1994                   | 115   | 7.3  | 1/3 | 3       |
| ER48-1AS    | ER48-1AHS        | \$6046     | \$6457           | Refrigerator | 562           | BR     | 46.6   | 52"x 30"x 78 1/2"             | 1321 x 762 x 1994                  | 115   | 9.4  | 1/3 | 6       |
| ER74-1AS    | ER74-1AHS        | \$8352     | \$8959           | Refrigerator | 791           | BR     | 74     | 78"x 30"x 78 1/2"             | 1981 x 762 x 1994                  | 115   | 10.6 | 1/2 | 9       |

Export voltages available For total depth add 2" for door and 1 3/4" for handle

For total height add 6" for legs or casters

BR= Brookville, PA



Contact factory for a list of ENERGY STAR® certified models.



DIGITAL THERMOMETER

- Stainless steel exterior cabinet face.
- Gray coated steel exterior sides for extra durability.
- Anodized Aluminum interior to prevent corrosion.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Workflow door handles for easy grip.
- Self-closing doors on cam lift hinges provide 120° stay open feature for easy product loading.
- Locks are standard on solid doors only.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Field re-hingeable doors are standard on full and half length door models.
- Adjustable epoxy coated steel wire shelves, standard (three per section).
- Specially designed airflow system for effective temperature recovery and product preservation.
- Evaporator fans disengage when door is opened to maximize efficiency (excludes bottom doors on half door units).
- External digital thermometer displays interior temperature.
- Refrigerators maintain product temperature of 36-38°F with high humidity coil for optimum product preservation.
- Six inch heavy-duty casters included, two with brakes.
- Refrigerators utilize ozone friendly R134a refrigerant.
- Hot gas condensate evaporator.
- Cord and plug furnished on 115-volt models. Dual voltage (115/208-230) models require field wiring.
- Standard incandescent bulb.
- Optional tray slides available.

## What makes the E series unique?

- Down duct air system (Except ER/EF24)
- Field reversible, pre-drilled, pre-tapped holes
- 120° stay open feature
- Cam lift hinges
- Top mount refrigeration system

## TOP MOUNT E-SERIES





## REACH-IN FREEZERS

SOLID AND HALF SOLID



**ASK ABOUT ENERGY STAR** Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.

| MODEL SOLID | MODEL HALF SOLID | LIST SOLID | PRICE HALF SOLID | TYPE UNIT | CRATED WEIGHT | F.O.B. | CU.FT. | CABINET BODY INCHES W x D x H | CABINET BODY METRIC (MM) W x D x H | VOLTS          | AMPS | HP  | SHELVES |
|-------------|------------------|------------|------------------|-----------|---------------|--------|--------|-------------------------------|------------------------------------|----------------|------|-----|---------|
| EF24-1AS    | EF24-1AHS        | \$5504     | \$5710           | Freezer   | 377           | BR     | 23.1   | 26"x 30"x 78 1/2"             | 660 x 762 x 1994                   | 115            | 10.2 | 1/2 | 3       |
| EF34-1BS    | N/A              | \$7297     | N/A              | Freezer   | 538           | BR     | 34     | 35"x 30"x 78 1/2"             | 889 x 762 x 1994                   | 115            | 10.0 | 3/4 | 3       |
| EF48-1AS    | EF48-1AHS        | \$7676     | \$8090           | Freezer   | 727           | BR     | 46.6   | 52"x 30"x 78 1/2"             | 1321 x 762 x 1994                  | 115            | 14.5 | 3/4 | 6       |
| EF74-5AS    | EF74-5AS         | \$10423    | \$11044          | Freezer   | 873           | BR     | 74     | 78"x 30"x 78 1/2"             | 1981 x 762 x 1994                  | 208-230<br>115 | 10.5 | 1   | 9       |

Export voltages available For total depth add 2" for door and 1 3/4" for handle For total height add 6" for legs or casters BR= Brookville, PA

## BEVERAGE-AIR HAS SPECIALIZED CABINETS TO MEET YOUR NEEDS



Contact factory for a list of ENERGY STAR® certified models.

- Stainless steel exterior cabinet face.
- Gray coated steel exterior sides for extra durability.
- Anodized Aluminum interior to prevent corrosion.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Workflow door handles for easy grip.
- Self-closing doors on cam lift hinges provide 120° stay open feature for easy product loading.
- Locks are standard on solid doors only.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Field re-hingeable doors are standard on full and half length door models.
- Adjustable epoxy coated steel wire shelves, standard (three per section).
- Specially designed airflow system for effective temperature recovery and product preservation.
- Evaporator fans disengage when door is opened to maximize efficiency (excludes bottom doors of half door units).
- External digital thermometer displays interior temperature.
- Freezers maintain product temperature of 0°F. Includes automatic defrost.
- Six inch heavy-duty casters included, two with brakes.
- Freezers utilize ozone friendly R404A refrigerant.
- Hot gas condensate evaporator.
- Cord and plug furnished on 115-volt models. Dual voltage (115/208-230) models require field wiring.
- Standard incandescent bulb.
- Optional tray slides available.



REACH-INS

## TOP MOUNT E-SERIES



**BEVERAGE-AIR**

## REACH-IN REFRIGERATORS

### GLASS AND HALF GLASS

| MODEL<br>GLASS | MODEL<br>HALF<br>GLASS | LIST PRICE |               | TYPE<br>UNIT | CRATED<br>WEIGHT | F.O.B. | CU.FT. | CABINET BODY<br>INCHES<br>W x D x H | CABINET BODY<br>METRIC (MM)<br>W x D x H | VOLTS | AMPS | HP  | SHELVES |
|----------------|------------------------|------------|---------------|--------------|------------------|--------|--------|-------------------------------------|--|-------|------|-----|---------|
|                |                        | GLASS      | HALF<br>GLASS |              |                  |        |        |                                     |  |       |      |     |         |
| ER24-1AG       | ER24-1AHG              | \$5348     | \$5633        | Refrigerator | 351              | BR     | 23.1   | 26"x 30"x 78 1/2"                   | 660 x 762 x 1994                         | 115   | 5.7  | 1/4 | 3       |
| ER48-1AG       | ER48-1AHG              | \$7541     | \$8109        | Refrigerator | 562              | BR     | 46.6   | 52"x 30"x 78 1/2"                   | 1321 x 762 x 1994                        | 115   | 9.4  | 1/3 | 6       |
| ER74-1BG       | ER74-1BHG              | \$10237    | \$11050       | Refrigerator | 841              | BR     | 74     | 78"x 30"x 78 1/2"                   | 1981 x 762 x 1994                        | 115   | 12.0 | 3/4 | 9       |

Export voltages available    For total depth add 2" for door and 1 3/4" for handle    For total height add 6" for legs or casters    BR= Brookville, PA

### INDUSTRY LEADING AIR FLOW MANAGEMENT DESIGN



- Stainless steel exterior cabinet face.
- Gray coated steel exterior sides for extra durability.
- Anodized Aluminum interior to prevent corrosion.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Workflow door handles for easy grip.
- Self-closing doors on cam lift hinges provide 120° stay open feature for easy product loading.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Field re-hingeable doors are standard on full and half length door models.
- Adjustable epoxy coated steel wire shelves, standard (three per section).
- Specially designed airflow system for effective temperature recovery and product preservation.
- Evaporator fans disengage when door is opened to maximize efficiency (excludes bottom doors on half door units).
- External digital thermometer displays interior temperature.
- Refrigerators maintain product temperature of 36-38°F with high humidity coil for optimum product preservation.
- Six inch heavy-duty casters included, two with brakes.
- Refrigerators utilize ozone friendly R134a refrigerant. ER74 uses R404A refrigerant.
- Hot gas condensate evaporator.
- Cord and plug furnished on 115-volt models. Dual voltage (115/208-230) models require field wiring.
- Standard fluorescent bulb.
- Optional tray slides available.

### TOP MOUNT E-SERIES

## REACH-IN FREEZERS

### GLASS AND HALF GLASS



| MODEL GLASS | MODEL HALF GLASS | LIST GLASS | PRICE HALF GLASS | TYPE UNIT | CRATED WEIGHT | F.O.B. | CU.FT. | CABINET BODY INCHES W x D x H | CABINET BODY METRIC (MM) W x D x H | VOLTS       | AMPS | HP  | SHELVES |
|-------------|------------------|------------|------------------|-----------|---------------|--------|--------|-------------------------------|------------------------------------|-------------|------|-----|---------|
| EF24-1BG    | EF24-5BHG        | \$6548     | \$6967           | Freezer   | 398           | BR     | 23.1   | 26" x 30" x 78 1/2"           | 660 x 762 x 1994                   | 115         | 10.0 | 3/4 | 3       |
| EF48-5BG    | EF48-5BHG        | \$9662     | \$10495          | Freezer   | 649           | BR     | 46.6   | 52" x 30" x 78 1/2"           | 1321 x 762 x 1994                  | 208-230 115 | 6.2  | 1   | 6       |
| EF74-5BG    | EF74-5BHG        | \$13390    | \$14643          | Freezer   | 924           | BR     | 74     | 78" x 30" x 78 1/2"           | 1981 x 762 x 1994                  | 208-230 115 | 16.0 | 1.5 | 9       |

Export voltages available

For total depth add 2" for door and 1 3/4" for handle

For total height add 6" for legs or casters

BR= Brookville, PA

### OPTIONAL ACCESSORIES ON PAGE 81

- Stainless steel exterior cabinet face.
- Gray coated steel exterior sides for extra durability.
- Anodized Aluminum interior to prevent corrosion.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Workflow door handles for easy grip.
- Self-closing doors on cam lift hinges provide 120° stay open feature for easy product loading.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Field re-hingeable doors are standard on full and half length door models.
- Adjustable epoxy coated steel wire shelves, standard (three per section).
- Specially designed airflow system for effective temperature recovery and product preservation.
- Evaporator fans disengage when door is opened to maximize efficiency. (excludes bottom doors on half door units).
- External digital thermometer displays interior temperature.
- Freezers maintain product temperature of 0°F. Includes automatic defrost.
- Six inch heavy-duty casters included, two with brakes.
- Freezers utilize ozone friendly R404A refrigerant.
- Hot gas condensate evaporator.
- Cord and plug furnished on 115-volt models. Dual voltage (115/208-230) models require field wiring.
- Standard fluorescent bulb.
- Optional tray slides available.



REACH-INS

### TOP MOUNT E-SERIES





REACH-IN  
REFRIGERATORS



Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.

| MODEL    | LIST PRICE | TYPE UNIT    | CRATED WEIGHT | F.O.B. | DOORS | CU.FT. | CABINET BODY INCHES W x D x H | CABINET BODY METRIC (MM) W x D x H | VOLTS | AMPS | HP  | SHELVES |
|----------|------------|--------------|---------------|--------|-------|--------|-------------------------------|------------------------------------|-------|------|-----|---------|
| KR24-1AS | \$4172     | Refrigerator | 350           | BR     | 1     | 20.7   | 27" x 31" x 82"               | 680 x 786 x 2082                   | 115   | 5.7  | 1/4 | 3       |
| KR48-1AS | \$5570     | Refrigerator | 521           | BR     | 2     | 44.9   | 54" x 31" x 82"               | 1370 x 786 x 2082                  | 115   | 9.4  | 1/3 | 6       |
| KR74-1AS | \$8080     | Refrigerator | 680           | BR     | 3     | 69.2   | 82" x 31" x 82"               | 2082 x 786 x 2082                  | 115   | 15.0 | 1/2 | 9       |
| RI18-HGS | \$4253     | Refrigerator | 338           | BR     | 2     | 18     | 27 1/4" x 27 1/2" x 73"       | 692 x 699 x 1854                   | 115   | 5.9  | 1/4 | 4       |

BR= Brookville, PA

LOCKING SHELF CLIPS FOR EASY  
PRODUCT LOADING

OPTIONAL ACCESSORIES ON PAGE 8I



Contact factory for a list of ENERGY STAR® certified models.



- Stainless steel exterior cabinet face.
- Gray coated steel exterior sides for extra durability.
- White coated steel interior walls with stainless steel floor.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Workflow door handles for easy grip.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Adjustable epoxy coated steel wire shelves, standard (three per section).
- Locking shelf clips, standard
- Enhanced digital control displays interior temperature and includes a "door open indicator".
- Refrigerators maintain product temperature of 36-38°F with high humidity coil for optimum product preservation.
- Three inch heavy-duty casters included, two with brakes.
- Refrigerators utilize ozone friendly R134a refrigerant.
- Cord and plug furnished on 115-volt models. Dual voltage (115/208-230) models require field wiring.
- Optional shelves available.



ENHANCED DIGITAL CONTROL  
ADDS FUNCTION

BOTTOM MOUNT K-SERIES





## REACH-IN FREEZERS



ASK ABOUT ENERGY STAR Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.

| MODEL    | LIST PRICE | TYPE UNIT | CRATED WEIGHT | F.O.B. | DOORS | CU.FT. | CABINET BODY INCHES W x D x H | CABINET BODY METRIC (MM) W x D x H | VOLTS          | AMPS | HP  | SHELVES |
|----------|------------|-----------|---------------|--------|-------|--------|-------------------------------|------------------------------------|----------------|------|-----|---------|
| KF24-1AS | \$5184     | Freezer   | 375           | BR     | 1     | 20.7   | 27" x 31" x 82"               | 680 x 786 x 2082                   | 115            | 10.6 | 3/4 | 3       |
| KF48-1AS | \$7127     | Freezer   | 585           | BR     | 2     | 44.9   | 54" x 31" x 82"               | 1370 x 786 x 2082                  | 115            | 14.5 | 3/4 | 6       |
| KF74-5AS | \$10513    | Freezer   | 690           | BR     | 3     | 69.2   | 82" x 31" x 82"               | 2082 x 786 x 2082                  | 208-230<br>115 | 10.5 | 1   | 9       |

Export voltages available

For total depth add 2" for door and 1 3/4" for handle

BR= Brookville, PA



### ENHANCED DIGITAL CONTROL ADDS FUNCTION

### BOTTOM MOUNT DESIGN FOR EASY PREVENTATIVE MAINTENANCE



Contact factory for a list of ENERGY STAR® certified models.

- Stainless steel exterior cabinet face.
- Gray coated steel exterior sides for extra durability.
- White coated steel interior walls with stainless steel floor.
- Two inch CFC free foamed-in-place polyurethane insulation , for added strength and energy efficiency.
- Workflow door handles for easy grip.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Adjustable epoxy coated steel wire shelves, standard (three per section).
- Enhanced digital control displays interior temperature and includes a "door open indicator".
- Locking shelf clips, standard
- Freezers maintain product temperature of 0°F. Includes automatic defrost.
- Three inch heavy-duty casters included, two with brakes.
- Freezers utilize ozone friendly R404A refrigerant.
- Cord and plug furnished on 115-volt models. Dual voltage (115/208-230) models require field wiring.
- Optional shelves available.



## BOTTOM MOUNT K-SERIES

REACH-INS



## REACH-IN REFRIGERATORS AND FREEZERS

## DUAL TEMPERATURE REFRIGERATORS AND FREEZERS

| MODEL                       | LIST PRICE | TYPE UNIT | CRATED WEIGHT | F.O.B. | CU. FT.    | CABINET BODY INCHES W x D x H | CABINET BODY METRIC (MM) W x D x H | VOLTS | AMPS     | HP      | SHELVES |
|-----------------------------|------------|-----------|---------------|--------|------------|-------------------------------|------------------------------------|-------|----------|---------|---------|
| PRF12-12-IAHS-02 Half Solid | \$10188    | Dual      | 412           | BR     | 9.1/ 9.1   | 26"x 30"x 78 1/2"             | 660 x 762 x 1994                   | 115   | 4.5/5.7  | 1/4/1/3 | 4       |
| PRF24-24-IAS-02 Solid       | \$12958    | Dual      | 727           | BR     | 23.1/ 23.1 | 52"x 30"x 78 1/2"             | 1321 x 762 x 1994                  | 115   | 5.7/10.0 | 1/4/1/2 | 6       |
| PRF24-24-IAHS-02 Half Solid | \$13385    | Dual      | 727           | BR     | 23.1/ 23.1 | 52"x 30"x 78 1/2"             | 1321 x 762 x 1994                  | 115   | 5.7/10.0 | 1/4/1/2 | 6       |
| PRF48-24-IAS-02 Solid       | \$15141    | Dual      | 924           | BR     | 46.6/23.1  | 78"x 30"x 78 1/2"             | 1981 x 762 x 1994                  | 115   | 9.4/10.6 | 1/3-1/2 | 9       |
| PRF48-24-IAHS-02 Half Solid | \$15763    | Dual      | 924           | BR     | 46.6/23.1  | 78"x 30"x 78 1/2"             | 1981 x 762 x 1994                  | 115   | 9.4/10.6 | 1/3-1/2 | 9       |

Export voltages available For total depth add 2" for door and 1 3/4" for handle For total height add 6" for legs or casters

BR= Brookville, PA

## OPTIONAL ACCESSORIES ON PAGE 81

## STAINLESS STEEL INTERIOR AND EXTERIOR

- Stainless steel interior and exterior.
- Workflow door handles for easy grip.
- Self-closing doors on cam lift hinges provide 120° stay open feature for easy product loading.
- Locks are standard on solid doors only.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Field re-hingeable doors are standard on full and half length door models.
- Adjustable epoxy coated steel wire shelves, standard (three per section).
- Specially designed airflow system for effective temperature recovery and product preservation.
- Evaporator fans disengage when door is opened to maximize efficiency (excludes bottom doors on half door units).
- Exterior mounted thermometers are LED digital display.
- Refrigerators maintain product temperature of 36-38°F with high humidity coil for optimum product preservation.
- Freezers maintain product temperature of 0°F.
- Optional accessories and tray slides available.

PRF12-12



PRF24-24



PRF48-24



## TOP MOUNT P-SERIES

| MODEL  | LIST PRICE | TYPE UNIT       | FOB | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | CORE PROBE | CHILLING CYCLE PRODUCTION PER HOUR POUNDS | FREEZING CYCLE PRODUCTION PER HOUR POUNDS | PAN CAPACITY                | VOLTS             |
|--------|------------|-----------------|-----|-------------------------------|------------------------------------|------------|---|---|-----------------------------|-------------------|
| BAC5   | \$12228    | Chiller         | SP  | 29" x 31" x 41"               | 745 x 790 x 1040                   | •          | 40  | -   | 4                           | *220 V 60 Hz 1 Ph |
| BAC10  | \$19680    | Chiller         | SP  | 29" x 31" x 70"               | 745 x 790 x 1770                   | •          | 79  | -   | 8                           | *220 V 60 Hz 3 Ph |
| BAC12  | \$25225    | Chiller         | SP  | 38" x 39" x 74"               | 960 x 995 x 1880                   | •          | 112                                       | -   | 7 full size<br>14 half size | *220 V 60 Hz 3 Ph |
| BACF5  | \$14228    | Chiller/Freezer | SP  | 29" x 31" x 41"               | 745 x 790 x 1040                   | •          | 44  | 26  | 4                           | *220 V 60 Hz 1 Ph |
| BACF10 | \$22792    | Chiller/Freezer | SP  | 29" x 31" x 69 7/10"          | 745 x 790 x 1770                   | •          | 93  | 55  | 8                           | *220 V 60 Hz 3 Ph |
| BACF12 | \$29425    | Chiller/Freezer | SP  | 38" x 39" x 74"               | 960 x 995 x 1880                   | •          | 115                                       | 55  | 7 full size<br>14 half size | *220 V 60 Hz 3 Ph |

\*Conduit connected must be hardwired

SP= Spartanburg, SC

BR= Brookville, PA

TRANSITION FROM SPARTANBURG DISTRIBUTION CENTER TO BROOKVILLE  
DISTRIBUTION CENTER IN 2006 CONTACT FACTORY FOR WAREHOUSE LOCATION.

### OPTIONAL ACCESSORIES ON PAGE 81

- Outside surfaces and chilling cavity in 304 stainless.
- Chilling cavity with rounded corners and opening on the bottom for liquid drainage.
- High Density injected CFC-free polyurethane foam insulation with 2.4 inch thickness.
- Hinged fan cover for easy access to the evaporator and fan during cleaning.
- Removable rack and guides in 304 stainless steel on all models.
- Insulated door with self-closing device and full height handle.
- Automatic door switch stops fan operation when door is open.
- Double ventilation speed for the blast chiller/freezer.
- Cylindrical adjustable feet in stainless steel with thermo-hard material sole.
- Support or work upper surface for 35" h models, with or without rear upstand.
- BCF models feature electronic control panel with the following: blast chilling and blast freezing controlled by core probe or by timer, digital read-out of the chilling cavity or of core product temperature, holding mode automatic section and normal or low temperature, either after chilling or freezing cycles.
- Chilling cycle from 158 to 37 degrees fahrenheit in 1 1/2 hour.
- Freezing cycle from 158 to 0 degrees fahrenheit in 4 hours.
- Performance guaranteed in temperatures up to 109 degrees fahrenheit.
- For the right application of the HACCP System (Hazard Analysis Critical Control Point), the use of the blast chiller is the only means to reduce the risks concerning cooked food not immediately served.

### MERGING THE CONCEPTS OF FOOD SAFETY AND WORK EFFICIENCY



REACH-INS

### BLAST CHILLERS

## BLAST CHILLERS

## BLAST CHILLERS/BLAST CHILLER FREEZERS

| MODEL   | LIST PRICE | TYPE UNIT       | FOB | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | CORE PROBE | CHILLING CYCLE PRODUCTION PER HOUR POUNDS | FREEZING CYCLE PRODUCTION PER HOUR POUNDS | PAN CAPACITY                | VOLTS             |
|---------|------------|-----------------|-----|-------------------------------|------------------------------------|------------|---|---|-----------------------------|-------------------|
| BAC5P   | \$13895    | Chiller         | SP  | 29" x 31" x 41"               | 745 x 790 x 1040                   | •          | 40  | -   | 4                           | *220 V 60 Hz 1 Ph |
| BAC10P  | \$21347    | Chiller         | SP  | 29" x 31" x 70"               | 745 x 790 x 1770                   | •          | 79  | -   | 8                           | *220 V 60 Hz 3 Ph |
| BACP12P | \$26893    | Chiller         | SP  | 38" x 39" x 74"               | 960 x 995 x 1880                   | •          | 112                                       | -   | 7 full size<br>14 half size | *220 V 60 Hz 3 Ph |
| BACF5P  | \$15895    | Chiller/Freezer | SP  | 29" x 31" x 41"               | 745 x 790 x 1040                   | •          | 44  | 26  | 4                           | *220 V 60 Hz 1 Ph |
| BACF10P | \$24460    | Chiller/Freezer | SP  | 29" x 31" x 69 7/10"          | 745 x 790 x 1770                   | •          | 93  | 55  | 8                           | *220 V 60 Hz 3 Ph |
| BACF12P | \$31092    | Chiller/Freezer | SP  | 38" x 39" x 74"               | 960 x 995 x 1880                   | •          | 115                                       | 55  | 7 full size<br>14 half size | *220 V 60 Hz 3 Ph |

\*Conduit connected must be hardwired

SP=Spartanburg, SC

BR= Brookville, PA

CONTACT FACTORY FOR MODEL AVAILABILITY AND LEAD TIMES.

TRANSITION FROM SPARTANBURG DISTRIBUTION CENTER TO BROOKVILLE  
DISTRIBUTION CENTER IN 2006 CONTACT FACTORY FOR WAREHOUSE LOCATION.

## OPTIONAL ACCESSORIES ON PAGE 8I

MERGING THE CONCEPTS OF FOOD  
SAFETY AND WORK EFFICIENCY



- Outside surfaces and chilling cavity in 304 stainless.
- Chilling cavity with rounded corners and opening on the bottom for liquid drainage.
- High Density injected CFC-free polyurethane foam insulation with 2.4 inch thickness.
- Hinged fan cover for easy access to the evaporator and fan during cleaning.
- Removable rack and guides in 304 stainless steel on all models.
- Insulated door with self-closing device and full height handle.
- Automatic door switch stops fan operation when door is open.
- Double ventilation speed for the blast chiller/freezer.
- Cylindrical adjustable feet in stainless steel with thermo-hard material sole.
- Support or work upper surface for 35" h models, with or without rear upstand.
- BCF models feature electronic control panel with the following: blast chilling and blast freezing controlled by core probe or by timer, digital read-out of the chilling cavity or of core product temperature, holding mode automatic section and normal or low temperature, either after chilling or freezing cycles.
- Chilling cycle from 158 to 37 degrees fahrenheit in 1 1/2 hour.
- Freezing cycle from 158 to 0 degrees fahrenheit in 4 hours.
- Performance guaranteed in temperatures up to 109 degrees fahrenheit.
- For the right application of the HACCP System (Hazard Analysis Critical Control Point), the use of the blast chiller is the only means to reduce the risks concerning cooked food not immediately served.
- Script recorders available. Contact factory.

## BLAST CHILLERS





Turn to the Experts.™

FOOD PREPARATION



## FOOD PREPARATION TABLES

YOUR ONE-STOP SHOP FOR FOOD PREPARATION EQUIPMENT. SUPERIOR IN QUALITY, BEVERAGE-AIR® OFFERS A COMPLETE LINE OF SANDWICH/SALAD/PIZZA PREP TABLES, WORKTOP COOK STANDS AND BLAST CHILLER/FREEZERS FOR VIRTUALLY ANY TYPE OF SETTING. OUR TOUGH FOOD PREPARATION EQUIPMENT IS ENGINEERED TO ENDURE THE MOST RUGGED WORK ENVIRONMENT AND DESIGNED TO HANDLE A LUNCH TIME RUSH DAY AFTER DAY AND YEAR AFTER YEAR.

## SANDWICH/SALAD PREPARATION TABLES

STANDARD TOP MODELS

PANS FEATURE THE EXCLUSIVE



MAINTAINS PRODUCT BETWEEN 33° AND 41° F

INSULATED LIDS

FRONT AIR BREATHING

CASTERS

CHOOSE ENERGY-EFFICIENT PRODUCTS WITH THE ENERGY STAR® LABEL. IT'S AN EASY WAY TO PROTECT THE ENVIRONMENT WHILE ALSO SAVING MONEY.

CONTACT FACTORY FOR A LIST OF ENERGY STAR CERTIFIED MODELS



ASK ABOUT ENERGY STAR Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.

## OPTIONAL ACCESSORIES ON PAGE 81

- Stainless steel exterior front and sides.
- Anodized aluminum interior to prevent corrosion.
- Self-closing doors on cam lift hinges with 120° stay open feature for easy product loading.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Low energy consumption and operating cost based on independent test study.
- Front air breathing allows for built-in applications. Some special precautions may apply.
- Insulated lids to ensure constant temperature and reduced energy consumption.
- Refrigerated pan opening provides even pan temperature with the exclusive "Cold Air Blanket™".
- Interior liner duct maintains airflow under food service pans and prevents food spillage from entering cabinet interior.
- Accommodates six inch deep food service pans, four inch deep polycarbonate pans included.
- Ten inch deep cutting board, standard.
- Adjustable epoxy coated steel wire shelves, standard (two per section).
- Six inch casters, two with brakes standard.
- Balanced refrigeration system operates at 36-38°F for optimum food preservation with ambient temperature below 84°F.
- Refrigeration system utilizes ozone friendly R134a refrigerant.
- Optional accessories and tray slides available.



## SANDWICH PREPARATION STANDARD TOP

# SANDWICH/SALAD PREPARATION TABLES



## STANDARD TOP MODELS




## FOOD PREPARATION TABLES

| MODEL   | LIST PRICE | CRATED WEIGHT | F.O.B. | DOORS  | FINISH | CU. FT. | OVERALL EXT. INCHES W x D x H | VOLTS | AMPS | HP  | SHELVES | STANDARD PANS 4" DEEP |
|---------|------------|---------------|--------|--------|--------|---------|-------------------------------|-------|------|-----|---------|-----------------------|
| SP27-08 | \$2898     | 187           | BR     | 1      | S/S    | 7.3     | 27" x 29 1/4" x 41 1/2"       | 115   | 4.0  | 1/6 | 2       | 6-1/6 size/2-1/9 size |
| SPD27   | \$4195     | 207           | BR     | DRAWER | S/S    | 7.0     | 27" x 29 1/4" x 41 1/2"       | 115   | 4.0  | 1/6 | NA      | 6-1/6 size/2-1/9 size |
| SP48-08 | \$4039     | 263           | BR     | 2      | S/S    | 13.9    | 48" x 29 1/4" x 41 1/2"       | 115   | 4.5  | 1/5 | 4       | 8-1/6 size            |
| SP48-10 | \$4304     | 267           | BR     | 2      | S/S    | 13.9    | 48" x 29 1/4" x 41 1/2"       | 115   | 4.5  | 1/5 | 4       | 10-1/6 size           |
| SP48-12 | \$4465     | 270           | BR     | 2      | S/S    | 13.9    | 48" x 29 1/4" x 41 1/2"       | 115   | 4.5  | 1/5 | 4       | 12-1/6 size           |
| SP60-08 | \$4645     | 339           | BR     | 2      | S/S    | 17.1    | 60" x 29 1/4" x 41 1/2"       | 115   | 7.0  | 1/4 | 4       | 8-1/6 size            |
| SP60-10 | \$4684     | 340           | BR     | 2      | S/S    | 17.1    | 60" x 29 1/4" x 41 1/2"       | 115   | 7.0  | 1/4 | 4       | 10-1/6 size           |
| SP60-12 | \$4729     | 335           | BR     | 2      | S/S    | 17.1    | 60" x 29 1/4" x 41 1/2"       | 115   | 7.0  | 1/4 | 4       | 12-1/6 size           |
| SP60-16 | \$4761     | 329           | BR     | 2      | S/S    | 17.1    | 60" x 29 1/4" x 41 1/2"       | 115   | 7.0  | 1/4 | 4       | 16-1/6 size           |
| SP72-08 | \$5272     | 390           | BR     | 3      | S/S    | 21.5    | 72" x 29 1/4" x 41 1/2"       | 115   | 7.5  | 1/4 | 6       | 8-1/6 size            |
| SP72-10 | \$5316     | 385           | BR     | 3      | S/S    | 21.5    | 72" x 29 1/4" x 41 1/2"       | 115   | 7.5  | 1/4 | 6       | 10-1/6 size           |
| SP72-12 | \$5361     | 386           | BR     | 3      | S/S    | 21.5    | 72" x 29 1/4" x 41 1/2"       | 115   | 7.5  | 1/4 | 6       | 12-1/6 size           |
| SP72-18 | \$5437     | 381           | BR     | 3      | S/S    | 21.5    | 72" x 29 1/4" x 41 1/2"       | 115   | 7.5  | 1/4 | 6       | 18-1/6 size           |


Export voltages available For total depth add 1" for handle BR= Brookville, PA



SP27-8 TOP VIEW




SP48-8 TOP VIEW




SP48-10 TOP VIEW


SP END VIEW STANDARD TOP




SP48-12 TOP VIEW

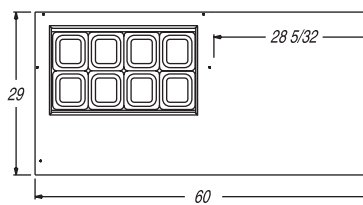


SP60-8 TOP VIEW

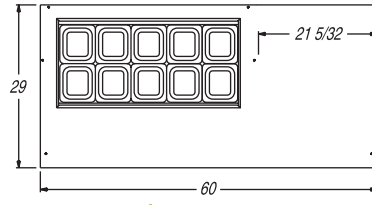


SP60-10 TOP VIEW

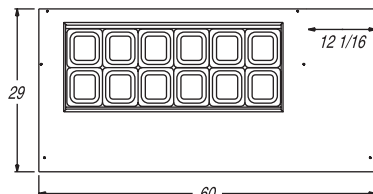


SP60-12 TOP VIEW

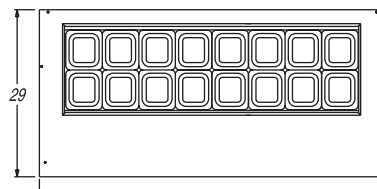


SP60-16 TOP VIEW

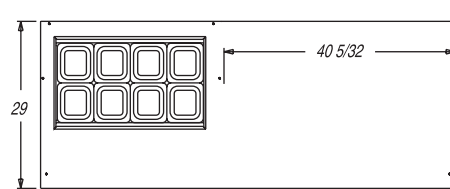


SP72-8 TOP VIEW

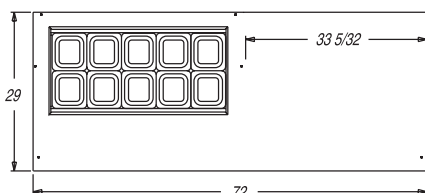

SP72-10 TOP VIEW

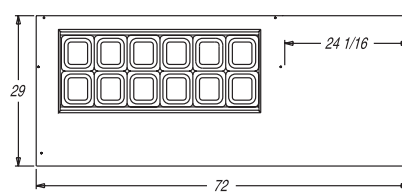

SP72-12 TOP VIEW

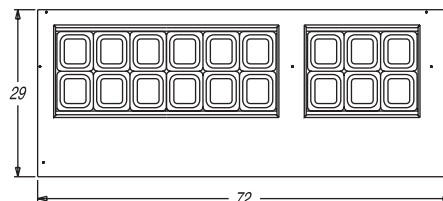

SP72-18 TOP VIEW



BEVERAGE-AIR

## SANDWICH/SALAD PREPARATION TABLES

MEGA TOP MODELS

PANS FEATURE THE EXCLUSIVE



MAINTAINS PRODUCT BETWEEN 33° AND 41° F

CHOOSE ENERGY-EFFICIENT PRODUCTS WITH THE ENERGY STAR® LABEL. IT'S AN EASY WAY TO PROTECT THE ENVIRONMENT WHILE ALSO SAVING MONEY.

CONTACT FACTORY FOR A LIST OF ENERGY STAR CERTIFIED MODELS



Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.



MEGA TOP MODELS PROVIDE EXTRA ROWS OF PANS

- Stainless steel exterior front and sides.
- Anodized aluminum interior to prevent corrosion.
- Self-closing doors on cam lift hinges with 120° stay open feature for easy product loading.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Low energy consumption and operating cost based on independent test study.
- Front air breathing allows for built-in applications. Some special precautions may apply.
- Insulated lids to ensure constant temperature and reduced energy consumption.
- Refrigerated pan opening provides even pan temperature with the exclusive "Cold Air Blanket™".
- Interior liner duct maintains airflow under food service pans and prevents food spillage from entering cabinet interior.
- Accommodates six inch deep food service pans, four inch deep polycarbonate pans included.
- Ten inch deep cutting board, standard.
- Adjustable epoxy coated steel wire shelves, standard (two per section).
- Six inch casters, two with brakes standard.
- Balanced refrigeration system operates at 36-38°F for optimum food preservation with ambient temperature below 84°F.
- Refrigeration system utilizes ozone friendly R134a refrigerant.
- Optional accessories and tray slides available.

OPTIONAL ACCESSORIES ON PAGE 81

SANDWICH PREPARATION MEGA TOP MODELS



# SANDWICH/SALAD PREPARATION TABLES

MEGA TOP MODELS














| MODEL    | LIST PRICE | CRATED WEIGHT | F.O.B. | DOORS | FINISH | CU. FT. | OVERALL EXT. INCHES W x D x H | VOLTS | AMPS | HP  | SHELVES | STANDARD PANS 4" DEEP                    |
|----------|------------|---------------|--------|-------|--------|---------|-------------------------------|-------|------|-----|---------|--|
| SP27-12M | \$3479     | 205           | BR     | 1     | S/S    | 7.3     | 27" x 34" x 45 1/2"           | 115   | 4.0  | 1/6 | 2       | 9-1/6 size<br>3-1/9 size                 |
| SP48-12M | \$4968     | 300           | BR     | 2     | S/S    | 13.9    | 48" x 34" x 45 1/2"           | 115   | 4.5  | 1/5 | 4       | 6-1/6 size<br>2-1/2 size                 |
| SP48-18M | \$5064     | 302           | BR     | 2     | S/S    | 13.9    | 48" x 34" x 45 1/2"           | 115   | 4.5  | 1/5 | 4       | 6-1/6 size<br>2-1/2 size<br>1 full size  |
| SP60-12M | \$5374     | 338           | BR     | 2     | S/S    | 17.1    | 48" x 34" x 45 1/2"           | 115   | 7.0  | 1/4 | 4       | 6-1/6 size<br>2-1/2 size                 |
| SP60-18M | \$5466     | 360           | BR     | 2     | S/S    | 17.1    | 60" x 34" x 45 1/2"           | 115   | 7.0  | 1/4 | 4       | 6-1/6 size<br>2-1/2 size<br>1 full size  |
| SP60-24M | \$5567     | 363           | BR     | 2     | S/S    | 17.1    | 60" x 34" x 45 1/2"           | 115   | 7.0  | 1/4 | 4       | 12-1/6 size<br>2-1/2 size<br>1 full size |
| SP72-12M | \$6108     | 402           | BR     | 3     | S/S    | 21.5    | 72" x 34" x 45 1/2"           | 115   | 7.5  | 1/4 | 6       | 6-1/6 size<br>2-1/2 size                 |
| SP72-18M | \$6176     | 418           | BR     | 3     | S/S    | 21.5    | 72" x 34" x 45 1/2"           | 115   | 7.5  | 1/4 | 6       | 6-1/6 size<br>2-1/2 size<br>1 full size  |
| SP72-24M | \$6282     | 402           | BR     | 3     | S/S    | 21.5    | 72" x 34" x 45 1/2"           | 115   | 7.5  | 1/4 | 6       | 12-1/6 size<br>2-1/2 size<br>1 full size |
| SP72-30M | \$6399     | 430           | BR     | 3     | S/S    | 21.5    | 72" x 34" x 45 1/2"           | 115   | 7.5  | 1/4 | 6       | 18-1/6 size<br>2-1/2 size<br>1 full size |

Export voltages available

For total depth add 1" for handle

BR= Brookville, PA

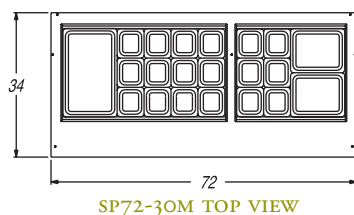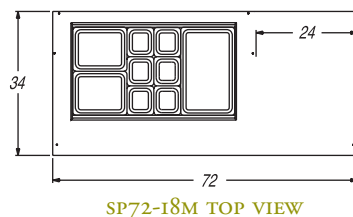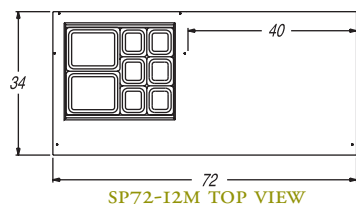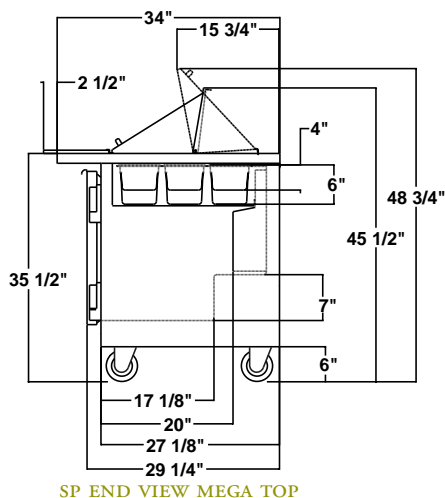

FOOD PREPARATION TABLES



## SANDWICH/SALAD PREPARATION TABLES

## CUTTING TOP MODELS

PANS FEATURE THE EXCLUSIVE



MAINTAINS PRODUCT BETWEEN 33° AND 41° F

EXTRA-WIDE CUTTING BOARD PROVIDES OPTIONAL USES SUCH AS DELI/PIZZA PREP

OPTIONAL ACCESSORIES ON PAGE 8I



ASK ABOUT  
ENERGY  
STAR Choose energy-efficient products with the  
ENERGY STAR® label. It's an easy way  
to protect the environment while also saving money.



- Stainless steel exterior front and sides.
- Anodized aluminum interior to prevent corrosion.
- Self-closing doors on cam lift hinges with 120° stay open feature for easy product loading.
- Snap-in magnetic gaskets for a positive seal and easy removal or cleaning.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Low energy consumption and operating cost based on independent test study.
- Front air breathing allows for built-in applications. Some special precautions may apply.
- Insulated lids to ensure constant temperature and reduced energy consumption.
- Refrigerated pan opening provides even pan temperature with the exclusive "Cold Air Blanket™".
- Interior liner duct maintains airflow under food service pans and prevents food spillage from entering cabinet interior.
- Accommodates six inch deep food service pans, four inch deep polycarbonate pans included.
- Seventeen inch deep cutting board, standard.
- Adjustable epoxy coated steel wire shelves, standard (two per section).
- Six inch casters, two with brakes standard.
- Balanced refrigeration system operates at 36-38°F for optimum food preservation with ambient temperature below 84°.
- Refrigeration system utilizes ozone friendly R134a refrigerant.
- Optional accessories and tray slides available.

SANDWICH PREPARATION CUTTING TOP MODELS

# SANDWICH/SALAD PREPARATION TABLES

## CUTTING TOP MODELS




| MODEL    | LIST PRICE | CRATED WEIGHT | F.O.B. | DOORS | FINISH | CU. FT. | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | VOLTS | AMPS | HP  | SHELVES | STANDARD PANS 4" DEEP |
|----------|------------|---------------|--------|-------|--------|---------|-------------------------------|------------------------------------|-------|------|-----|---------|-----------------------|
| SP27-08C | \$3259     | 200           | BR     | 1     | S/S    | 7.3     | 27" x 29 1/4" x 41 1/2"       | 686 x 743 x 1054                   | 115   | 4.0  | 1/6 | 2       | 6-1/6 size/2-1/9 size |
| SP48-08C | \$4702     | 292           | BR     | 2     | S/S    | 13.9    | 48" x 29 1/4" x 41 1/2"       | 1219 x 743 x 1054                  | 115   | 4.5  | 1/5 | 4       | 8-1/6 size            |
| SP48-10C | \$4735     | 296           | BR     | 2     | S/S    | 13.9    | 48" x 29 1/4" x 41 1/2"       | 1219 x 743 x 1054                  | 115   | 4.5  | 1/5 | 4       | 10-1/6 size           |
| SP48-12C | \$4775     | 300           | BR     | 2     | S/S    | 13.9    | 48" x 29 1/4" x 41 1/2"       | 1219 x 743 x 1054                  | 115   | 4.5  | 1/5 | 4       | 12-1/6 size           |
| SP60-08C | \$5201     | 359           | BR     | 2     | S/S    | 17.1    | 60" x 29 1/4" x 41 1/2"       | 1524 x 743 x 1054                  | 115   | 7.0  | 1/4 | 4       | 8-1/6 size            |
| SP60-10C | \$5233     | 359           | BR     | 2     | S/S    | 17.1    | 60" x 29 1/4" x 41 1/2"       | 1524 x 743 x 1054                  | 115   | 7.0  | 1/4 | 4       | 10-1/6 size           |
| SP60-12C | \$5264     | 359           | BR     | 2     | S/S    | 17.1    | 60" x 29 1/4" x 41 1/2"       | 1524 x 743 x 1054                  | 115   | 7.0  | 1/4 | 4       | 12-1/6 size           |
| SP60-16C | \$5316     | 359           | BR     | 2     | S/S    | 17.1    | 60" x 29 1/4" x 41 1/2"       | 1524 x 743 x 1054                  | 115   | 7.0  | 1/4 | 4       | 16-1/6 size           |
| SP72-08C | \$5805     | 417           | BR     | 3     | S/S    | 21.5    | 72" x 29 1/4" x 41 1/2"       | 1829 x 743 x 1054                  | 115   | 7.5  | 1/4 | 6       | 8-1/6 size            |
| SP72-10C | \$5851     | 415           | BR     | 3     | S/S    | 21.5    | 72" x 29 1/4" x 41 1/2"       | 1829 x 743 x 1054                  | 115   | 7.5  | 1/4 | 6       | 10-1/6 size           |
| SP72-12C | \$5884     | 413           | BR     | 3     | S/S    | 21.5    | 72" x 29 1/4" x 41 1/2"       | 1829 x 743 x 1054                  | 115   | 7.5  | 1/4 | 6       | 12-1/6 size           |
| SP72-18C | \$5961     | 404           | BR     | 3     | S/S    | 21.5    | 72" x 29 1/4" x 41 1/2"       | 1829 x 743 x 1054                  | 115   | 7.5  | 1/4 | 6       | 18-1/6 size           |

Export voltages available

For total depth add 1" for handle

BR= Brookville, PA

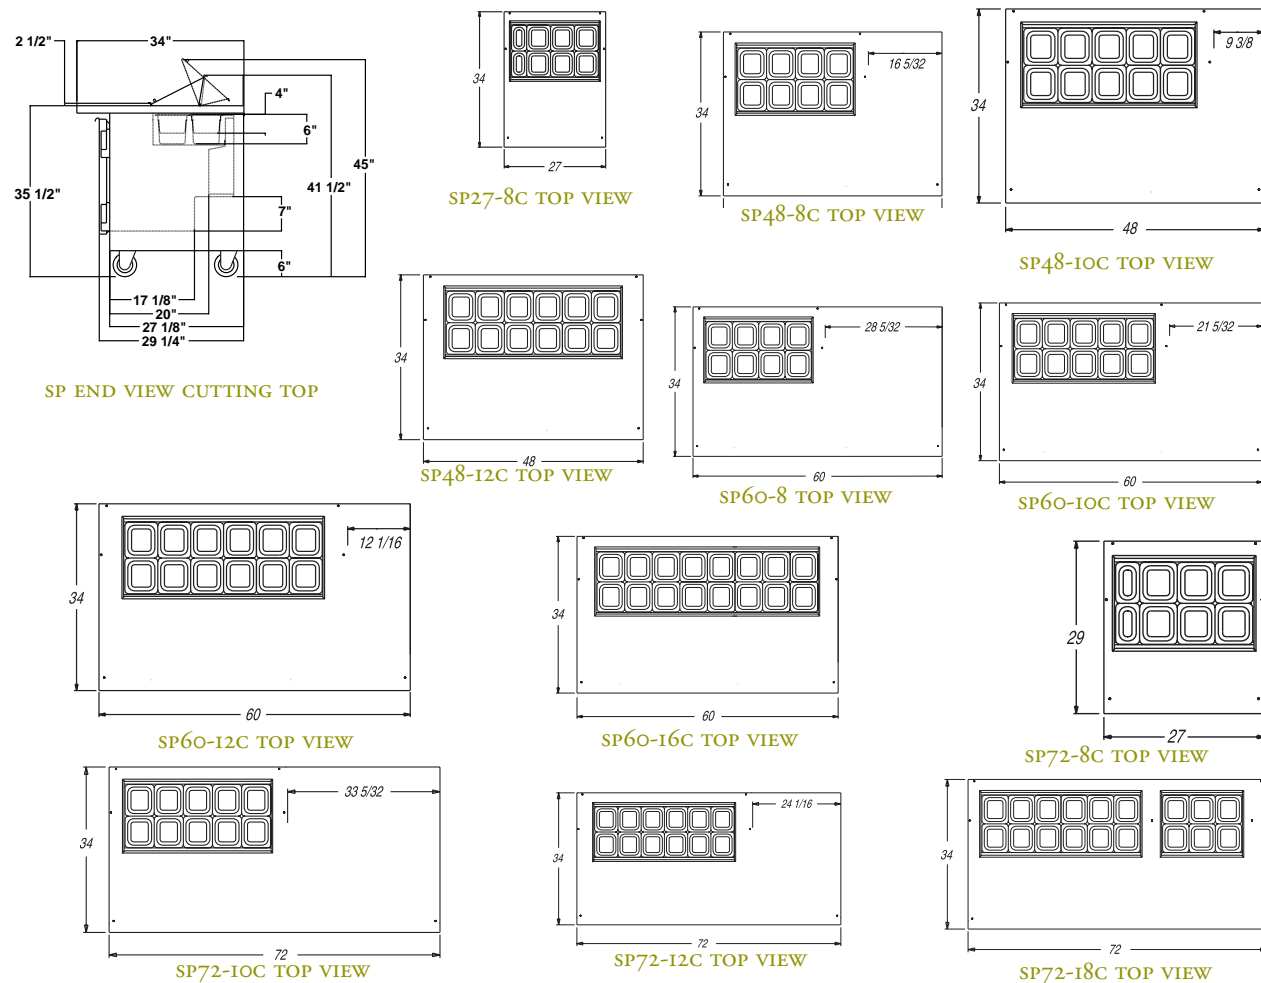

FOOD PREPARATION TABLES



PANS FEATURE THE EXCLUSIVE

# COLD AIR BLANKET

MAINTAINS PRODUCT BETWEEN 33° AND 41° F

OPTIONAL ACCESSORIES ON PAGE 81

HOLDS 18" X 26" SHEET PANS

CONTACT FACTORY FOR A LIST OF ENERGY STAR CERTIFIED MODELS



Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.



- Stainless steel exterior front and sides.
- Anodized aluminum interior to prevent corrosion.
- Self-closing doors on cam lift hinges with 120° stay open feature for easy product loading.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Refrigerated pan opening provides even pan temperature with the exclusive "Cold Air Blanket™".
- Insulated lids to ensure constant temperature and reduced energy consumption.
- Raised refrigerated pan rail accommodates six inch deep food service pans and provides even pan temperature plus prevents food spillage into cabinet interior.
- Food service pans are not included.
- Nineteen inch deep cutting board.
- Adjustable epoxy coated steel wire shelves, standard (two per section).
- Three inch casters, two with brakes standard.
- Balanced refrigeration system to operate 36-38°F.
- Refrigeration system utilizes ozone friendly R134a refrigerant.
- Optional drawers, tray slides and accessories available.

DELI/PIZZA




| MODEL | LIST PRICE | CRATED WEIGHT | F.O.B. | DOORS | CU.FT. | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | VOLTS | AMPS | HP  | SHELVES | CAPACITY FULL SIZE PANS |
|-------|------------|---------------|--------|-------|--------|-------------------------------|------------------------------------|-------|------|-----|---------|-------------------------|
| DP46  | \$5179     | 320           | BR     | 1     | 16.7   | 46" x 32" x 41 1/2"           | 610 x 813 x 1651                   | 115   | 6.8  | 1/4 | 2       | 2                       |
| DP67  | \$7283     | 410           | BR     | 2     | 27.0   | 67" x 32" x 41 1/2"           | 610 x 813 x 1651                   | 115   | 6.8  | 1/4 | 4       | 3                       |
| DP93  | \$9862     | 541           | BR     | 3     | 39.8   | 93" x 32" x 41 1/2"           | 660 x 813 x 2096                   | 115   | 8.6  | 1/3 | 6       | 4                       |
| DP119 | \$13772    | 677           | BR     | 4     | 52.5   | 119" x 32" x 41 1/2"          | 660 x 813 x 2096                   | 115   | 8.6  | 1/3 | 8       | 5                       |


Export voltages available

For total depth add 1" for handle


BR= Brookville, PA

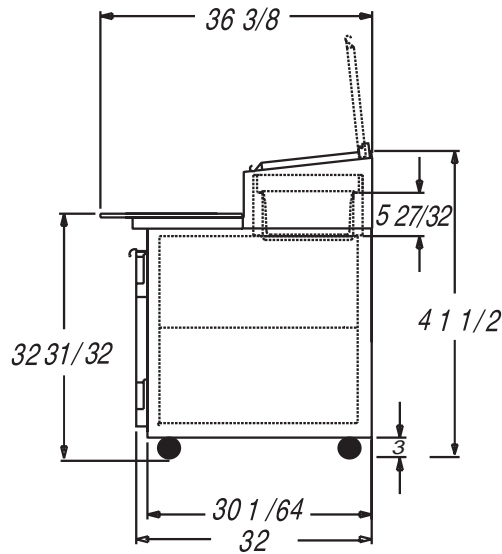




DP END VIEW





DP46

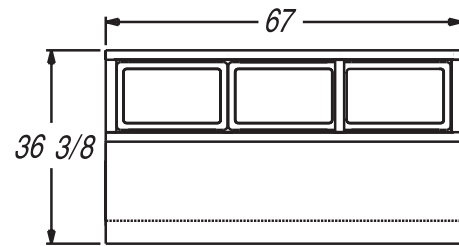


DP67

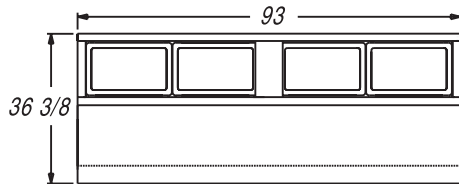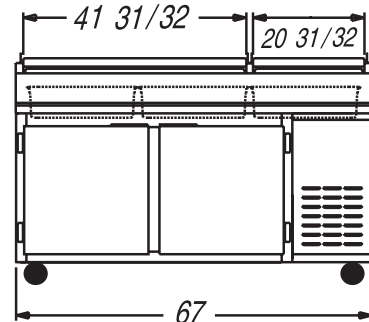

DP93

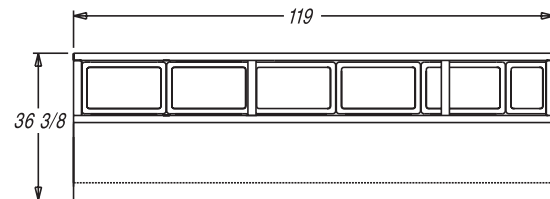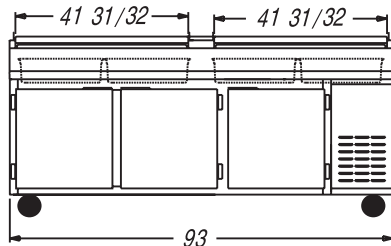

DP119

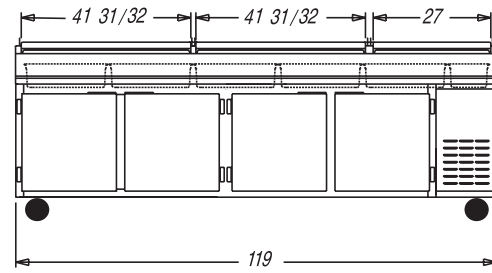

## WORKTOP COOK STAND

## REFRIGERATORS

| MODEL      | LIST PRICE | CRATED WEIGHT | F.O.B. | DRAWERS | FINISH | CU.FT. | OVERALL EXT. INCHES<br>W x D x H | OVERALL EXT. METRIC (MM)<br>W x D x H | VOLTS | AMPS | HP  |
|------------|------------|---------------|--------|---------|--------|--------|----------------------------------|---------------------------------------|-------|------|-----|
| WTRCS52-1  | \$8143     | 416           | BR     | 2       | S/S    | 9.7    | 52" x 32" x 26 3/4"              | 1321 x 813 x 679                      | 115   | 4.5  | 1/5 |
| WTRCS84-1  | \$9895     | 540           | BR     | 4       | S/S    | 17.5   | 84" x 32" x 26 3/4"              | 2134 x 813 x 679                      | 115   | 4.5  | 1/5 |
| WTRCS112-1 | \$12275    | 720           | BR     | 6       | S/S    | 24.5   | 112" x 32" x 26 3/4"             | 2845 x 813 x 679                      | 115   | 7.3  | 1/4 |

Export voltages available

BR= Brookville, PA

WTRCS52

SHOWN WITH GRIDDLE NOT INCLUDED



WTRCS84



WTRCS112

## STAINLESS STEEL TOP STANDARD

- Stainless steel exterior and top standard.
- Stainless steel top insulated to eliminate heat penetration into cabinet interior.
- Reinforced cabinet interior structure.
- Heavy duty 12 gauge drawer frame and slides designed with three stainless steel ball bearing wheels per slide to allow for maximum capacity and full drawer extension.
- Side by side drawer configuration accommodates two 12" w x 20" d food service pans placed side by side for easy access of food product.
- Top drawers accommodate six inch deep food service pans.
- Bottom drawers accommodate four inch deep food service pans.
- Food service pans are not included.
- Workflow drawer handles for easy grip.
- Snap-in magnetic gaskets for a positive seal and easy removal for cleaning.
- Heavy-duty stainless steel full marine drip-guard edge to prevent spills.
- Interior is constructed of corrosion resistant 300 series stainless steel.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Exterior digital thermometer monitors interior temperature.
- Front air breathing allows for built-in applications. Some percation may apply.
- Lift-out refrigeration system.
- Balanced refrigeration system operates at 36-38°F for optimum food preservation.
- Refrigeration system utilizes ozone friendly R134a refrigerant.
- Heavy-duty six inch casters, two with brakes standard.

## WORKTOP REFRIGERATORS



Turn to the Experts.™



UNDERCOUNTER

## UNDERCOUNTER, WORKTOP

BUILT WITH YOUR PROFITS IN MIND. BEVERAGE-AIR® UNDERCOUNTER AND WORKTOP EQUIPMENT ALLOW TOTAL FLEXIBILITY IN YOUR ORGANIZATION'S DESIGN, WHILE MAXIMIZING EFFICIENCY. THAT'S WHY OUR UNDERCOUNTER/WORKTOP REFRIGERATORS AND FREEZERS ARE ENGINEERED FOR A WIDE VARIETY OF APPLICATIONS, FROM COUNTERS TO BACKBARS - INCREASING YOUR WORKSPACE AND VERSATILITY.

## WORKTOP

## REFRIGERATORS AND FREEZERS

| MODEL   | LIST PRICE | TYPE UNIT    | CRATED WEIGHT | F.O.B. | DOORS   | FINISH | CU. FT. | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | VOLTS | AMPS | HP  | SHELVES |
|---------|------------|--------------|---------------|--------|---------|--------|---------|-------------------------------|------------------------------------|-------|------|-----|---------|
| WTR27A  | \$2589     | Refrigerator | 167           | BR     | 1       | S/S    | 6.2     | 27" x 29 1/4" x 39 1/2"       | 686 x 743 x 1003                   | 115   | 4.0  | 1/6 | 2       |
| WTRD27A | \$3827     | Refrigerator | 184           | BR     | DRAWERS | S/S    | 6.2     | 27" x 29 1/4" x 39 1/2"       | 686 x 743 x 1003                   | 115   | 4.0  | 1/6 | -       |
| WTF27A  | \$2989     | Freezer      | 165           | BR     | 1       | S/S    | 6.2     | 27" x 29 1/4" x 39 1/2"       | 686 x 743 x 1003                   | 115   | 6.0  | 1/4 | 2       |
| WTR48A  | \$3871     | Refrigerator | 242           | BR     | 2       | S/S    | 11.8    | 48" x 29 1/4" x 39 1/2"       | 1219 x 743 x 1003                  | 115   | 4.5  | 1/5 | 4       |
| WTF48A  | \$4323     | Freezer      | 250           | BR     | 2       | S/S    | 11.8    | 48" x 29 1/4" x 39 1/2"       | 1219 x 743 x 1003                  | 115   | 7.0  | 1/3 | 4       |
| WTR60A  | \$4298     | Refrigerator | 271           | BR     | 2       | S/S    | 14.5    | 60" x 29 1/4" x 39 1/2"       | 1524 x 743 x 1003                  | 115   | 6.5  | 1/4 | 4       |
| WTR72A  | \$4903     | Refrigerator | 330           | BR     | 3       | S/S    | 17.7    | 72" x 29 1/4" x 39 1/2"       | 1829 x 743 x 1003                  | 115   | 6.5  | 1/4 | 6       |
| WTR46A  | \$4775     | Refrigerator | 296           | BR     | 1       | S/S    | 16.7    | 46" x 32" x 39 1/2"           | 1168 x 813 x 1003                  | 115   | 6.3  | 1/4 | 2       |
| WTR67A  | \$6026     | Refrigerator | 410           | BR     | 2       | S/S    | 27.0    | 67" x 32" x 39 1/2"           | 1702 x 813 x 1003                  | 115   | 6.3  | 1/4 | 4       |
| WTF67A  | \$6967     | Freezer      | 425           | BR     | 2       | S/S    | 27.0    | 67" x 32" x 39 1/2"           | 1702 x 813 x 1003                  | 115   | 8.6  | 3/4 | 4       |
| WTR93A  | \$7761     | Refrigerator | 486           | BR     | 3       | S/S    | 39.8    | 93" x 32" x 39 1/2"           | 2362 x 813 x 1003                  | 115   | 8.6  | 1/3 | 6       |
| WTR119A | \$9347     | Refrigerator | 604           | BR     | 4       | S/S    | 52.5    | 119" x 32" x 39 1/2"          | 3023 x 813 x 1003                  | 115   | 8.6  | 1/3 | 8       |

Export voltages available

For total depth add 1" for handle

BR= Brookville, PA

## OPTIONAL ACCESSORIES ON PAGE 81



Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.



- Stainless steel exterior front, top and sides.
- Anodized aluminum interior to prevent corrosion.
- Worktops constructed of 16-gauge stainless steel.
- Worktop 29" models include four inch high removable backsplash.
- Worktop 32" models include built-in backsplash.
- Self-closing doors on cam lift hinges with 120° stay open feature for easy product loading.
- Snap-in magnetic gaskets for a positive seal.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Front air breathing allows for built-in applications. Some special precautions may apply.
- Balanced refrigeration system operates at 36-38°F for optimum food preservation.
- Freezers operate at 0°F.
- Adjustable epoxy coated steel wire shelves, standard (two per section).
- Six inch casters, two with brakes standard.
- Refrigerators utilize ozone friendly R134a refrigerant.
- Freezers utilize ozone friendly R404A refrigerant.
- Pull out drawers standard on WTRD27 models.
- WTRD27 models accommodate one 12" x 20" x 6" (bottom drawer) and one 12" x 20" x 4" (top drawer) foodservice pans.
- Foodservice pans are not included.
- 4" Removable backsplash on WTR 27, 48, 60 & 72
- Consult factory for availability of optional glass doors, pullout drawers and/or tray slides.

## 29" AND 32" BASE MODELS





## UNDERCOUNTER REFRIGERATORS AND FREEZERS



| MODEL   | LIST PRICE | TYPE UNIT    | CRATED WEIGHT | F.O.B. | DOORS   | FINISH | CU. FT. | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | VOLTS | AMPS | HP  | SHELVES |
|---------|------------|--------------|---------------|--------|---------|--------|---------|-------------------------------|------------------------------------|-------|------|-----|---------|
| UCR27A  | \$2453     | Refrigerator | 157           | BR     | 1       | S/S    | 6.2     | 27" x 29 1/4" x 34 1/2"       | 686 x 743 x 876                    | 115   | 4.0  | 1/6 | 2       |
| UCRD27A | \$3723     | Refrigerator | 177           | BR     | DRAWERS | S/S    | 6.2     | 27" x 29 1/4" x 34 1/2"       | 686 x 743 x 876                    | 115   | 4.0  | 1/6 | -       |
| UCF27A  | \$2981     | Freezer      | 162           | BR     | 1       | S/S    | 6.2     | 27" x 29 1/4" x 34 1/2"       | 686 x 743 x 876                    | 115   | 6.0  | 1/4 | 2       |
| UCR48A  | \$3747     | Refrigerator | 230           | BR     | 2       | S/S    | 11.8    | 48" x 29 1/4" x 34 1/2"       | 1219 x 743 x 876                   | 115   | 4.5  | 1/5 | 4       |
| UCF48A  | \$4335     | Freezer      | 234           | BR     | 2       | S/S    | 11.8    | 48" x 29 1/4" x 34 1/2"       | 1219 x 743 x 876                   | 115   | 7.0  | 1/3 | 4       |
| UCR60A  | \$4175     | Refrigerator | 235           | BR     | 2       | S/S    | 14.5    | 60" x 29 1/4" x 34 1/2"       | 1524 x 743 x 876                   | 115   | 6.5  | 1/4 | 4       |
| UCR72A  | \$4723     | Refrigerator | 320           | BR     | 3       | S/S    | 17.7    | 72" x 29 1/4" x 34 1/2"       | 1829 x 743 x 876                   | 115   | 6.5  | 1/4 | 6       |
| UCR46A  | \$4195     | Refrigerator | 240           | BR     | 1       | S/S    | 16.7    | 46" x 32" x 34 1/2"           | 1168 x 813 x 876                   | 115   | 6.3  | 1/4 | 2       |
| UCR67A  | \$5388     | Refrigerator | 342           | BR     | 2       | S/S    | 27.0    | 67" x 32" x 34 1/2"           | 1702 x 813 x 876                   | 115   | 6.3  | 1/4 | 4       |
| UCF67A  | \$6289     | Freezer      | 405           | BR     | 2       | S/S    | 27.0    | 67" x 32" x 34 1/2"           | 1702 x 813 x 876                   | 115   | 8.6  | 3/4 | 4       |
| UCR93A  | \$6638     | Refrigerator | 442           | BR     | 3       | S/S    | 39.8    | 93" x 32" x 34 1/2"           | 2362 x 813 x 876                   | 115   | 8.6  | 1/3 | 6       |
| UCR119A | \$8205     | Refrigerator | 535           | BR     | 4       | S/S    | 52.5    | 119" x 32" x 34 1/2"          | 3023 x 813 x 876                   | 115   | 8.6  | 1/3 | 8       |

Export voltages available

For total depth add 1" for handle

BR= Brookville, PA

### UNDERCOUNTERS KEEP YOUR PERISHABLES COLD



**ASK ABOUT ENERGY STAR** Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.

- Stainless steel exterior front, sides and top.
- Anodized aluminum interior to prevent corrosion.
- Self-closing doors on cam lift hinges with 120° stay open feature for easy product loading.
- Snap-in magnetic gaskets for a positive seal.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency.
- Front air breathing allows for built-in applications on 27" and 48" refrigerators. Some special precautions may apply.
- Balanced refrigeration system operates at 36-38°F for optimum food preservation.
- Freezer system operate at 0°F.
- Adjustable epoxy coated steel wire shelves, standard (two per section).
- Six inch casters, two with brakes standard.
- Refrigerators utilize ozone friendly R134a refrigerant.
- Freezers utilize ozone friendly R404A refrigerant.
- UCR/UCF27 models are stackable with stacking collar.
- Pullout drawers standard on UCRD27 models.
- UCRD27 models accommodate one 12" x 20" x 6" (bottom drawer) and one 12" x 20" x 4" (top drawer) foodservice pans.
- Foodservice pans are not included.
- Consult factory for availability of optional glass doors, pullout drawers and/or tray slides.



UNDERCOUNTER, WORKTOP

## 29" AND 32" BASE MODELS



## UNDERCOUNTER

## REFRIGERATORS AND FREEZERS

| MODEL | LIST PRICE | TYPE UNIT    | CRATED WEIGHT | F.O.B. | DOORS | FINISH | CU. FT. | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | VOLTS | AMPS | HP  | SHELVES |
|-------|------------|--------------|---------------|--------|-------|--------|---------|-------------------------------|------------------------------------|-------|------|-----|---------|
| UCR20 | \$2233     | Refrigerator | 111           | BR     | 1     | S/S    | 2.7     | 20" x 20 1/2" x 31"           | 508 x 521 x 787                    | 115   | 3.5  | 1/6 | 2       |
| UCF20 | \$2637     | Freezer      | 119           | BR     | 1     | S/S    | 2.7     | 20" x 20 1/2" x 31"           | 508 x 521 x 787                    | 115   | 6.5  | 1/4 | 2       |
| UCR34 | \$3298     | Refrigerator | 158           | BR     | 2     | S/S    | 5.5     | 34" x 20 1/2" x 31"           | 864 x 521 x 787                    | 115   | 4.0  | 1/5 | 4       |
| UCR27 | \$2453     | Refrigerator | 157           | BR     | 1     | S/S    | 6.2     | 27" x 25 3/4" x 34 1/2"       | 686 x 654 x 876                    | 115   | 4.0  | 1/6 | 2       |

Export voltages available

For total depth add 1 1/2" for door and 1 1/2" for handle

BR= Brookville, PA

## SHALLOW DEPTH MODELS IDEAL FOR KIOSKS AND CART INSTALLATIONS



## OPTIONAL ACCESSORIES ON PAGE 81

- Uniquely designed to fit in limited space applications.
- Shallow depth models ideal for kiosks and cart installations.
- Stainless steel exterior front, sides and top.
- Anodized aluminum interior to prevent corrosion.
- CFC free foamed-in-place polyurethane insulation for added strength and energy efficiency.
- Self-closing doors on cam lift hinges with 120° stay open feature for easy product loading.
- Snap-in magnetic gaskets for a positive seal.
- Front air breathing allows for built-in applications. Some special precautions may apply.
- Balanced refrigeration system operates at 36-38°F for optimum food preservation.
- Freezers operate at 0°F.
- Epoxy coated steel wire shelves, standard.
- Refrigerators utilize ozone friendly R134a refrigerant.
- Freezers utilize ozone friendly R404A refrigerant.
- Six inch black adjustable legs, standard.
- Consult factory for availability of optional glass doors, stainless steel legs and/or casters.

20" AND 27" BASE MODELS



Turn to the Experts.™



BAR EQUIPMENT



## BAR EQUIPMENT

YOUR SOURCE FOR HIGH QUALITY BAR EQUIPMENT. BEVERAGE-AIR® MANUFACTURES A BROAD LINE OF BAR EQUIPMENT THAT FITS ALL OF YOUR REFRIGERATED BAR EQUIPMENT APPLICATIONS. WHEN YOU PURCHASE BAR EQUIPMENT FROM BEVERAGE-AIR®, YOU CAN REST ASSURED YOU WILL SERVE COLD BEVERAGES EVERY TIME. COLDER THAN YOU IMAGINED FOR LESS THAN YOU EXPECTED.

## DEEP WELL

## FROSTY BREW

| MODEL     | LIST PRICE | CRATED WEIGHT | F.O.B. | DOORS/ LIDS | FINISH | CU. FT. | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | VOLTS | AMPS | HP  | SHELVES/ DIVIDERS |
|-----------|------------|---------------|--------|-------------|--------|---------|-------------------------------|------------------------------------|-------|------|-----|-------------------|
| DW49-B-29 | \$3055     | 259           | BR     | 2           | B      | 13.3    | 50" x 261/2" x 33 3/4"        | 1270 x 673 x 857                   | 115   | 6.3  | 1/3 | 3                 |
| DW64-B-29 | \$3355     | 296           | BR     | 2           | B      | 18.5    | 65" x 261/2" x 33 3/4"        | 1651 x 673 x 857                   | 115   | 6.3  | 1/3 | 4                 |
| DW79-B-29 | \$4215     | 379           | BR     | 3           | B      | 23.2    | 80" x 261/2" x 33 3/4"        | 2032 x 673 x 857                   | 115   | 9.5  | 1/2 | 5                 |
| DW94-B-29 | \$4899     | 425           | BR     | 4           | B      | 28.5    | 95" x 261/2" x 33 3/4"        | 2413 x 673 x 857                   | 115   | 9.5  | 1/2 | 6                 |

Export voltages available

BR= Brookville, PA

| CAPACITIES |                              |                               |
|------------|------------------------------|-------------------------------|
| DW49       | 17 1/2 cases<br>23 3/4 cases | 12 oz. bottles<br>12 oz. cans |
| DW64       | 25 1/4 cases<br>34 3/4 cases | 12 oz. bottles<br>12 oz. cans |
| DW79       | 32 cases<br>45 3/4 cases     | 12 oz. bottles<br>12 oz. cans |
| DW94       | 39 cases<br>55 3/4 cases     | 12 oz. bottles<br>12 oz. cans |

COLDER THAN YOU IMAGINED FOR  
LESS THAN YOU EXPECTED



OPTIONAL ACCESSORIES ON PAGE 81



- Durable black steel exterior, standard.
- Stainless steel top, easy glide lids and counter top with edge.
- Stainless steel front available.
- Foamed-in-place polyurethane insulation for energy efficiency.
- Balanced refrigeration system provides rapid chilling of product.
- Adjustable epoxy coated dividers, Bottle Coolers.
- Bottle cap opener and cap catcher optional on DW models.
- Refrigeration system utilizes ozone friendly R134a refrigerant.
- Optional casters, legs and/or lid locks available.
- High RPM Fans provide greater cooling.
- Featuring oversized self defrosting evaporator.
- Maintains product temperature at or below 32° Fahrenheit.

FROSTY BREW



| MODEL   | LIST PRICE | CRATED WEIGHT | F.O.B. | DOORS/ LIDS | FINISH | CU. FT. | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | VOLTS | AMPS | HP  | SHELVES/ DIVIDERS |
|---------|------------|---------------|--------|-------------|--------|---------|-------------------------------|------------------------------------|-------|------|-----|-------------------|
| DW49-B  | \$2732     | 259           | BR     | 2           | B      | 13.3    | 50" x 26 1/2" x 33 3/4"       | 1270 x 673 x 857                   | 115   | 6.3  | 1/3 | 3                 |
| DW64-B  | \$3031     | 296           | BR     | 2           | B      | 18.5    | 65" x 26 1/2" x 33 3/4"       | 1651 x 673 x 857                   | 115   | 6.3  | 1/3 | 4                 |
| DW79-B  | \$3890     | 379           | BR     | 3           | B      | 23.2    | 80" x 26 1/2" x 33 3/4"       | 2032 x 673 x 857                   | 115   | 9.5  | 1/2 | 5                 |
| DW94-B  | \$4210     | 425           | BR     | 4           | B      | 28.5    | 95" x 26 1/2" x 33 3/4"       | 2413 x 673 x 857                   | 115   | 9.5  | 1/2 | 6                 |
| DW49-S  | \$3232     | 264           | BR     | 2           | S/S    | 13.3    | 50" x 26 1/2" x 33 3/4"       | 1270 x 673 x 857                   | 115   | 6.3  | 1/3 | 3                 |
| DW64-S  | \$3596     | 308           | BR     | 2           | S/S    | 18.5    | 65" x 26 1/2" x 33 3/4"       | 1651 x 673 x 857                   | 115   | 6.3  | 1/3 | 4                 |
| DW79-S  | \$4645     | 373           | BR     | 3           | S/S    | 23.2    | 80" x 26 1/2" x 33 3/4"       | 2032 x 673 x 857                   | 115   | 9.5  | 1/2 | 5                 |
| DW94-S  | \$4866     | 425           | BR     | 4           | S/S    | 28.5    | 95" x 26 1/2" x 33 3/4"       | 2413 x 673 x 857                   | 115   | 9.5  | 1/2 | 6                 |
| SF34-B  | \$2555     | 200           | BR     | 1           | B      | 6.8     | 35" x 26 1/2" x 33 3/4"       | 889 x 673 x 857                    | 115   | 4.5  | 1/5 | 2                 |
| GF24L-B | \$3163     | 186           | BR     | 1           | B      | 4.4     | 24" x 26" x 33 3/4"           | 610 x 660 x 857                    | 115   | 6.5  | 1/3 | 2                 |
| GF34L-B | \$3505     | 212           | BR     | 1           | B      | 6.6     | 34" x 26" x 33 3/4"           | 864 x 660 x 857                    | 115   | 6.5  | 1/3 | 2                 |
| GF48L-B | \$3745     | 280           | BR     | 2           | B      | 9.6     | 48" x 26" x 33 3/4"           | 1219 x 660 x 857                   | 115   | 7.5  | 1/3 | 4                 |

Export voltages available

BR= Brookville, PA

| CAPACITIES |                              |                               |
|------------|------------------------------|-------------------------------|
| DW49       | 17 1/2 cases<br>23 3/4 cases | 12 oz. bottles<br>12 oz. cans |
| DW64       | 25 1/4 cases<br>34 3/4 cases | 12 oz. bottles<br>12 oz. cans |
| DW79       | 32 cases<br>45 3/4 cases     | 12 oz. bottles<br>12 oz. cans |
| DW94       | 39 cases<br>55 3/4 cases     | 12 oz. bottles<br>12 oz. cans |



Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.

- Durable black steel exterior, standard.
- Stainless steel top, easy glide lids and counter top with edge.
- Stainless steel front available.
- Foamed-in-place polyurethane insulation for energy efficiency.
- Balanced refrigeration system provides rapid chilling of product.
- Glass Frosters chill mugs and plates to minus 10°F, producing frost when removed.
- Adjustable epoxy coated dividers, Bottle Coolers.
- Deep wells feature adjustable epoxy coated shelves.
- Bottle cap opener and cap catcher optional on DW/SF models.
- Bottle cooler glass lids with interior lights, available.
- Refrigeration system utilizes ozone friendly R134a refrigerant.
- Glass Froster system utilizes ozone friendly R404A refrigerant.
- Optional casters, legs and lid locks available.



## BOTTLE COOLERS AND GLASS FROSTERS

## BACK BAR

## SOLID DOOR REFRIGERATORS

| MODEL     | LIST PRICE | CRATED WEIGHT | F.O.B. | DOORS | FINISH | CU.FT. | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | VOLTS | AMPS | HP  | SHELVES | NUMBER KEG SW |
|-----------|------------|---------------|--------|-------|--------|--------|-------------------------------|------------------------------------|-------|------|-----|---------|---------------|
| BB48-B    | \$4001     | 245           | BR     | 2     | B      | 12.4   | 48"x 23"x 34"                 | 1219 x 584 x 864                   | 115   | 6.8  | 1/4 | 4       | 2             |
| BB48-B-27 | \$4384     | 260           | BR     | 2     | B      | 12.4   | 48"x 23"x 36"                 | 1219 x 584 x 864                   | 115   | 6.8  | 1/4 | 4       | 2             |
| BB48R-B   | \$2940     | 205           | BR     | 2     | B      | 12.4   | 48"x 23"x 34"                 | 1219 x 584 x 864                   | 115   | 0.5  | -   | 4       | 2             |
| BB58-1-B  | \$3955     | 315           | BR     | 2     | B      | 23.7   | 59"x 27"x 37 1/4"             | 1499 x 686 x 946                   | 115   | 7.2  | 1/3 | 4       | 2             |
| BB58R-B   | \$3147     | 284           | BR     | 2     | B      | 24.6   | 59"x 27"x 37 1/4"             | 1499 x 686 x 946                   | 115   | 0.5  | -   | 4       | 3             |
| BB68-1-B  | \$4087     | 372           | BR     | 2     | B      | 28.0   | 69"x 27"x 37 1/4"             | 1753 x 686 x 946                   | 115   | 7.2  | 1/3 | 4       | 3             |
| BB72-B    | \$4750     | 326           | BR     | 3     | B      | 20.6   | 72"x 23"x 34"                 | 1829 x 584 x 864                   | 115   | 7.3  | 1/4 | 6       | 3             |
| BB72-B-27 | \$5524     | 344           | BR     | 3     | B      | 20.6   | 72"x 23"x 36"                 | 1829 x 584 x 864                   | 115   | 7.3  | 1/4 | 6       | 3             |
| BB72R-B   | \$3421     | 316           | BR     | 3     | B      | 20.6   | 72"x 23"x 34"                 | 1829 x 584 x 864                   | 115   | 0.5  | -   | 6       | 3             |
| BB78-1-B  | \$4460     | 405           | BR     | 3     | B      | 33.3   | 79"x 27"x 37 1/4"             | 2007 x 686 x 946                   | 115   | 7.2  | 1/3 | 6       | 4             |
| BB78E-B   | \$4508     | 420           | BR     | 3     | B      | 34.2   | 92 1/2"x 27"x 37 1/4"         | 2350 x 686 x 946                   | 115   | 7.2  | 1/3 | 6       | 5             |
| BB78R-B   | \$3700     | 383           | BR     | 3     | B      | 33.3   | 79"x 27"x 37 1/4"             | 2007 x 686 x 946                   | 115   | 0.5  | -   | 6       | 5             |
| BB94-1-B  | \$4854     | 465           | BR     | 3     | B      | 39.2   | 95"x 27"x 37 1/4"             | 2413 x 686 x 946                   | 115   | 7.2  | 1/3 | 6       | 5             |

Export voltages available

\* -27 models denotes stainless steel tops

BR= Brookville, PA

## STANDARD WITH LOCKS

## FIELD REVERSIBLE DOORS



Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.

## OPTIONAL ACCESSORIES ON PAGE 8I



- Durable black steel exterior, standard.
- Shallow depth 23" Back Bar models supplied with galvanized sub top. Two inch stainless steel top optional.
- Back Bar 27" depth models equipped with two inch stainless steel top.
- Stainless steel front and sides available.
- Stainless steel floor and reinforced door breakers, standard.
- Self-closing doors with locks and interior light.
- Doors field reversible with hinge kit accessory.
- Deep and shallow depth models accommodate straight wall beer kegs.
- Balanced refrigeration system designed for rapid chilling of product.
- Shallow depth models equipped with lift-out refrigeration systems.
- Refrigeration system utilizes ozone friendly R134a refrigerant.
- Remote refrigeration models include expansion valve installed.
- Optional accessories available.
- 2" Stainless Steel Top option on BB48 & 72.

| MODEL      | LIST PRICE | CRATED WEIGHT | F.O.B. | DOORS | FINISH | CU.FT. | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | VOLTS | AMPS | HP  | SHELVES | NUMBER KEG SW |
|------------|------------|---------------|--------|-------|--------|--------|-------------------------------|------------------------------------|-------|------|-----|---------|---------------|
| BB48G-B    | \$4573     | 245           | BR     | 2     | B      | 12.4   | 48"x 23"x 34"                 | 1219 x 584 x 864                   | 115   | 6.8  | 1/4 | 4       | 2             |
| BB48G-B-27 | \$5217     | 263           | BR     | 2     | B      | 12.4   | 48"x 23"x 36"                 | 1219 x 584 x 864                   | 115   | 6.8  | 1/4 | 4       | 2             |
| BB58G-1-B  | \$4713     | 315           | BR     | 2     | B      | 23.7   | 59"x 27"x 37 1/4"             | 1499 x 686 x 946                   | 115   | 7.2  | 1/3 | 4       |               |
| BB68G-1-B  | \$4846     | 372           | BR     | 2     | B      | 28.0   | 69"x 27"x 37 1/4"             | 1753 x 686 x 946                   | 115   | 7.2  | 1/3 | 4       | 3             |
| BB72G-B    | \$5473     | 374           | BR     | 3     | B      | 20.6   | 72"x 23"x 34"                 | 1829 x 584 x 864                   | 115   | 7.3  | 1/4 | 6       | 3             |
| BB72G-B-27 | \$6247     | 386           | BR     | 3     | B      | 20.6   | 72"x 23"x 36"                 | 1829 x 584 x 864                   | 115   | 7.3  | 1/4 | 6       | 3             |
| BB78G-1-B  | \$5217     | 405           | BR     | 3     | B      | 33.3   | 79"x 27"x 37 1/4"             | 2007 x 584 x 864                   | 115   | 7.3  | 1/3 | 6       | 4             |
| BB94G-1-B  | \$5992     | 465           | BR     | 3     | B      | 39.2   | 95"x 27"x 37 1/4"             | 2413 x 584 x 864                   | 115   | 7.3  | 1/3 | 6       | 5             |

Export voltages available

\* -27 models denotes stainless steel tops

BR= Brookville, PA

### IMPROVED LIGHTING FOR GREATER MERCHANDISING

### GLASS DOORS PROVIDE GREATER MARKETING POTENTIAL

- Durable black steel exterior, standard.
- Shallow depth 23" back bar models supplied with galvanized sub top. Two inch stainless steel top optional.
- Back Bar 27" depth models equipped with two inch stainless steel top.
- Stainless steel front and sides available.
- Stainless steel floor and reinforced door breakers, standard.
- Self-closing doors with locks and interior light.
- Deep and shallow depth models accommodate straight wall beer kegs.
- Balanced refrigeration system designed for rapid chilling of product.
- Shallow depth models equipped with lift-out refrigeration systems.
- Refrigeration system utilizes ozone friendly R134a refrigerant.
- Remote refrigeration models include expansion valve installed.
- Optional accessories available.
- 2" Stainless Steel Top option on BB 48 & 72.



BAR EQUIPMENT

## GLASS DOOR REFRIGERATORS

## DIRECT DRAW

## BEER REFRIGERATORS AND BAR MOBILES

| MODEL    | LIST PRICE | CRATED WEIGHT | F.O.B. | DOORS | FINISH | CU.FT. | OVERALL EXT. INCHES<br>W x D x H | OVERALL EXT. METRIC (MM)<br>W x D x H | VOLTS | AMPS | HP  | SHELVES            | NUMBER KEG SW |
|----------|------------|---------------|--------|-------|--------|--------|----------------------------------|---------------------------------------|-------|------|-----|--------------------|---------------|
| BM23-B   | \$2463     | 167           | BR     | 1     | B      | 7.8    | 24" x 28" x 37 1/2"              | 610 x 711 x 953                       | 115   | 4.0  | 1/5 | 1                  | 1             |
| BM23C-B  | \$2901     | 171           | BR     | 1     | B      | 7.8    | 24" x 28" x 39"                  | 610 x 711 x 991                       | 115   | 4.0  | 1/5 | 1                  | 1             |
| DD48-B   | \$4336     | 245           | BR     | 2     | B      | 12.4   | 48" x 23" x 36"                  | 1219 x 584 x 864                      | 115   | 6.8  | 1/4 | -                  | 2             |
| DD50-1-B | \$4072     | 286           | BR     | 2     | B      | 19.8   | 50 1/2" x 28 1/8" x 37 1/4"      | 1283 x 714 x 946                      | 115   | 7.2  | 1/3 | -                  | 2             |
| DD50C-B  | \$4723     | 304           | BR     | 2     | B      | 19.8   | 50 1/2" x 28 1/8" x 38 3/4"      | 1283 x 714 x 984                      | 115   | 7.2  | 1/3 | 1                  | 2             |
| DD58C-B  | \$4893     | 329           | BR     | 2     | B      | 23.7   | 59" x 28 1/8" x 38 3/4"          | 1499 x 714 x 984                      | 115   | 7.2  | 1/3 | 2                  | 3             |
| DD72-B   | \$5137     | 326           | BR     | 3     | B      | 20.6   | 72" x 23" x 36"                  | 1829 x 584 x 864                      | 115   | 7.3  | 1/4 | BR= Brookville, PA | 3             |

Export voltages available

## THE DD48 HOLDS TWO WALL KEGS WITH LESS FLOOR SPACE



Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.

## DISPENSES THE COLDEST BEER EVERY TIME



- Durable black steel exteriors, standard.
- Stainless steel tops with drain line and drip trays are standard.
- Stainless steel floor and reinforced door breakers, standard.
- Optional stainless steel exterior, available.
- Direct draw models are equipped with 3" insulated dispensing columns; excluding the BM23C.
- Dispensing columns have continuous cold air channeled through to ensure cold product.
- Self-closing doors with locks and interior light.
- Doors field reversible with hinge kit accessory.
- Optional club top provides top access to interior.
- Balanced refrigeration system designed to operate 36-38°F.
- Refrigeration system utilizes ozone friendly R134a refrigerant.
- Remote refrigeration models include expansion valve installed.
- Optional accessories available.

## BEER REFRIGERATORS AND BAR MOBILES



| MODEL     | LIST PRICE | CRATED WEIGHT | F.O.B. | DOORS | FINISH | CU.FT. | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | VOLTS | AMPS | HP  | SHELVES | NUMBER KEG SW |
|-----------|------------|---------------|--------|-------|--------|--------|-------------------------------|------------------------------------|-------|------|-----|---------|---------------|
| DD58R-1-B | \$4077     | 266           | BR     | 2     | B      | 24.6   | 59" x 28 1/8" x 37 1/4"       | 1499 x 714 x 946                   | 115   | 0.5  | -   | -       | 3             |
| DD58-1-B  | \$4208     | 302           | BR     | 2     | B      | 23.7   | 59" x 28 1/8" x 37 1/4"       | 1499 x 714 x 946                   | 115   | 7.2  | 1/3 | -       | 3             |
| DD68-1-B  | \$4377     | 364           | BR     | 2     | B      | 28     | 69" x 28 1/8" x 37 1/4"       | 1753 x 714 x 946                   | 115   | 7.2  | 1/3 | -       | 3             |
| DD68C-B   | \$5160     | 382           | BR     | 2     | B      | 28     | 69" x 28 1/8" x 38 3/4"       | 1753 x 714 x 984                   | 115   | 7.2  | 1/3 | 2       | 3             |
| DD78-1-B  | \$5300     | 400           | BR     | 3     | B      | 32.3   | 79" x 28 1/8" x 37 1/4"       | 2007 x 714 x 946                   | 115   | 7.2  | 1/3 | -       | 4             |
| DD78E-1-B | \$5380     | 420           | BR     | 3     | B      | 34.2   | 92 1/2" x 28 1/8" x 37 1/4"   | 2350 x 714 x 946                   | 115   | 7.2  | 1/3 | -       | 5             |
| DD78R-1-B | \$4536     | 335           | BR     | 3     | B      | 3.3    | 79" x 28 1/8" x 37 1/4"       | 2007 x 714 x 946                   | 115   | 0.5  | -   | -       | 5             |
| DD94-1-B  | \$5434     | 426           | BR     | 3     | B      | 39.2   | 95" x 28 1/8" x 37 1/4"       | 2413 x 714 x 946                   | 115   | 7.2  | 1/3 | -       | 5             |

Export voltages available

BR= Brookville, PA



Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.

- Durable black steel exteriors, standard.
- Stainless steel tops with drain line and drip trays are standard.
- Stainless steel floor and reinforced door breakers, standard.
- Optional stainless steel exterior, available.
- Direct draw models are equipped with 3" insulated dispensing columns
- Dispensing columns have continuous cold air channeled through to ensure cold product.
- Self-closing doors with locks and interior light.
- Doors field reversible with hinge kit accessory.
- Optional club top provides top access to interior.
- Balanced refrigeration system designed to operate 36-38°F.
- Refrigeration system utilizes ozone friendly R134a refrigerant.
- Remote refrigeration models include expansion valve installed.
- Optional accessories available.



## WINE CAVES

## GLASS DOOR

| MODEL        | LIST PRICE | CRATED WEIGHT | F.O.B. | DOORS | FINISH   | CU. FT. | OVERALL EXT. INCHES<br>W x D x H | OVERALL EXT. METRIC (MM)<br>W x D x H | VOLTS | AMPS | HP   | SHELVES | BOTTLE CAPACITY |
|--------------|------------|---------------|--------|-------|----------|---------|----------------------------------|---------------------------------------|-------|------|------|---------|-----------------|
| CAV185G-80   | \$2457     | 110           | SP     | 1     | Bordeaux | 6.2     | 23 3/5" x 24 4/5" x 33 1/2"      | 600 x 630 x 850                       | 115   | 1.95 | 1/10 | 2       | 80              |
| CAV185GL-80  | \$2920     | 110           | SP     | 1     | Bordeaux | 6.2     | 23 3/5" x 24 4/5" x 33 1/2"      | 600 x 630 x 850                       | 115   | 1.95 | 1/10 | 2       | 80              |
| CAV290G-120  | \$2958     | 148           | SP     | 1     | Bordeaux | 9.5     | 23 3/5" x 24 4/5" x 49 1/5"      | 600 x 630 x 1250                      | 115   | 1.95 | 1/10 | 4       | 120             |
| CAV290GL-120 | \$3629     | 148           | SP     | 1     | Bordeaux | 9.5     | 23 3/5" x 24 4/5" x 49 1/5"      | 600 x 630 x 1250                      | 115   | 1.95 | 1/10 | 4       | 120             |
| CAV370G-180  | \$3134     | 165           | SP     | 1     | Bordeaux | 12.2    | 27 3/5" x 26 2/5" x 49 1/5"      | 700 x 670 x 1250                      | 115   | 3.01 | 1/5  | 4       | 180             |
| CAV370GL-180 | \$3770     | 165           | SP     | 1     | Bordeaux | 12.2    | 27 3/5" x 26 2/5" x 49 1/5"      | 700 x 670 x 1250                      | 115   | 3.01 | 1/5  | 4       | 180             |
| CAV500G-260  | \$3764     | 181           | SP     | 1     | Bordeaux | 15.5    | 27 3/5" x 26 2/5" x 61 2/5"      | 700 x 670 x 1560                      | 115   | 3.01 | 1/5  | 5       | 260             |
| CAV500GL-260 | \$4443     | 181           | SP     | 1     | Bordeaux | 15.5    | 27 3/5" x 26 2/5" x 61 2/5"      | 700 x 670 x 1560                      | 115   | 3.01 | 1/5  | 5       | 260             |

Export voltages available

For total depth add 1" for handle

SP=Spartanburg

BR= Brookville, PA

\*GL Models include locks and internal lighting

\*Bottle capacity subject to change based on type of bottle being stored

TRANSITION FROM SPARTANBURG DISTRIBUTION CENTER TO BROOKVILLE DISTRIBUTION IN 2006  
CONTACT FACTORY FOR WAREHOUSE LOCATION.

FOR THE PERFECT TASTE.

DISPLAY YOUR SELECTION AT THE RESTAURANT, AND DISCOVER THE  
DIFFERENCE IT CAN MAKE TO BEVERAGE ORDERS. AS YOU KNOW, THE  
FINEST WINES ALSO INCITE THE ULTIMATE TASTE EXPERIENCES.



REAR BREATHING

- Thermostatically controlled temperature, fully automatic defrost and evaporation.
- Controlled hygrometry with 60–75% humidity.
- Active carbon filter purifies air through natural ventilation.
- Easy-to-clean inner lining.
- Flexible shelves make the cabinets very spacious.
- Wire shelves with wood front are standard.
- Panoramic glass door with protection against ultraviolet rays.
- Door hinges are interchangeable: door opens to the left or right.
- GL Models include locks and internal lighting.

- Used for storage of non-potentially hazardous beverages.

WINE CAVES



Turn to the Experts.™



MILK AND ICE CREAM



## MILK AND ICE CREAM EQUIPMENT

MERGING THE CONCEPTS OF SAFETY AND RELIABILITY TO MEET ALL OF YOUR INSTITUTIONAL FOOD SERVICE NEEDS. OUR COMPLETE LINE OF MILK COOLERS PROVIDE EFFICIENT OPERATION AND ASSURE COLD MILK EVERYTIME. BEVERAGE-AIR® MILK COOLERS - THE MOST FREQUENTLY SPECIFIED MILK COOLER LINE IN THE INDUSTRY!



# MILK COOLERS

DUAL ACCESS FORCED-AIR

| MODEL WHITE | LIST WHITE | MODEL S/S | LIST S/S | CRATED WEIGHT | F.O.B. | ACCESS | FINISH | CASE CAPACITY | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | VOLTS | AMPS | HP  |
|-------------|------------|-----------|----------|---------------|--------|--------|--------|---------------|-------------------------------|------------------------------------|-------|------|-----|
| STF49-1-W   | \$6153     | STF49-1-S | \$6398   | 417           | BR     | Dual   | W-S/S  | 12            | 49"x 33 1/2"x 48"             | 1245 x 851 x 1219                  | 115   | 8.2  | 1/2 |
| STF58-1-W   | \$6374     | STF58-1-S | \$6620   | 463           | BR     | Dual   | W-S/S  | 16            | 58"x 33 1/2"x 48"             | 1473 x 851 x 1219                  | 115   | 8.2  | 1/2 |

Export voltages available

BR= Brookville, PA



Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.

MILK AND ICE CREAM EQUIPMENT

THE ULTIMATE IN COLD MILK AND SELF SERVICE



STAINLESS STEEL EXTERIOR

WHITE EXTERIOR

MODEL SHOW WITH OPTIONAL "COW SPOT" GRAPHICS  
CONTACT FACTORY FOR PRICING AND AVAILABILITY

"got milk?®"

DECALS ALSO AVAILABLE.

CONTACT FACTORY FOR PRICING AND AVAILABILITY

OPTIONAL ACCESSORIES ON PAGE 81

- Standard cabinet exterior is constructed of heavy duty white coated steel and includes stainless steel lid, door with lock, hinges and latch.
- Cabinet interior is galvanized steel with heavy-duty epoxy coated floor rack, standard.
- Stainless steel interior and exterior models available.
- White exterior models available with stainless steel interior.
- Foamed-in-place CFC free polyurethane insulation for added cabinet strength and energy savings.
- Digital thermometer for easy display of interior temperature.
- Five inch swivel casters, two with brakes are standard.
- Floor drain is centrally located for easy cleaning, connecting to drain hose with hose adapter.
- Refrigeration system utilizes ozone friendly R134a refrigerant.
- Optional bumper guards, legs and accessories available.
- One piece removable racks.
- 300 Series stainless steel liner bottoms on all units.

## SCHOOL MILK DUAL ACCESS

"got milk?" is a registered trademark of the California Milk Processor Board.





## MILK COOLERS

FORCED-AIR



| MODEL WHITE | LIST WHITE | MODEL S/S | LIST S/S | CRATED WEIGHT | F.O.B. | ACCESS | FINISH | CASE CAPACITY | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | VOLTS | AMPS | HP  |
|-------------|------------|-----------|----------|---------------|--------|--------|--------|---------------|-------------------------------|------------------------------------|-------|------|-----|
| SMF34-W     | \$3500     | SMF34-S   | \$4055   | 320           | BR     | Single | W-S/S  | 8             | 34"x 33 1/2"x 47"             | 864 x 851 x 1194                   | 115   | 7.4  | 1/3 |
| SMF49-W     | \$4048     | SMF49-S   | \$4680   | 407           | BR     | Single | W-S/S  | 12            | 49"x 33 1/2"x 47"             | 1245 x 851 x 1194                  | 115   | 8.2  | 1/2 |
| SMF58-W     | \$4389     | SMF58-S   | \$5035   | 453           | BR     | Single | W-S/S  | 16            | 58"x 33 1/2"x 47"             | 1473 x 851 x 1194                  | 115   | 8.2  | 1/2 |

Export voltages available

BR= Brookville, PA

MERGING THE CONCEPTS OF SAFETY AND RELIABILITY  
TO MEET ALL OF YOUR INSTITUTIONAL NEEDS

- Beverage-Air's patented† forced air milk coolers are designed to maintain continuous milk temperature at or below 38°F during extended use periods in excess of 2 hours with lid and drop door open.
- Standard cabinet exterior is constructed of heavy duty white coated steel and includes stainless steel lid, door with lock, hinges and latch.
- Cabinet interior is galvanized steel with heavy-duty epoxy coated floor rack, standard.
- Stainless steel interior and exterior models available.
- White exterior models available with stainless steel interior.
- Foamed-in-place CFC free polyurethane insulation for added cabinet strength and energy savings.
- Digital thermometer for easy display of interior temperature.
- Seven inch swivel casters, two with brakes are standard.
- Floor drain is centrally located for easy cleaning, connecting to drain hose with hose adapter.
- Refrigeration system utilizes ozone friendly R134a refrigerant.
- Optional bumper guards, legs and accessories available.



MILK AND ICE CREAM EQUIPMENT

## SCHOOL MILK COOLERS



## MILK COOLERS

## COLD WALL

| MODEL WHITE | LIST WHITE | MODEL S/S | LIST S/S | CRATED WEIGHT | F.O.B. | ACCESS | FINISH | CASE CAPACITY | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | VOLTS | AMPS | HP  |
|-------------|------------|-----------|----------|---------------|--------|--------|--------|---------------|-------------------------------|------------------------------------|-------|------|-----|
| SM34N-W     | \$3019     | SM34N-S   | \$3626   | 237           | BR     | Single | W-S/S  | 8             | 34 1/2"x 31"x 39 1/2"         | 876 x 787 x 1003                   | 115   | 4.6  | 1/4 |
| SM49N-W     | \$3420     | SM49N-S   | \$4136   | 307           | BR     | Single | W-S/S  | 12            | 49 1/2"x 31"x 39 1/2"         | 1257 x 787 x 1003                  | 115   | 4.6  | 1/3 |
| SM58N-W     | \$3814     | SM58N-S   | \$4968   | 345           | BR     | Single | W-S/S  | 16            | 58 1/2"x 31"x 39 1/2"         | 1486 x 787 x 1003                  | 115   | 7.5  | 1/3 |
| ST34N-W     | \$3720     | ST34N-S   | \$4320   | 240           | BR     | Dual   | W-S/S  | 8             | 34 1/2"x 31 1/2"x 39 1/2"     | 876 x 800 x 1003                   | 115   | 4.6  | 1/4 |
| ST49N-W     | \$4170     | ST49N-S   | \$4864   | 291           | BR     | Dual   | W-S/S  | 12            | 49 1/2"x 31 1/2"x 39 1/2"     | 1257 x 800 x 1003                  | 115   | 7.5  | 1/3 |
| ST58N-W     | \$4522     | ST58N-S   | \$5370   | 338           | BR     | Dual   | W-S/S  | 16            | 58 1/2"x 31 1/2"x 39 1/2"     | 1486 x 800 x 1003                  | 115   | 7.5  | 1/3 |



ASK ABOUT ENERGY STAR Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.

OPTIONAL ACCESSORIES ON PAGE 81

THE MOST SPECIFIED MILK COOLER  
IN THE INDUSTRY



- Most widely used and recognized self-service milk coolers in the industry.
- Cold wall refrigeration system designed to hold milk carton cases between 36-38°F.
- Available in single (SM) and dual access (ST) models to suit application.
- Standard cabinet exterior is constructed of heavy-duty white coated steel and includes stainless steel lid, door with lock, hinges and latch.
- Cabinet interior is galvanized steel with heavy-duty epoxy coated floor rack, standard.
- Stainless steel interior and exterior models available.
- White exterior models available with stainless steel interior. (See accessories page 81)
- Foamed-in-place CFC free polyurethane insulation for added cabinet strength and energy savings.
- Dial thermometer on cabinet front to display interior temperature.
- Four inch swivel casters, two with brakes are standard.
- Floor drain is centrally located for easy cleaning, connecting to drain hose with hose adapter.
- Refrigeration system utilizes ozone friendly R404A refrigerant.
- Low temperature models, operate at 0°F for the temporary storage of ice cream available. Contact factory for pricing and availability.
- Optional bumper guards, legs and accessories available.

SCHOOL MILK AND DUAL ACCESS COOLERS

## STORAGE

### MIX AND BULK MILK



| MODEL    | DESCRIPTION                | DIMENSIONS (Exterior) |         |         | VOLTS | AMPS | HP  | CU. FT. | SHIP WT. | F.O.B | LIST PRICE |
|----------|----------------------------|-----------------------|---------|---------|-------|------|-----|---------|----------|-------|------------|
|          |                            | LENGTH                | DEPTH   | HEIGHT  |       |      |     |         |          |       |            |
| MS58-1-W | 2 Door Milk Storage, White | 59"                   | 28 3/4" | 37 1/4" | 115   | 7.0  | 1/3 | 23.7    | 299      | BR    | \$4579     |
| MS68-1-W | 2 Door Milk Storage, White | 69"                   | 28 3/4" | 37 1/4" | 115   | 7.0  | 1/3 | 23.7    | 329      | BR    | \$4882     |
| MS58-1-S | 2 Door Milk Storage, S/S   | 59"                   | 28 3/4" | 37 1/4" | 115   | 7.0  | 1/3 | 23.7    | 299      | BR    | \$4874     |
| MS68-1-S | 2 Door Milk Storage, S/S   | 69"                   | 28 3/4" | 37 1/4" | 115   | 7.0  | 1/3 | 23.7    | 329      | BR    | \$5177     |

BR= Brookville, PA

#### Syrup Rails & Accessories for MS58 & MS68

Syrup Rail Housing for 9 Jars  
 Syrup Rail Housing for 6 Jars  
 Syrup Rail Housing for 3 Jars  
 Syrup Pump for above  
 Chocolate Pump for above  
 Jar - 3 1/2 Quart Syrup or Chocolate for above  
 Jar - 2 1/2 Quart Crushed Fruit for above  
 Cover - Fruit Jar for above  
 Inserts - Fruit Jar - 6 Inserts Standard  
 Jar - 40 oz. Crushed Fruit

#### IDEAL FOR STORING MIX AND BULK MILK



- Available in 58" and 68" width.
- Ideal for storing milk and bulk milk.
- Three sizes of syrup rails available.
- Fruit jar inserts.
- Heavy Duty stainless steel top.
- Foamed in-place polyurethane insulation.
- Heavy duty interior bottom.
- MS58 and MS68 available in stainless steel.

MILK AND ICE CREAM EQUIPMENT

## MIX AND BULK MILK STORAGE



## BUNKERS

## IMPULSE MERCHANDISERS

| PART NUMBER | MODEL | DESCRIPTION                        | LENGTH | DEPTH   | HEIGHT  | AMPS | CU. FT. | SHIP WT. | F.O.B | LIST PRICE |
|-------------|-------|------------------------------------|--------|---------|---------|------|---------|----------|-------|------------|
| 45-0200-05  | B5    | Flat Top Spot Merchandiser Freezer | 28"    | 22 1/2" | 36 1/2" | 5.0  | 5.0     | 130      | SP    | \$1667     |
| 45-0200-07  | B7    | Flat Top Spot Merchandiser Freezer | 36"    | 22 1/2" | 36 1/2" | 5.0  | 7.2     | 150      | SP    | \$1734     |
| 45-0200-09  | B9    | Flat Top Spot Merchandiser Freezer | 42"    | 22 1/2" | 36 1/2" | 5.0  | 8.8     | 165      | SP    | \$2000     |

SP=Spartanburg, SC

BR= Brookville, PA

TRANSITION FROM SPARTANBURG DISTRIBUTION CENTER TO BROOKVILLE  
DISTRIBUTION CENTER IN 2006 CONTACT FACTORY FOR WAREHOUSE LOCATION.

## IDEAL FOR MERCHANDISING IMPULSE ITEMS



- Whisper quiet operation.
- Steel refrigerant tubing.
- Exterior is textured white finish.
- Heavy duty casters.
- One basket stack standard per cabinet.
- Heavy duty top with lockable glass lids.
- Manual defrost, front mounted drain with plug.
- 0° to -15°F temperature range.
- Environmentally friendly R-134a refrigerant.
- Reliable capillary tube refrigerant control.
- Supplied with 15A power cord with NEMA 5-15P plug.

OPTIONAL ACCESSORIES ON PAGE 81

## BUNKERS



| PART NUMBER | MODEL | DESCRIPTION                        | LENGTH  | DEPTH   | HEIGHT    | AMPS | CU. FT. | SHIP WT. | F.O.B. | LIST PRICE |
|-------------|-------|------------------------------------|---------|---------|-----------|------|---------|----------|--------|------------|
| 45-0200-13  | B13   | Flat Top Spot Merchandiser Freezer | 43 3/4" | 28 3/4" | 36 45/64" | 5.0  | 12.8    | 175      | SP     | \$2309     |
| 45-0200-15  | B15   | Flat Top Spot Merchandiser Freezer | 49"     | 28 3/4" | 36 45/64" | 5.0  | 14.8    | 180      | SP     | \$2555     |
| 45-0200-18  | B18   | Flat Top Spot Merchandiser Freezer | 56 3/4" | 28 3/4" | 36 45/64" | 5.0  | 17.8    | 195      | SP     | \$2621     |

SP=Spartanburg, SC

BR= Brookville, PA

TRANSITION FROM SPARTANBURG DISTRIBUTION CENTER TO BROOKVILLE  
DISTRIBUTION CENTER IN 2006 CONTACT FACTORY FOR WAREHOUSE LOCATION.

### IDEAL FOR MERCHANDISING IMPULSE ITEMS

- Whisper quiet operation.
- Steel refrigerant tubing.
- Exterior is textured white finish.
- Heavy duty casters.
- One basket stack standard per cabinet.
- Heavy duty top with lockable glass lids.
- Manual defrost, front mounted drain with plug.
- 0° to -15°F temperature range.
- Environmentally friendly R-134a refrigerant.
- Reliable capillary tube refrigerant control.
- Supplied with 15A power cord with NEMA 5-15P plug.

OPTIONAL ACCESSORIES ON PAGE 81



MILK AND ICE CREAM EQUIPMENT



## BUNKERS

## SLANT TOP

| PART NUMBER | MODEL  | DESCRIPTION                      | BASKET | LENGTH  | DEPTH   | HEIGHT  | AMPS | CU. FT. | SHIP WT. | F.O.B. | LIST PRICE |
|-------------|--------|----------------------------------|--------|---------|---------|---------|------|---------|----------|--------|------------|
| 45-0235-00  | BCS-41 | Slanted Top Merchandiser Freezer | 4      | 41 3/4" | 25 5/8" | 41 7/8" | 6.8  | 10.8    | 183      | SP     | \$2849     |
| 45-0236-00  | BCS-51 | Slanted Top Merchandiser Freezer | 5      | 51 3/8" | 25 5/8" | 41 7/8" | 6.18 | 14      | 207      | SP     | \$3163     |
| 45-0237-00  | BCS-67 | Slanted Top Merchandiser Freezer | 6      | 67 3/4" | 24"     | 35 1/8" | 4.9  | 19.3    | 220      | SP     | \$3466     |

SP=Spartanburg, SC

BR= Brookville, PA

TRANSITION FROM SPARTANBURG DISTRIBUTION CENTER TO BROOKVILLE  
DISTRIBUTION CENTER IN 2006 CONTACT FACTORY FOR WAREHOUSE LOCATION.

INCLUDES FULL COMPLIMENT OF  
BASKETS

EURO-STYLING IN  
IMPULSE MERCHANDISING

INCLUDES FACTORY  
INSTALLED LID LOCKS

- Curved glass lids with locks and brush style gaskets.
- Heavy duty metal interior and exterior is more dent resistant.
- Copper evaporator coil wraps around the tank for better heat transfer. Bare tube condenser for maintenance free operation.
- Durable powder-paint finish.
- Beveled style extrusion on the top.
- Manual defrost, bottom mounted drain with plug.
- Standard with full set of baskets and casters.
- Heavy steel skids to support cabinet on casters.
- Slide out compressor tray for easy serviceability.
- Thermostat control allows pull down to -18°F.
- Environmentally friendly R-134a refrigerant.
- Reliable capillary tube refrigerant control.
- Supplied with power cord.



BCS-41



BCS-51



BCS-67

MODELS SHOWN WITH OPTIONAL LIGHT.

BUNKERS





Turn to the Experts.™



MERCHANDISERS

## GLASS DOOR MERCHANDISERS

DRIVE BEVERAGE AND PREPACKAGED FOOD SALES. ENHANCE PROFITS. BEVERAGE-AIR® OFFERS A WIDE VARIETY OF GLASS DOOR MERCHANDISERS THAT WILL FIT PERFECTLY IN VIRTUALLY ANY LOCATION. YOU WILL NOT FIND A MORE CLEANER, ATTRACTIVE LOOK.

## HINGED GLASS DOOR

MARKETEERS®

| MODEL BLACK | MODEL WHITE | LIST PRICE | CRATED WEIGHT | F.O.B. | DOORS | FINISH | CU.FT. | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | VOLTS | AMPS | HP  | SHELVES |
|-------------|-------------|------------|---------------|--------|-------|--------|--------|-------------------------------|------------------------------------|-------|------|-----|---------|
| MT10-1-B    | MT10-1-W    | \$2371     | 220           | SP     | 1     | W-B    | 10     | 24" x 24" x 54"               | 610 x 610 x 1372                   | 115   | 6.5  | 1/5 | 3       |
| MT12-1-B    | MT12-1-W    | \$2407     | 230           | SP     | 1     | W-B    | 12     | 24"x 23 3/4"x 62 1/2"         | 610 x 603 x 1588                   | 115   | 6.5  | 1/5 | 4       |
| NA          | MT21-1W     | \$3213     | 280           | SP     | 1     | W-B    | 18.3   | 26 3/4" x 27" x 77 3/8"       | 680 x 686 x 1965                   | 115   | 6.7  | 1/3 | 4       |
| MT27-B-55   | MT27-W-55   | \$3034     | 377           | SP     | 1     | W-B    | 27     | 30"x 31 3/4"x 78"             | 762 x 807 x 1981                   | 115   | 8.5  | 1/3 | 4       |
| MT49-B-55   | MT49-W-55   | \$5316     | 562           | SP     | 2     | W-B    | 49     | 52"x 31 3/4"x 78"             | 1321 x 807 x 1981                  | 115   | 10.5 | 1/2 | 10      |
| MT72-B-55   | MT72-W-55   | \$6986     | 739           | SP     | 3     | W-B    | 72     | 75"x 31 3/4"x 78"             | 1905 x 807 x 1981                  | 115   | 12.0 | 3/4 | 15      |

Export voltages available

SP=Spartanburg, SC

BR= Brookville, PA

TRANSITION FROM SPARTANBURG DISTRIBUTION CENTER TO BROOKVILLE DISTRIBUTION CENTER IN 2006 CONTACT FACTORY FOR WAREHOUSE LOCATION.



FOUL-RESISTANT CONDENSER SYSTEM PROVIDES A RELIABLE AND EXTREMELY FOUL-RESISTANT DESIGN COMPARED TO OTHER INDUSTRY STANDARDS

Excludes MT21-MT66-MT72

## OPTIONAL ACCESSORIES ON PAGE 81



SHOWN WITH OPTIONAL GRAVITY-FLO SHELF ORGANIZERS AND TAG CHANNELS

SHOWN IN WHITE EXTERIOR

- Cabinet exterior constructed of heavy-duty coated steel, standard in black or white.
- Interior constructed of heavy-duty white coated steel.
- One and one-half inch foamed-in-place CFC free polyurethane insulation for added cabinet strength and energy savings.
- Balanced refrigeration system designed to operate at 36-38°F.
- Self-closing doors with 120° stay open feature utilizing cartridge hinge system for extended hinge life allowing units to be lined up end to end.
- Hinged glass doors feature triple pane glass with tempered exterior and interior panes for safety.
- Magnetic door gaskets provide a positive seal.
- Vertical interior fluorescent lights, standard.
- Horizontal lights standard on MT10 and MT12 models.
- Adjustable white epoxy coated steel wire shelves are standard.
- Fluorescent-lighted Beverage-Air® sign panel (excludes MT10 and MT12).
- Refrigeration system utilizes ozone friendly R134a refrigerant.
- Refrigeration system on MT72 utilizes R404A refrigerant.
- Adjustable screw down feet for leveling.
- Models are shown with optional signage (See page 87).



## SLIDING GLASS DOOR

MARKETEERS®



| MODEL<br>BLACK | MODEL<br>WHITE | LIST<br>PRICE | CRATED<br>WEIGHT | F.O.B. | DOORS | FINISH | CU.FT. | OVERALL EXT.<br>INCHES<br>W x D x H | OVERALL EXT.<br>METRIC (MM)<br>W x D x H | VOLTS | AMPS | HP  | SHELVES |
|----------------|----------------|---------------|------------------|--------|-------|--------|--------|-------------------------------------|--|-------|------|-----|---------|
| MT45-B-55      | MT45-W-55      | \$5135        | 533              | SP     | 2     | W-B    | 45     | 52"x 30 1/2"x 78"                   | 1321 x 775 x 1981                        | 115   | 10.5 | 1/2 | 10      |
| MT66-B-55      | MT66-W-55      | \$6774        | 707              | SP     | 3     | W-B    | 66     | 75"x 30 1/2"x 78"                   | 1905 x 775 x 1981                        | 115   | 12.0 | 3/4 | 15      |
| MT38-B-55      | MT38-W-55      | \$4645        | 478              | SP     | 2     | W-B    | 38     | 43 1/2" x 30 1/2" x 78"             | 1105 x 775 x 1981                        | 115   | 10.5 | 1/2 | 10      |

Export voltages available

SP=Spartanburg, SC BR= Brookville, PA

TRANSITION FROM SPARTANBURG DISTRIBUTION CENTER TO BROOKVILLE  
DISTRIBUTION CENTER IN 2006 CONTACT FACTORY FOR WAREHOUSE LOCATION.

ASK US ABOUT OUR TOP HUNG  
MAINTENANCE FREE SLIDE DOOR  
ROLLER-TRACK ASSEMBLY

SHOWN WITH OPTIONAL GRAVITY-FLO  
SHELF ORGANIZERS AND TAG CHANNELS

- Cabinet exterior constructed of heavy duty coated steel, standard in black or white.
- Interior constructed of heavy-duty white coated steel.
- One and one-half inch foamed-in-place CFC free polyurethane insulation for added cabinet strength and energy savings.
- Balanced refrigeration system designed to operate at 36-38°F.
- Self-closing sliding glass doors are hung with steel ball-bearing rollers on a stainless steel track for ease of use and durability.
- Sliding glass doors feature triple pane glass with tempered exterior and interior panes for safety.
- Vertical interior fluorescent lights, standard.
- Adjustable white epoxy coated steel wire shelves are standard.
- Fluorescent-lighted Beverage-Air® sign panel.
- Refrigeration system utilizes ozone friendly R134a refrigerant.
- Refrigeration system on MT66 utilizes R404A refrigerant.
- Adjustable screw down feet for leveling.
- Models are shown with optional signage (See page 87).



GLASS DOOR MERCHANDISERS

MARKETEERS®

65



BEVERAGE-AIR

## FREEZERS AND REFRIGERATORS

## GLASS DOOR

| MODEL   | LIST PRICE | CRATED WEIGHT | F.O.B. | DOORS | FINISH | CU.FT. | OVERALL EXT. INCHES<br>W x D x H | OVERALL EXT. METRIC (MM)<br>W x D x H | VOLTS          | AMPS | HP    | SHELVES |
|---------|------------|---------------|--------|-------|--------|--------|----------------------------------|---------------------------------------|----------------|------|-------|---------|
| CFG12-1 | \$5378     | 250           | BR     | 1     | W      | 12     | 24" x 23 3/4" x 65"              | 610 x 603 x 1651                      | 115            | 9.8  | 1/2   | 3       |
| CFG24-1 | \$7519     | 454           | BR     | 1     | W      | 20.7   | 26" x 32" x 79 1/4"              | 660 x 813 x 2013                      | 115            | 12.0 | 3/4   | 3       |
| CFG48-5 | \$10237    | 682           | BR     | 2     | W      | 44.9   | 52" x 32" x 79 1/4"              | 1321 x 813 x 2013                     | 208-230<br>115 | 10.5 | 1     | 6       |
| CFG74-5 | \$14775    | 968           | BR     | 3     | W      | 69.2   | 78" x 32" x 79 1/4"              | 1981 x 813 x 2013                     | 208-230<br>115 | 16.0 | 1-1/2 | 9       |
| CRG24-1 | \$4164     | 373           | BR     | 1     | W      | 20.7   | 26" x 32" x 79 1/4"              | 660 x 813 x 2013                      | 115            | 5.5  | 1/4   | 3       |
| CRG48-1 | \$5869     | 568           | BR     | 2     | W      | 44.9   | 52" x 32" x 79 1/4"              | 1321 x 813 x 2013                     | 115            | 10.6 | 1/3   | 6       |
| CRG74-1 | \$7821     | 921           | BR     | 3     | W      | 69.2   | 78" x 32" x 79 1/4"              | 1981 x 813 x 2013                     | 115            | 12.0 | 3/4   | 9       |

Export voltages available

For total depth add 1 3/4" for door handle

BR= Brookville, PA

FOR YOUR SIDE-BY-SIDE  
REFRIGERATOR/FREEZER USAGE, YOU  
WILL NOT FIND A CLEANER  
ATTRACTIVE LOOK

OPTIONAL ACCESSORIES ON PAGE 81



- Cabinet interior and exterior constructed of heavy-duty white coated steel.
- Two inch CFC free foamed-in-place polyurethane insulation, for added strength and energy efficiency (exclude CFG12).
- Balanced refrigeration system designed to operate at 36-38°F.
- Freezer models designed to hold product at -5 to -15°F.
- The CFG12 operates at 0 to -10°F.
- Freezer models feature an automatic defrost.
- Self-closing doors with 120° stay open feature utilizing cartridge hinge system for extended hinge life allowing units to be lined up end to end.
- Triple pane tempered glass doors on refrigerator models.
- Heated hinged triple pane tempered glass doors on freezer models.
- Magnetic door gaskets provide positive seal.
- Vertical interior fluorescent lights, standard.
- Exterior lighted sign panel available with custom signage.
- Refrigerators utilize ozone friendly R134a refrigerant. CRG74 uses R404A.
- Freezers utilize ozone friendly R404A refrigerant.
- Adjustable screw down feet for leveling, casters available.
- Remote models available, consult factory.
- Optional accessories.
- Models are shown with optional signage.

C-SERIES



## SPECIAL APPLICATION

### MERCHANDISERS



| MODEL<br>BLACK | MODEL<br>WHITE | LIST<br>PRICE | CRATED<br>WEIGHT | F.O.B. | DOORS/<br>LIDS | FINISH | CU.FT. | OVERALL EXT.<br>INCHES<br>W x D x H | OVERALL EXT.<br>METRIC (MM)<br>W x D x H | VOLTS | AMPS | HP  | SHELVES/<br>DIVIDERS |
|----------------|----------------|---------------|------------------|--------|----------------|--------|--------|-------------------------------------|--|-------|------|-----|----------------------|
| MM14-B         | NA             | \$5522        | 344              | SP     | 2              | B      | 14     | 36"x 25"x 56 1/2"                   | 914 x 635 x 1435                         | 115   | 9.6  | 1/3 | 3                    |

Export voltages available

SP=Spartanburg, SC BR= Brookville, PA

TRANSITION FROM SPARTANBURG DISTRIBUTION CENTER TO BROOKVILLE  
DISTRIBUTION IN 2006 CONTACT FACTORY FOR WAREHOUSE LOCATION

IMPULSE SALES WITH A UNIQUE STYLE

DOUBLE YOUR MERCHANDISING PROFITS

#### Maxi-Marketers

- Maxi-Marketers (MM models) feature a curved front with hinged glass doors for merchandising applications requiring enhanced eye appeal.
- Cabinet exterior constructed of heavy-duty coated steel, standard in black.
- Interior constructed of heavy-duty white coated steel.
- Adjustable white epoxy coated steel wire shelves are standard.
- Hinged glass doors feature triple pane glass with tempered exterior and interior panes for safety.

MM14



GLASS DOOR MERCHANDISERS

## MERCHANDISERS



BEVERAGE-AIR

## COUNTERTOP

## MERCHANDISERS

| MODEL       | LIST PRICE | CRATED WEIGHT | F.O.B. | DOORS            | FINISH | CU.FT. | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | VOLTS | AMPS | HP  | SHELVES |
|-------------|------------|---------------|--------|------------------|--------|--------|-------------------------------|------------------------------------|-------|------|-----|---------|
| CR5-1W-G    | \$3175     | 175           | BR     | 1                | W      | 5      | 22"x 21 1/2"x 39"             | 559 x 546 x 991                    | 115   | 5.9  | 1/4 | 3       |
| CR5GE-1W-G  | \$3679     | 200           | BR     | 1                | W      | 5      | 22"x 21 1/2"x 39"             | 559 x 546 x 991                    | 115   | 5.9  | 1/4 | 3       |
| CRD5-1W-G   | \$3936     | 205           | BR     | 2                | W      | 5.5    | 22"x 21 1/2"x 39"             | 559 x 546 x 991                    | 115   | 5.9  | 1/4 | 3       |
| CRD5GE-1W-G | \$4445     | 230           | BR     | 2                | W      | 5.5    | 22"x 21 1/2"x 39"             | 559 x 546 x 991                    | 115   | 5.9  | 1/4 | 3       |
| CF5-1W-G    | \$3819     | 175           | BR     | 1                | W      | 5      | 22"x 21 1/2"x 39"             | 559 x 546 x 991                    | 115   | 7.5  | 1/3 | 3       |
| UR30GFD-B   | \$2337     | 199           | SP     | 1                | W-B    | 6.3    | 20 3/8"x 23"x 35"             | 518 x 584 x 889                    | 115   | 4.0  | 1/5 | 3       |
| UR30GEFD-B  | \$2698     | 199           | SP     | 1                | W-B    | 6.3    | 20 3/8"x 23"x 35"             | 518 x 584 x 889                    | 115   | 4.0  | 1/5 | 3       |
| UR75-1-W    | \$2741     | 116           | SP     | 1                | W      | 2.6    | 21" x 14" x 38 3/4"           | 533 x 356 x 984                    | 115   | 4.0  | 1/6 | 2       |
| CT96        | \$2337     | 160           | SP     | 1                | W-B    | 6.8    | 20.87"x25"x38.25"             | 530 x 635 x 971.6                  | 115   | 4.0  | 1/5 | 3       |
| CT96GE      | \$2698     | 160           | SP     | 1                | W-B    | 6.8    | 20.87"x25"x38.25"             | 530 x 635 x 971.6                  | 115   | 4.0  | 1/5 | 3       |
| PC51-1A     | \$6591     | 225           | SP     | 2 GLASS (REAR)   | S/S    | 7.0    | 51 1/2"x 20"x 25 1/4"         | 1308 x 508 x 641                   | 115   | 5.0  | 1/5 | 1       |
| PC51-1AS    | \$6519     | 225           | SP     | 2 GLASS (FRONT)  | S/S    | 7.0    | 51 1/2"x 20"x 25 1/4"         | 1308 x 508 x 641                   | 115   | 5.0  | 1/5 | 1       |
| PCD51-1A    | \$6954     | 225           | SP     | 4 GLASS (FRT/RR) | S/S    | 7.0    | 51 1/2"x 20"x 25 1/4"         | 1308 x 508 x 641                   | 115   | 5.0  | 1/5 | 1       |

Export voltages available

SP=Spartanburg, SC BR= Brookville, PA

TRANSITION FROM SPARTANBURG DISTRIBUTION CENTER TO BROOKVILLE  
DISTRIBUTION IN 2006 CONTACT FACTORY FOR WAREHOUSE LOCATION



UR75



CF5



PC51



UR30GFD



CT96

## OPTIONAL ACCESSORIES ON PAGE 81

- The PC51 features stainless steel exterior and interior, operates at 35-38°F and is ideal for merchandising pies, cakes and pastries. Available in four model configurations.
- The CR5 countertop lighted display refrigerator or the CF5 display freezer are designed to merchandise product for easy access with lighted "Cold Drinks" or "Frozen Treats" sign panel. Field reversible triple pane tempered glass doors on refrigerators, freezers feature heated hinged glass doors, available in pass-thru models and with glass end panels for enhanced product display.
- UR30GFD can be used for the display of pre-packaged food product and beverages. UR30GFD features three adjustable wire shelves, interior fluorescent light, leveler feet and optional glass end panels for enhanced product display.
- Foamed-in-place CFC free polyurethane insulation for added cabinet strength and energy efficiency.
- Refrigerators utilize ozone friendly R134a refrigerant.
- Freezers utilize ozone friendly R404A refrigerant.
- UR75 and CF5 shown with optional signage.
- Optional accessories available.

## MERCHANDISERS





Turn to the Experts.™



MERCHANDISERS



## OPEN-AIR MERCHANDISERS

IMPULSE SALES WITH A UNIQUE STYLE. HIGH VISIBILITY AND EASY ACCESSIBILITY CREATES A GREATER MERCHANDISING IMPACT AND WILL SERVE AS A GREAT ADDED FEATURE IN YOUR STORE, RESTAURANT OR OTHER ESTABLISHMENT.

WHEN YOU PURCHASE A BEVERAGE-AIR® OPEN-AIR MERCHANDISER, REST ASSURED KNOWING YOU ARE GETTING THE BEST.

## SPECIAL APPLICATION

## OPEN-AIR MERCHANDISERS

| MODEL     | LIST PRICE | CRATED WEIGHT | F.O.B. | DOORS/ LIDS | FINISH | CU.FT. | OVERALL EXT. INCHES<br>W x D x H | OVERALL EXT. METRIC (MM)<br>W x D x H | VOLTS | AMPS | HP  | SHELVES/ DIVIDERS |
|-----------|------------|---------------|--------|-------------|--------|--------|----------------------------------|---------------------------------------|-------|------|-----|-------------------|
| SMM10-1-W | \$5192     | 143           | SP     | -           | W      | 5.3    | 30" x 30" x 54 1/3"              | 760 x 760 x 1380                      | 115   | 8.3  | 3/4 | -                 |
| BZ13-1-B  | \$6634     | 315           | SP     | -           | W-B    | NA     | 29 1/2"x 32 1/4"x 54             | 749 x 819 x 1372                      | 115   | 12.0 | 1/2 | 3                 |
| BZ16-B    | \$7892     | 563           | SP     | -           | W-B    | NA     | 36"x 32"x 62"                    | 914 x 813 x 1575                      | 115   | 12.0 | 3/4 | 4                 |

SP= Spartanburg, SC BR= Brookville, PA

OPTIONAL ACCESSORIES ON PAGE 81

TRANSITION FROM SPARTANBURG DISTRIBUTION CENTER TO BROOKVILLE DISTRIBUTION IN 2006  
CONTACT FACTORY FOR WAREHOUSE LOCATION.

IMPULSE SALES WITH A UNIQUE STYLE  
DOUBLE YOUR MERCHANDISING PROFITS



CAN BE USED FOR STORAGE OF  
PREPACKAGED FOOD PRODUCTS



#### The Breeze (BZ)

- The Breeze open air curtain refrigerator is the optimal product merchandiser and is available in two sizes, BZ13 and BZ16.
- Refrigeration system on BZ16 utilizes ozone friendly R404A refrigerant.
- Refrigeration system on BZ13 utilizes R134a refrigerant.
- Side shield on BZ13 maximizes product display.
- Rounded front on BZ16 maximizes product display.
- Lighting provided via two recessed interior lights for maximum product visibility.
- Modern grille easy to remove for cleaning and servicing.
- Heavy duty high performance one-piece lift-out refrigeration system.
- The Breeze is a uniquely designed air curtain cabinet tailored for product placement in all markets.
- Gravity-Flo organizers standard.

#### Sales Maker (SMM 10)

- Unique design and shape provides excellent cooling.
- Great all-around visibility and accessibility.
- Display area has three partitions that can be used for different products.
- Highly flexible plug-in merchandiser is easy to place and easy to relocate.
- Forced air circulation ensures effective cooling with a low and even temperature throughout the display.
- Quick and easy reloading. Easy to lift top and refill. Always fresh beverages with unique first in, first out (FIFO) system.
- Use it to increase your sales anywhere in supermarkets, department stores, convenience stores, restaurants, and cafeterias.

MERCHANDISERS



## ISLAND AND SPOT OPEN-AIR MERCHANDISERS



| MODEL       | LIST PRICE | TYPE UNIT              | CRATED WEIGHT | F.O.B | FINISH              | CU.FT. | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | VOLTS  | AMPS | HP |
|-------------|------------|------------------------|---------------|-------|---------------------|--------|-------------------------------|------------------------------------|--------|------|----|
| BACOHM3-1-W | \$8300     | Open Air               | 423           | BR    | W                   | -      | 34" x 40" x 42 5/16"          | -                                  | 115/60 | 10.0 |    |
| BACOHM4-1-W | \$9363     | Open Air               | 505           | BR    | W                   | -      | 34" x 54" x 42 5/16"          | -                                  | 115/60 | 10.0 |    |
| BAOHM3-1-W  | \$8143     | Open Air               | 423           | BR    |                     |        | 40" x 34" x 42 5/16"          |                                    | 115/60 | 10.0 |    |
| BAOHM4-1-W  | \$9185     | Open Air               | 505           | BR    |                     |        | 52" x 34" x 42 5/16"          |                                    | 115/60 | 10.0 |    |
| BACOI17-1-W | \$11139    | Open Top Glass Freezer | 250           | SP    | Aluminum Extrusions | 5      | 38" x 32" x 35 1/2"           | 965 x 813 x 902                    | 115    | 7.5  | 1  |
| BACOI33-1-W | \$15205    | Open Top Glass Freezer | 450           | SP    | Aluminum Extrusions | 11     | 55" x 38" x 35 1/2"           | 1397 x 965 x 902                   | 115    | 16   | 2  |

SP= Spartanburg, SC BR= Brookville, PA

TRANSITION FROM SPARTANBURG DISTRIBUTION CENTER TO  
BROOKVILLE DISTRIBUTION CENTER IN 2006 CONTACT  
FACTORY FOR WAREHOUSE LOCATION.

### BACOI Frozen Product Merchandisers

- Open access to frozen products.
- Air flow management achieved through forced air circulation creating an air curtain over the product display area.
- Cabinet exterior of extruded aluminum profiles and insulated glass.
- Durable powder-paint finish.
- Perimeter lighting brilliantly illuminates product packages.
- Fully automatic hot gas defrost and evaporation of defrost water by means of a condenser coil.
- Roller type wheels and thermometer standard.
- Environmentally friendly R-134a refrigerant.
- Reliable capillary tube refrigerant control.
- Supplied with a 15A power cord.

### BACOHM Curved Glass

#### Open Horizontal Merchandisers

- The BACOHM curved glass open merchandiser is available in 2 sizes, BACOHM3 and BACOHM4.
- Stainless steel top provides neat work surface. Stainless shelves and deck pans standard.
- ABS front and side panels are scratch and dent resistant and are easily cleaned.
- Metal parts are finished with high quality powder coat paint.
- Unique "Microprocessor" control system.

### FLEXIBILITY AND VISIBILITY

#### UNSURPASSED

### MERCHANDISERS



microprocessor control

Fewer components  
Reduced risk of product loss  
Increased shelf life  
Greater reliability  
Lower energy costs  
Ease of maintenance

OPEN-AIR MERCHANDISERS





## MULTI-DECK

### OPEN-AIR MERCHANDISERS

| MODEL | LIST PRICE | CRATED WEIGHT | F.O.B. | FINISH | CU.FT. | OVERALL EXT. INCHES<br>W x D x H | OVERALL EXT. METRIC (MM)<br>W x D x H | VOLTS |
|-------|------------|---------------|--------|--------|--------|----------------------------------|---------------------------------------|-------|
| MB9   | \$11509    | 474           | SP     | W      | 18.4   | 35"x33 1/2"x78 1/3"              | 890 x 850 x 1990                      | 115   |
| MB13  | \$13072    | 573           | SP     | W      | 26.5   | 49"x33 1/2"x78 1/3"              | 1250 x 850 x 1990                     | 115   |

SP= Spartanburg, SC BR= Brookville, PA



MB13

### DOUBLE YOUR MERCHANDISING PROFITS

OPTIONAL ACCESSORIES ON PAGE 81

#### Maxima Multi-Deck Merchandisers

- Maxima is a series of excellent show-cases and is available in 2 sizes, M9 and M13.
  - Refrigeration system utilizes ozone friendly R404a refrigerant.
  - Timer controlled automatic defrost with automatic evaporation of defrost water.
  - Cyclic reverse of condenser airflow - for automatic cleaning of condenser.
  - Adjustable feet are standard.
  - Adjustable shelves provide greater merchandising flexibility.
- Options and accessories**
- Dividers.
  - Front stops.
  - Price ticket strips.
  - Night blind.
  - Transparent plastic cover for light box.
  - Casters.
  - Contact factory for pricing and availability.

CAN BE USED FOR STORAGE OF PREPACKAGED FOOD PRODUCTS



MB9

### MERCHANDISERS



Turn to the Experts.™



DELI CASES

## DELI CASES, STEP-INS, AND CONDENSING SYSTEMS

MAXIMIZE PRODUCT VISIBILITY WITH BEVERAGE-AIR® DELI CASES. EXCELLENT PERFORMANCE AND DISPLAY CAPACITY COMBINE TO CREATE A UNIT DESIGNED TO ENHANCE YOUR MERCHANDISING NEEDS. THE MORE CHOICES YOUR CUSTOMERS HAVE, THE MORE THEY WILL BUY.

WHEN A REACH-IN IS NOT ENOUGH, BEVERAGE-AIR® IS YOUR SOURCE FOR STEP-IN REFRIGERATION SYSTEMS. EASILY ASSEMBLED. AS YOUR LOCATION EXPANDS, SO WILL YOUR STORAGE NEEDS. NEVER WORRY ABOUT HAVING ORDERED THE WRONG SIZE - UNITS CAN BE ENLARGED BY SIMPLY ADDING ADDITIONAL PANELS. OUR QUALITY IS EVIDENT.

## HORIZONTAL

## DISPLAY CASES

| MODEL   | LIST PRICE | CRATED WEIGHT | F.O.B. | FINISH | CU.FT. | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | VOLTS | AMPS | HP  | SHELVES |
|---------|------------|---------------|--------|--------|--------|-------------------------------|------------------------------------|-------|------|-----|---------|
| DMC4/W  | \$7805     | 482           | BR     | W      | 27.7   | 48" x 36 1/2" x 54"           | 1219 x 927 x 1372                  | 115   | 7.0  | 1/3 | 1       |
| DMCS4/W | \$8452     | 482           | BR     | W      | 27.7   | 48" x 36 1/2" x 54"           | 1219 x 927 x 1372                  | 115   | 7.0  | 1/3 | 1       |
| DMC6/W  | \$9057     | 610           | BR     | W      | 45.8   | 72" x 36 1/2" x 54"           | 1829 x 927 x 1372                  | 115   | 7.0  | 1/3 | 2       |
| DMCS6/W | \$9933     | 610           | BR     | W      | 45.8   | 72" x 36 1/2" x 54"           | 1829 x 927 x 1372                  | 115   | 7.0  | 1/3 | 2       |
| DMC8/W  | \$11333    | 805           | BR     | W      | 63.9   | 96" x 36 1/2" x 54"           | 2438 x 927 x 1372                  | 115   | 10.5 | 1/2 | 2       |
| SDC4/W  | \$7308     | 470           | BR     | W      | 27.7   | 48" x 36 1/2" x 54"           | 1219 x 927 x 1372                  | 115   | 6.8  | 1/4 | 1       |
| SDCS4/W | \$8051     | 470           | BR     | W      | 27.7   | 48" x 36 1/2" x 54"           | 1219 x 927 x 1372                  | 115   | 6.8  | 1/4 | 1       |
| SDC6/W  | \$8617     | 590           | BR     | W      | 45.8   | 72" x 36 1/2" x 54"           | 1829 x 927 x 1372                  | 115   | 8.5  | 1/3 | 2       |
| SDCS6/W | \$9458     | 590           | BR     | W      | 45.8   | 72" x 36 1/2" x 54"           | 1829 x 927 x 1372                  | 115   | 8.5  | 1/2 | 2       |

Export voltages available

BR= Brookville, PA

BUILT-IN ACCESSORY OUTLET FOR  
SCALES AND SLICERS

## OPTIONAL ACCESSORIES ON PAGE 81

- DMC models equipped with a gravity coil refrigeration system complete with automatic defrost clock to enhance the preservation of meat and deli product, includes lower storage area accessible through solid hinged door at bottom rear.
- SDC models have a low velocity forced air refrigeration system balanced to provide optimum temperature and humidity for product life.
- Cabinet front on DMC models supplied with a large triple pane tempered glass window with fluorescent light interior for easy product viewing.
- DMCS and SDCS models equipped with front sliding triple pane tempered glass doors for easy customer access.
- Rear mount self-closing sliding triple pane tempered glass doors with stay open feature allow for easy product loading.
- Stainless steel top with 115-volt receptacle on rear upper left for scales or slicers.
- Cabinet exterior constructed of heavy duty white coated steel.
- Steel and coved corner stainless steel floor for easy cleaning complete with drain and hose connection at lower rear of cabinet 2" from floor.
- Foamed-in-place CFC free polyurethane insulation for added cabinet strength and energy savings.
- Refrigeration system utilizes ozone friendly R134a refrigerant.
- Adjustable stainless steel, cantilever shelving for optimum product display, optional shelf light available.
- Optional accessories available.
- UL approved.

## DELI MEAT AND SANDWICH DISPLAY CASES



## CURVED GLASS

MARKETEERS®



DELI CASES, STEP-INS, AND CONDENSING SYSTEMS

| MODEL    | LIST PRICE | CRATED WEIGHT | F.O.B. | FINISH | CU.FT. | OVERALL EXT. INCHES W x D x H | OVERALL EXT. METRIC (MM) W x D x H | VOLTS | AMPS | HP  | SHELVES |
|----------|------------|---------------|--------|--------|--------|-------------------------------|------------------------------------|-------|------|-----|---------|
| CDR3     | \$11108    | 541           | BR     | W-B    | 13.4   | 37"x 35"x 46"                 | 940 x 889 x 1168                   | 115   | 8.5  | 1/3 | 2       |
| CDR4     | \$12242    | 648           | BR     | W-B    | 18.1   | 49"x 35"x 46"                 | 1245 x 889 x 1168                  | 115   | 8.5  | 1/3 | 2       |
| CDD4     | \$10315    | 543           | BR     | W-B    | 18.1   | 49"x 35"x 46"                 | 1245 x 889 x 1168                  | 115   | 1.8  | N/A | 2       |
| CDR5     | \$13572    | 755           | BR     | W-B    | 22.9   | 61"x 35"x 46"                 | 1549 x 889 x 1168                  | 115   | 10.5 | 1/2 | 2       |
| CDR6     | \$14756    | 862           | BR     | W-B    | 27.6   | 73"x 35"x 46"                 | 1854 x 889 x 1168                  | 115   | 10.5 | 1/2 | 2       |
| CDR3/1-S | \$11366    | 541           | BR     | S      | 13.4   | 37"x 35"x 46"                 | 940 x 889 x 1168                   | 115   | 8.5  | 1/3 | 2       |
| CDR4/1-S | \$12565    | 648           | BR     | S      | 18.1   | 49"x 35"x 46"                 | 1245 x 889 x 1168                  | 115   | 8.5  | 1/3 | 2       |
| CDR5/1-S | \$13959    | 755           | BR     | S      | 22.9   | 61"x 35"x 46"                 | 1549 x 889 x 1168                  | 115   | 10.5 | 1/2 | 2       |
| CDR6/1-S | \$15209    | 862           | BR     | S      | 27.6   | 73"x 35"x 46"                 | 1854 x 889 x 1168                  | 115   | 10.5 | 1/2 | 2       |

Export voltages available

BR= Brookville, PA

## CURVED EUROPEAN GLASS

- Refrigerated and Dry Curved Glass Marketeers® enhance product presentation, stimulate impulse purchases of food and beverage product.
- Cabinet exterior constructed of heavy-duty black or white coated steel, with 14" stainless steel top, stainless steel exterior and interior available.
- Cabinet interior constructed of heavy-duty coated steel and stainless steel floor.
- Stainless steel exterior models include stainless steel interior.
- Foamed-in-place CFC free polyurethane insulation for added cabinet strength and energy savings.
- Self-closing tempered sliding glass thermal pane doors with lock and stay open feature at cabinet rear provide convenient access to displayed product.
- Refrigeration system designed to provide optimum internal temperature and humidity for extended product life.
- Non-refrigerated Dry Display Marketeers® in four-foot length equipped with low velocity interior fan to maintain interior temperatures at slightly above external ambient temperature for the display of bakery products.
- Adjustable white epoxy coated steel wire shelves are standard (two per unit).
- Product is brilliantly illuminated with a fluorescent canopy light and two shelf lights suspended from adjustable epoxy coated shelves.
- Standard mirrored interior sides.
- CDR models are UL sanitation approved.



## CURVED GLASS REFRIGERATORS AND DRY DISPLAY

75



BEVERAGE-AIR



## PRODUCT DISPLAY CASES

OPEN, CURVED, AND FLAT GLASS

DELI CASES, STEP-INS, AND CONDENSING SYSTEMS

WHISPER QUIET OPERATION  
EQUALLY ATTRACTIVE IN A LINE-UP  
OR AS STAND ALONE  
MERCHANDISERS



## OPTIONAL ACCESSORIES ON PAGE 81

- Stainless top on all model provides neat work surface.
- Stainless shelves and deck pans are standard on all models.
- ABS front and side panels are scratch and dent resistant and are easily cleaned.
- Flat glass models are offered in a full line of product displays, including frozen product merchandisers, refrigerated deli merchandisers, dry/bakery merchandisers, and the open merchandisers.
- Curved glass models offered in a full line of product displays, including frozen product merchandisers, refrigerated deli merchandisers, dry/bakery merchandisers, and open merchandisers.
- RPD-PT4 has self-closing sliding doors on both sides so customers can help themselves.
- Dry and Refrigerated Product Displays include hinged lift-glass fronts for ease of cleaning and restocking.
- Fluorescent mezzanine lighting highlights merchandise.
- Choice of 2 standard colors, white or black. Contact factory for availability.

OPEN, CURVED, AND FLAT GLASS



**PRODUCT DISPLAY CASES**  
OPEN, CURVED, AND FLAT GLASS



DELI CASES, STEP-INS, AND CONDENSING SYSTEMS

| CURVED       |            |       |                 |     |     |          |        |          |                  |          |
|--------------|------------|-------|-----------------|-----|-----|----------|--------|----------|------------------|----------|
| MODEL        | LIST PRICE | F.O.B | TYPE UNIT       | L   | W   | H        | VOLTS  | RUN AMPS | CU. FT. CAPACITY | SHIP WT. |
| BACOHM3-1-W  | \$8300     | BR    | Open Air        | 40" | 34" | 42 5/16" | 115/60 | 10.0     | -                | 423      |
| BACOHM4-1-W  | \$9363     | BR    | Open Air        | 54" | 34" | 42 5/16" | 115/60 | 10.0     | -                | 505      |
| BACRPD3-1-W  | \$16283    | BR    | Refrigerator    | 40" | 34" | 51 3/4"  | 115/60 | 11.0     | 10.8             | 463      |
| BACRPD4-1-W  | \$17745    | BR    | Refrigerator    | 52" | 34" | 51 3/4"  | 115/60 | 11.0     | 14.4             | 526      |
| BACDPD3-1-W  | \$10502    | BR    | Dry             | 40" | 34" | 51 3/4"  | 115/60 | 2        | 10.8             | 403      |
| BACDPD4-1-W  | \$11220    | BR    | Dry             | 52" | 34" | 51 3/4"  | 115/60 | 2        | 14.4             | 466      |
| FLAT         |            |       |                 |     |     |          |        |          |                  |          |
| BAOHM3-1-W   | \$8143     | BR    | Open Air        | 40" | 34" | 42 5/16" | 115/60 | 10.0     | -                | 423      |
| BAOHM4-1-W   | \$9185     | BR    | Open Air        | 52" | 34" | 42 5/16" | 115/60 | 10.0     | -                | 505      |
| BARPD3-1-W   | \$10014    | BR    | Refrigerator    | 40" | 34" | 51 3/4"  | 115/60 | 11.0     | 10.8             | 443      |
| BARPD4-1-W   | \$10440    | BR    | Refrigerator    | 52" | 34" | 51 3/4"  | 115/60 | 11.0     | 14.4             | 506      |
| BARPD4PT-1-W | \$10962    | BR    | Ref. Self-Serve | 52" | 34" | 51 3/4"  | 115/60 | 11.0     | 14.4             | 506      |
| BAFPD3-1-W   | \$10042    | BR    | Freezer         | 40" | 34" | 51 3/4"  | 115/60 | 11.7     | 10.8             | 505      |
| BAFPD4-1-W   | \$10648    | BR    | Freezer         | 52" | 34" | 51 3/4"  | 115/60 | 11.7     | 14.4             | 580      |
| BADPD3-1-W   | \$7553     | BR    | Dry             | 40" | 34" | 51 3/4"  | 115/60 | 1        | 10.8             | 446      |
| BADPD4-1-W   | \$7959     | BR    | Dry             | 52" | 34" | 51 3/4"  | 115/60 | 1        | 14.4             | 383      |

Export voltages available

BR= Brookville, PA



**microprocessor control**

- Fewer components
- Reduced risk of product loss
- Increased shelf life
- Greater reliability
- Lower energy costs
- Ease of maintenance

OPEN, CURVED, AND FLAT GLASS



**BEVERAGE-AIR**

## STEP-IN

## COOLERS AND FREEZERS

\* Height-take 14 1/2" off height because size includes refrigeration system.

| COOLERS: 38 DEGREES FAHRENHEIT |            |        |                           |           |                  |   |      |              |                    |             |
|--------------------------------|------------|--------|---------------------------|-----------|------------------|---|------|--------------|--------------------|-------------|
| MODEL                          | LIST PRICE | F.O.B. | ACTUAL SIZE*<br>W x D x H | DOOR SIZE | CAPACITY<br>(FT) | REFRIGERATION<br>CAPACITY (BTUH @ 95 DEGREES<br>FAHRENHEIT AMBIENT) | MOPD | ELECTRICAL   | NEMA<br>RECEPTACLE | SHIP WEIGHT |
| SIC7-46-T-1                    | \$13259    | CT     | 4'-0" x 5'-6" x 9'-6"     | 30" x 78" | 118              | 4700  | 20   | 115/60/1     | 5-20R              | 850         |
| SIC7-66-T-1                    | \$14514    | CT     | 5'-6" x 6'-0" x 9'-6"     | 30" x 78" | 186              | 4700  | 20   | 115/60/1     | 5-20R              | 1015        |
| FREEZERS: 0 DEGREES FAHRENHEIT |            |        |                           |           |                  |   |      |              |                    |             |
| SIF7-46-T-5                    | \$15333    | CT     | 4'-0" x 5'-6" x 9'-6"     | 30" x 78" | 118              | 4100  | 15   | 208-230/60/1 | 6-15R              | 950         |
| SIF7-66-T-5                    | \$16589    | CT     | 5'-6" x 6'-0" x 9'-6"     | 30" x 78" | 186              | 4100  | 15   | 208-230/60/1 | 6-15R              | 1115        |

Export voltages available

CT=CONTACT FACTORY

## STANDARD SPECIFICATIONS FOR REFRIGERATORS AND FREEZERS

Air-Cooled Condenser  
Automatic Condensate Evaporator  
Defrost Time Clock  
Door Frame Heater  
High Pressure Control  
Electric Defrost System  
Interior Vapor-Proof Light Fixture  
Magnetic Door Seal  
NSF Listing  
Self-Closing Door Closer  
Ten Year Panel Warranty  
Top (Ceiling) Mounted Refrigeration Package  
Thermostatic Expansion Valve

UL Listing ( Door Frame )  
Interior & exterior panel finish,constructed from  
26 gauge Stucco Embossed Galvanized Steel  
Clear Interior Height 7'-0" High  
Interior floor constructed of 100" Smooth Mill Finish  
Hardened Aluminum  
3.5" Poured in Place Urethane Foam Insulation  
Door Hardware includes Lock with  
Entrapment Release  
Door Hardware includes Lock with  
Entrapment Release  
30" x 78" Net Door Opening  
2.5" Dial Type Temperature Indicator



REFRIGERATION PACKAGE SIMPLY  
DROPS IN PLACE

## step-in refrigeration units are quickly installed

- Refrigeration Technicians are not needed. The top mount self-contained Refrigeration Package simply drops in place.
- Available in both Refrigerator (38 degrees Fahrenheit) and Freezer (0 degrees Fahrenheit) temperature ranges.
- Equipment uses industry standard cam-lock panel technology to make unit easy to assemble.
- Units can be disassembled and relocated.
- Never worry about having ordered the wrong size, units can be enlarged by adding additional panels.
- Complete with (UL) Electrical and (NSF) Sanitation certifications.

## quality is evident

- Insulated with Non-CFC poured in place Urethane foam.
- Doors are constructed with massive internal support structure to resist abuse and misuse.
- The finish is stucco embossed which is easily cleaned.
- The interior and exterior finish is made from top-quality heavy duty metal capable of resisting damage in commercial kitchens.
- Floor material is finished with a hardened aluminum alloy to resist damage.

## FACTORY INSTALLED OPTIONS

| OPTIONS / ACCESSORIES  | OPTION NUMBER | H.P. RANGE          | MC OUTDOOR | ME INDOOR |
|--|---------------|---------------------|------------|-----------|
| CRANKCASE HEATER   | CCH-1         | 1/2 thru 1-1/2 H.P. | STD.       | \$125     |
| LIQUID LINE COMPONENTS<br>- FILTER DRIER, SIGHT-GLASS AND PIPING | LK-MC1        | 1/2 thru 1-1/2 H.P. | STD.       | \$276     |
| SUCTION LINE COMPONENTS<br>- FILTER AND PIPING                   | SK-MC1        | 1/2 thru 1-1/2 H.P. | STD.       | \$181     |
| LOW AMBIENT FLOODED HEAD PRESSURE CONTROL                        | FLD-SF        | 1/2 thru 1-1/2 H.P. | \$299      | \$299     |
| MILD AMBIENT FAN CYCLE (DUAL FAN)                                | FC-1          | 1-1/2 H.P.          | \$186      | \$192     |

\*part pricing applies to condensing systems

## HERMETIC COMPRESSOR MODELS

|                        | NOM<br>H.P. | MODEL<br>NUMBER<br>MCH/MEH | OUTDOOR UNIT<br>MCH<br>BASE PRICE |        | INDOOR UNIT<br>MEH<br>BASE PRICE |        | 4 YEAR<br>COMPRESSOR<br>WARRANTY<br>NET | SHIPPING WEIGHT<br>(LBS) |     |
|------------------------|-------------|----------------------------|-----------------------------------|--------|----------------------------------|--------|---|--------------------------|-----|
|                        |             |                            | 230/3                             | 230/1  | 230/3                            | 230/1  |   | MCH                      | MEH |
| LOW TEMP<br>404A       | 0.50        | 050L44P<br>075L44P         | N/A                               | \$2443 | N/A                              | \$2202 | \$102 NET                               | 170                      | 170 |
|                        | 0.75        |                            | \$2702                            | \$2702 | \$2482                           | \$2482 | \$113 NET                               | 175                      | 175 |
|                        | 1.00        | 100L44P<br>165L44P         | \$2749                            | \$2749 | \$2670                           | \$2670 | \$118 NET                               | 180                      | 180 |
|                        | 1.50        |                            | \$2781                            | \$2781 | \$2713                           | \$2713 | \$127 NET                               | 240                      | 240 |
| MEDIUM<br>TEMP<br>404A | 0.50        | 050M44P<br>075M44P         | N/A                               | \$3048 | N/A                              | \$2283 | \$108 NET                               | 170                      | 170 |
|                        | 0.75        |                            | \$3219                            | \$3257 | \$2499                           | \$2499 | \$118 NET                               | 175                      | 175 |
|                        | 1.00        | 101M44P<br>150M44P         | \$3326                            | \$3326 | \$2626                           | \$2626 | \$122 NET                               | 180                      | 180 |
|                        | 1.50        |                            | \$3917                            | \$3842 | \$3080                           | \$3080 | \$131 NET                               | 240                      | 240 |

Export voltages available

CT=CONTACT FACTORY

## MODEL NOMENCLATURE

ME = MiniCon Indoor Model  
MC = MiniCon Outdoor Model

H = HERMETIC compressor

050 = 1/2 H.P.  
075 = 3/4 H.P.  
100 = 1 H.P.  
165 = 1-1/2 H.P.

L = LOW TEMP  
M = MEDIUM TEMP

44 = R-404A

VINTAGE CODE

- Low profile, compact design on a sturdy base.
- High-low pressure control and oil pressure control (when required).
- Compressor contactor (three phase) or start kit (single phase).
- Dual section electrical control panel for power or control components.
- Main power block and circuit fuses.
- Liquid receiver with shut-off valve and pressure relief plug.
- UL and cUL listed.

## additional features on MC models

- Liquid line filter/drier, sight glass and pre-bent piping.
- Suction line filter and pre-bent piping.
- Crankcase heater.
- Heavy gauge weather-proof housing on a raised base.

MINICON CONDENSING UNIT







Turn to the Experts.™



ACCESSORIES

## ACCESSORIES

- PRESTIGE
- REACH-IN, ROLL-INS, ROLL-THRU
- FOOD PREPARATION
- UNDERCOUNTER WORKTOP
- BAR EQUIPMENT
- MILK COOLERS
- GLASS DOOR MERCHANDISERS
- OPEN-AIR MERCHANDISERS
- DELI CASES, STEP-INS AND CONDENSING SYSTEMS
- BEVERAGE-AIR ACCESSORIES



## ACCESSORIES

## PARTS

## ● flat shelving

EXTRA FLAT SHELVING, GARNISH RACKS AND OVERSHELVES NOT AVAILABLE PACKED IN COOLER.

E&amp;P SERIES REACH-IN

List Price

Large shelf, standard \$80.00

Small shelf, standard \$34.00

Large shelf, stainless \$249.00

Small shelf, stainless \$152.00

Shelf Clips \$0.51

K-SERIES REACH-INS (ORDER BY MODEL NUMBER AND SHELF LOCATION)

KF/KR models \$80.00

MT MARKETEERS® (ORDER BY MODEL NUMBER)

Models MT10,12,27,38,45,49,66,72 \$80.00

C-SERIES MERCHANDISERS (ORDER BY MODEL NUMBER AND SHELF LOCATION)

CRG/CFG24, 48, 74 \$80.00

CFG12 \$80.00

COUNTER TOP MERCHANDISERS (ORDER BY MODEL NUMBER)

CR/CF \$80.00

UR30 \$80.00

\*Other Models - Consult Factory

## ● shelves for beer equipment

Model List Price

DD78E \$237.00

DD78 \$237.00

DD94 \$132.00

DD68 \$152.00

DD58 \$158.00

DD50 \$125.00

DD48 \$158.00

DD72 \$158.00

## ● shelves for milk storage units

Model List Price

MS68 \$158.00

MS58 \$158.00

## ● overshelving

Model 10" Single Overshelf List Price 10" Double Overshelf List Price

SP27 \$338.00 \$581.00

SP48 \$494.00 \$986.00

SP60 \$829.00 \$1480.00

SP72 \$986.00 \$1956.00

Other models - Consult factory

Not available on Mega Top Series

## ● free standing bun tray racks

DP/SP Models (per door opening) List Price

\$341.00

Note: DP racks hold 11 full size trays. SP racks hold 10 half-size trays.

## ● garnish racks-fit inside bun pans-by others

DP46 use one each full and one each 1/2 size

DP67 use two each full and one each 1/2 size

DP93 use three each full and one each 1/2 size


DP119 use four each full and one each 1/2 size

Full Pan List Price

Half Pan \$158.00

\$104.00

● UR30 Stand List Price \$245.00



### locks - factory installed

|                          |            |
|--------------------------|------------|
| ● MT MARKETEERS®         | List Price |
| MT10, 12, 19, 23, 27     | add \$313  |
| MT15, 17, 35, 38, 45, 49 | add \$332  |
| MT66, 72                 | add \$350  |

|  |           |
|--|-----------|
| ● E&PRESTIGE PLUS SERIES w/GLASS DOORS |           |
| Any model per door                     | add \$264 |

|                    |           |
|--------------------|-----------|
| ● SP SERIES        |           |
| Any model per door | add \$311 |

|                    |           |
|--------------------|-----------|
| ● UCR, WTR MODELS  |           |
| Any model per door | add \$311 |

|                              |           |
|------------------------------|-----------|
| ● CF5/CR5, CF12, UR30 MODELS |           |
| Any model per door           | add \$281 |


|                   |           |
|-------------------|-----------|
| ● GF GLASS FOSTER |           |
| GF24L, GF34L      | add \$275 |
| GF48L             | add \$308 |

|                              |           |
|------------------------------|-----------|
| ● DW DEEP WELL COOLERS       |           |
| DW49, 64 solid or glass lids | add \$269 |

|                          |           |
|--------------------------|-----------|
|                          |           |
| DW79 solid or glass lids | add \$288 |

|                          |           |
|--------------------------|-----------|
|                          |           |
| DW94 solid or glass lids | add \$313 |

|                                  |  |
|----------------------------------|--|
| ● OTHER MODELS - CONTACT FACTORY |  |
|----------------------------------|--|



### finish options in stainless steel Stainless Steel Modifications

| Model            | Complete Exterior | Complete Interior | List Price Front Only |
|------------------|-------------------|-------------------|-----------------------|
| BB48, 48G, 58    |                   |                   |                       |
| DD50, 58/GF48    | \$1353            | \$1550            | \$774 (BB/DD only)    |
| BB/DD68          | \$1486            | \$1641            | \$870                 |
| BB72,72G,78/DD78 | \$1662            | \$1854            | \$947                 |
| BB/DD94          | \$1836            | \$2032            | \$1158                |
| BM23,GF24        | \$774             | \$870             | Contact Factory       |
| GF34/SF34        | \$829             | \$893             | Contact Factory       |
| DW49             | \$870             | \$963             | Contact Factory       |
| DW64             | \$961             | \$1063            | Contact Factory       |
| DW79             | \$1258            | \$1392            | Contact Factory       |
| DW94             | \$1353            | \$1469            | Contact Factory       |

### Other models -

### curved glass marketeer

### CDR/CDD MODEL ACCESSORIES

### Casters 3", 2 w/brakes

### Additional lighted Shelf

### CDR3

### CDR4

### CDR5

### CDR6

### reversed doors

Add \$461 to list price of cabinet when factory reverses the door.

Field Reversible doors are standard on E, BB, DD, MT27 & UR30.

### pan slides

E&Prestige Plus Series Reach-Ins - consult cut sheets

|  | List Price        |
|--|-------------------|
| No. 1 Stainless steel angle, max. 13pr/1/2sec.@3" oc | \$82/pair         |
| No. 2 Stainless steel angle, max. 13pr/1/2sec.@2" oc | \$82/pair         |
| No. 3 Stainless steel angle, max. 8pr/1/2sec.@3" oc  | \$128/pair        |
| No. 4 Wire rod slide, max. 38pr/sec.@1 1/2 " oc      | \$494 per 1/2 sec |

NOTE: Shelf pilasters require changing to accommodate pan slides - consult cut sheets.

For heavy-duty pilaster add

For wide pilaster add

PR/PF, ER/EF24's glass door

Other models - Contact factory

Add \$439 to list price of cooler plus cost of pan slides when ordered with the cabinet.

\$59 1/2 sec

\$77 1/2 sec

### No. 1 Stainless Steel Angle Slide

- Part No. 61C08-007A
- Each pair rim supports 2 ea. 12" x 20" hotel pans - 3" minimum spacing
- Requires use of heavy duty pilaster kit No. 61C08-010A (2 required per section) optional on ER/EF models

### No. 2 Stainless Steel Angle Slide


- Part No. 61C08-008A
- Each pair bottom supports (1 each) 18" x 26" bun pan or (2 each) 14" x 18" bun pans - 2" minimum spacing
- Requires use of wide pilaster, kit No. 61C08-011A (2 required per section) Wide pilasters optional on all models

### No. 3 Stainless Steel Angle Slide

- Part No. 61C08-009A
- Each pair bottom supports (2 each) 12" x 20" hotel pans or (1 each) 18" x 26" bun pan or (2 each) 14" x 18" bun pans
- Requires use of standard heavy duty pilaster, kit No. 61C08-010A (2 required per section), optional on ER/EF models

### No. 4 Epoxy Coated Wire Rod Slide

- Part No. 61C31-053A
- Rim supports a maximum of 19 ea. 18" x 26" bun pans per half section with 1 1/2" fixed spacing
- Pilasters not required - Adjustable to pan width.

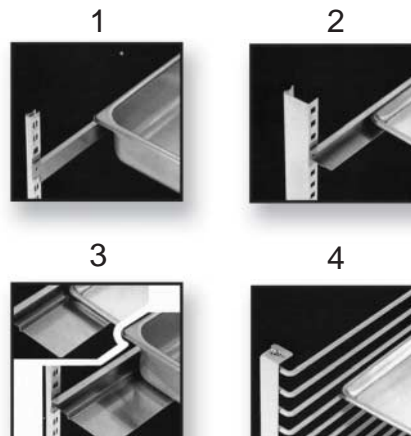

## ACCESSORIES

## PARTS

## syrup rails &amp; accessories for MS58 &amp; MS68



|  |            |
|--|------------|
| Syrup Rail Housing for 9 Jars                  | List Price |
| Syrup Rail Housing for 6 Jars                  | \$327.00   |
| Syrup Rail Housing for 3 Jars                  | \$294.00   |
| Syrup Pump for above                           | \$165.00   |
| Chocolate Pump for above                       | \$249.00   |
| Jar - 3 1/2 Quart Syrup or Chocolate for above | \$327.00   |
| Jar - 2 1/2 Quart Crushed Fruit for above      | \$84.00    |
| Cover - Fruit Jar for above                    | \$84.00    |
| Inserts - Fruit Jar - 6 Inserts Standard       | \$125.00   |
| Jar - 40 oz. Crushed Fruit                     | \$490.00   |
| Ladel Cover Assembly                           | \$84.00    |
|  | \$108.00   |

## casters

|  |            |
|--|------------|
| ● MT Marketeers®                             | List Price |
| MT10, 12, 15, 17, 19                         | add \$249  |
| (Set of 4, stem mount, 2 w/brakes)           |            |
| Any other MT model                           | add \$249  |
| ● DMC Deli Cases, CDR Curved Glass Marketeer |            |
| DMC4, 6 (set of 4)                           | add \$249  |
| DMC8, (set of 6)                             | add \$281  |
| CDR/CDD3, 4, 5, 6 (set of 4)                 | add \$249  |
| ● Prestige Plus-Series Reach-Ins/Pass Thru's |            |
| Any model (set of 4)                         | add \$249  |
| ● DW/GF Deep Well and Glass Frosters         |            |
| DW49, 64, and all GF (set of 4)              | add \$249  |
| DW79, 94 (set of 6)                          | add \$281  |
| ● DD/BB Direct Draw & Back Bar               |            |
| BB78, 94, DD78, 94 (set of 6)                | add \$281  |
| BB48, 58, 68, 72 (set of 4)                  | add \$249  |
| ● UR30 Mini-Merchandiser                     |            |
| All models                                   | add \$132  |
| (Set of 4, stem mount, 2 w/brakes)           |            |
| Stand optional                               | add \$246  |
| ● CFG/CRG Merchandisers                      |            |
| All models except CFG12                      | add \$249  |
| CFG12  | add \$249  |
| (Set of 4, stem mount, 2 w/brakes)           |            |

## legs

|   |           |
|---|-----------|
| ● K&E Series Reach-Ins                  |           |
| All models (set of 4)                   | add \$141 |
| ● MT Marketeers®                        |           |
| All models (set of 4)                   | add \$141 |
| ● SP/DP Prep Tables                     |           |
| All models (set of 4)                   | add \$141 |
| DP119 (set of 6)                        | add \$214 |
| ● UCR/WTR Models                        |           |
| All models (set of 4) except WTR/UCR119 | add \$141 |
| WTR/UCR119 (set of 6)                   | add \$281 |
| ● DW/BM/GF Models                       |           |
| All models except DW79, 94              | add \$141 |
| DW79, 94 (set of 6)                     | add \$214 |
| ● DD/BB Direct Draw & Back Bar          |           |
| DD/BB 78, 94 (set of 6)                 | add \$214 |
| DD/BB 48, 58, 68, 72 (set of 4)         | add \$141 |
| ● CF5/CR5/UR30 Countertop Models        |           |
| All models 4" (set of 4)                | add \$141 |



## PARTS

**voltage change to 220/50 or 60 cycle (list)**

(add to list pricing)

|                     |              |
|---------------------|--------------|
| 1 door refrigerator | \$222 - List |
| 1 door freezer      | \$324 - List |
| 2 door refrigerator | \$324 - List |
| 2 door freezer      | \$435 - List |
| 3 door refrigerator | \$435 - List |
| 3 door freezer      | \$545 - List |

**export crating (list)**

(add to list pricing)

**Horizontal Framed**

|              |              |
|--------------|--------------|
| 1 door units | \$263 - List |
| 2 door units | \$471 - List |
| 3 door units | \$635 - List |

**Horizontal Full**

|              |              |
|--------------|--------------|
| 1 door units | \$581 - List |
| 2 door units | \$711 - List |
| 3 door units | \$894 - List |

|              |              |
|--------------|--------------|
| 1 door units | \$361 - List |
| 2 door units | \$550 - List |
| 3 door units | \$711 - List |

|              |              |
|--------------|--------------|
| 1 door units | \$711 - List |
| 2 door units | \$1056- List |
| 3 door units | \$1400- List |

**beer equipment**

| DD/BM Model Accessories  | List Price |
|--|------------|
| Single beer faucet with 3" OD 8" column  | \$412      |
| Single beer faucet with 2 1/2" OD 8" column  | \$380      |
| Dual angle faucet with 3" OD 8" column   | \$737      |
| Single beer faucet for pedestal head   | \$244      |
| Water station assembly:<br>(includes faucet on stand,<br>chiller tube, lines & fittings) | \$653      |
| Reversible Door Hinge Kit  | \$78       |
| DW Model Accessories   | List Price |
| Extra wire dividers step   | \$47       |
| Extra wire dividers adjustable   | \$59       |
| Capcatcher (black)   | \$76       |
| SF Model Accessories   | List Price |
| Capcatcher (black)   | \$76       |

**school milk coolers**

|  | List Price |
|--|------------|
| ● Wrap around bumpers, all models                              | \$444      |
| ● Corner bumpers, all models                                   | \$34 each  |
| ● Not available factory installed due to shipping constraints. |            |

**miscellaneous**

|  | List Price  |
|--|-------------|
| ● Stainless Steel Breakers, Prestige Plus Models                                       |             |
| Half door  | \$570       |
| Full door  | \$633       |
| ● Door Thermometer for 29" Undercounter Models   |             |
| Stem type dial thermometer   | \$600       |
| ● Drawers for DP, UCR, WTR (32" Deep Models)   |             |
| (two per door)   |             |
| With 5" deep plastic insert  | \$1625      |
| ● Glass Doors for UCR/WTR Models   | \$1068 each |
| Gravity Shelf Organizer for MT models  |             |
| Contact factory  |             |
| ● Stacking Collar for 29" Deep UCR/UCF27 models  | \$326       |
| ● Specialized color add \$461 to list price plus cost of paint with five unit minimum. |             |

**remote models**

- Contact factory for available models and pricing.



## ACCESSORIES

## PARTS

## Crystal Open Merchandiser Accessories

| PART<br>NUMBER | ITEM     | DESCRIPTION                    | WEIGHT<br>(EACH) | LIST<br>PRICE |
|----------------|----------|--------------------------------|------------------|---------------|
| ● 45-0160-01P  | Dividers | Makes 12 Compartments - COI 17 | 10               | \$472         |
| ● 45-0160-02P  | Dividers | Makes 24 Compartments - COI 33 | 20               | \$941         |

## Modular Merchandiser Accessories

| PART<br>NUMBER | ITEM                   | DESCRIPTION                              | LIST<br>PRICE |
|----------------|------------------------|--|---------------|
| ● 52-2047-01   | 3' Rear Wrapping Board | Rear Wrapping Board Kit for 3' Models    | \$296         |
| ● 52-2047-02   | 4' Rear Wrapping Board | Rear Wrapping Board Kit for 4' Models    | \$755         |
| ● 52-2048-02   | Shelves, Glass         | Glass Display Shelf for 3' Models (Pair) | \$802         |
| ● 52-2049-01   | Shelves, Glass         | Glass Display Shelf for 4' Models (Pair) | \$449         |
| ● 52-2049-01   | Shelves, Light Kit     | Light Kit for 3' Models (Both Shelves)   | \$497         |
| ● 52-2049-02   | Shelves, Light Kit     | Light Kit for 4' Models (Both Shelves)   | \$590         |
| ● 52-2050-01   | Shelves, Wire          | Wire Shelf for 3' Models (Pair)          | \$590         |
| ● 52-2050-02   | Shelves, Wire          | Wire Shelf for 4' Models (Pair)          | \$425         |
| ● 52-2066-00   | Caster Kit             | OHM Models Only                          | \$612         |
| ● 03-2029-01P  | Filler Panel           | For Base Ends - Front                    | \$73          |
| ● 03-2029-02P  | Filler Panel           | For Base Ends - Rear                     | \$73          |



## MARKETEER® SIGNS/DECALS

Full four color graphics available  
Variety of signs are manufactured to fit the following models:  
Door Decals: MT12, Sign Panel: MT27 Sign Panel: MT45, 49, 66, 72



## COW SPOTS/MILK GRAPHICS



Cow Spot Kits are manufactured to fit the following models in White exterior only: MS Series, MT Series, SM Series, SMF Series, ST Series, STF Series, UR30GFD

## C-SERIES SIGNS/DECALS

Variety of signs are manufactured to fit the following models:



CONTACT FACTORY FOR PRICING AND

Add \$414 to list price for above



BEVERAGE-AIR



Turn to the Experts.™







INFORMATION

LINE DRAWINGS, WARRANTY INFORMATION

# PRODUCT LINE DRAWING

## COMMON END VIEWS

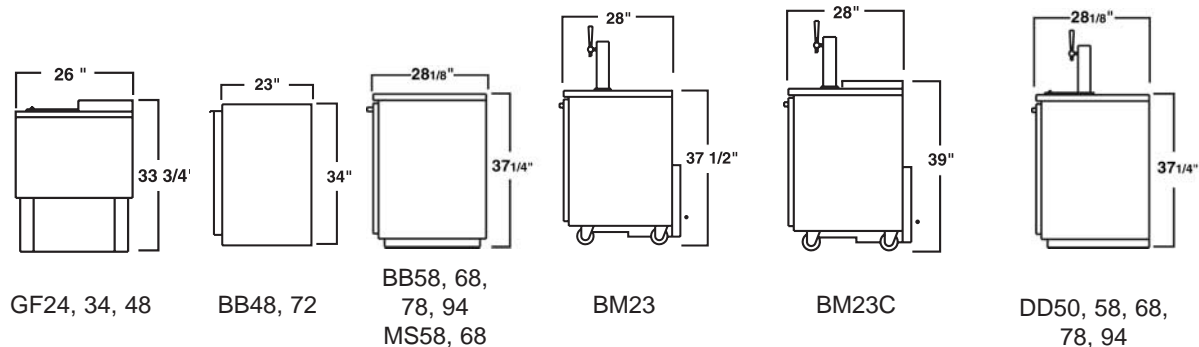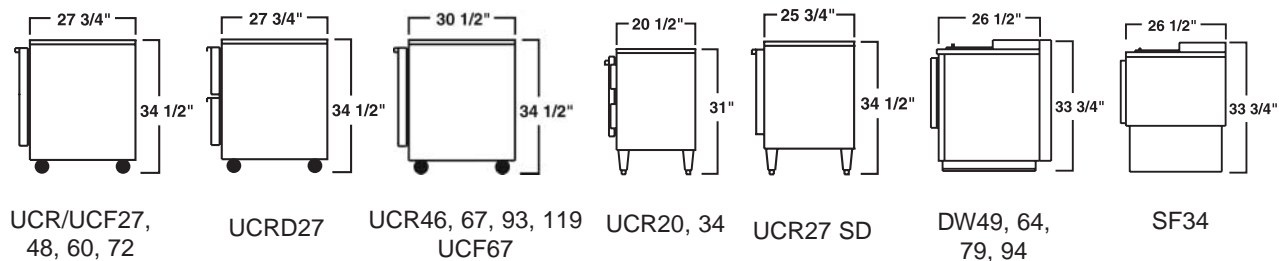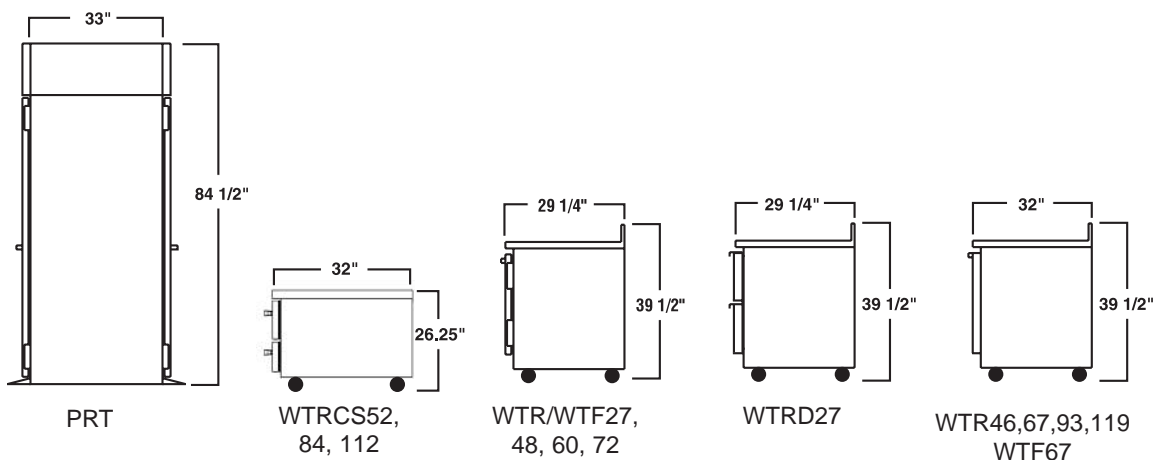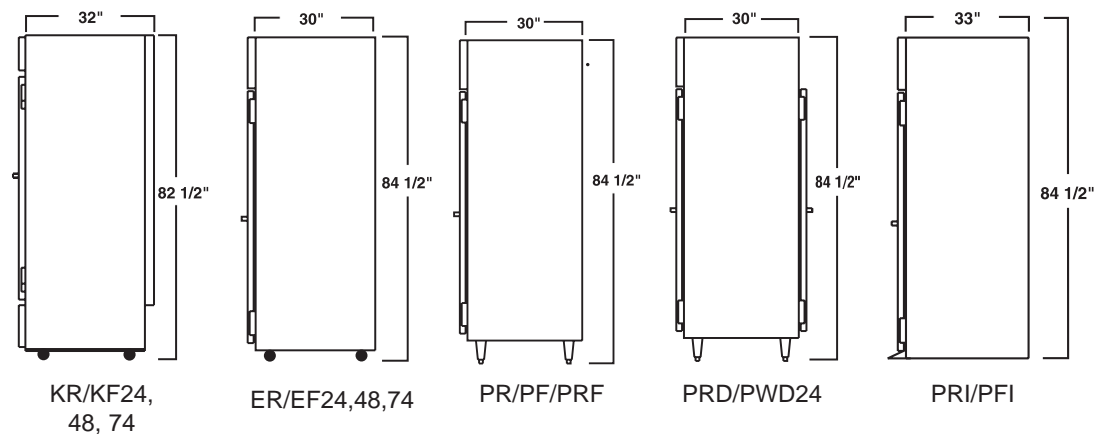

LINE DRAWINGS, WARRANTY INFORMATION




# PRODUCT LINE DRAWING


## COMMON END VIEWS




LINE DRAWINGS, WARRANTY INFORMATION




DD50C, 58C, 68C




PC51/PCP51




CR/CF5  
Single Door




CR/CF5  
Pass Thru




UR30GEFD




MT27, 49, 72




MT45, 66




MT12




ST34, 49, 58  
SM34, 49, 58  
(Width is 31")




SMF34, 49, 58




PRODUCT  
DISPLAY  
CASES




BZ13




MM14




BZ16




MT38, 45, 66




CFG12



CFG/CRG24,  
48, 74



CDR3, 4, 5, 6  
CDD4



DMC/SDC4,  
6, 8

LINE DRAWINGS



DETAILED LINE DRAWINGS AVAILABLE IN  
KCL CADALOG LIBRARY



BEVERAGE-AIR

## SALES TERMS

### WARRANTY VALID ONLY IN USA AND CANADA

#### Prices & Specifications

Beverage-Air reserves the right to change the price and specifications of the equipment and/or material without notice. Prices are f.o.b. plant of manufacture.

#### Cancellation

Buyer may cancel its order, reduce quantities, revise specifications, or extend schedules only by mutual agreement as to reasonable and proper cancellation charges which shall take into account expenses already incurred and commitment made by seller, and buyer shall indemnify seller against any loss.

#### Freight Class

All Beverage-Air products ship under 92.5 freight classification.

#### Customer's Freight Damage Procedure

Before signing the carrier's freight bill the customer should do the following:

##### Visible Damage:

1. Inspect shipment for any damage. If you see damage or feel there may be concealed damage, mark the carrier's copy of the freight bill "damaged".
2. If there is damage to your shipment, action must be taken by you to notify the carrier within 48 hours of receipt. A freight claim must be filed with the carrier and an inspection scheduled by the carrier. It is the duty of the carrier to give you a written report upon notification. (VISIBLE AND CONCEALED).
3. For visible damage do not accept delivery unless the condition is noted on your copy of the freight bill and signed by the driver.

##### Concealed Damage:

4. If the damage is concealed, notify the carrier within 48 hours by phone and in writing. Ask them to send their agent to complete an inspection report. Retain all cartons and merchandise for inspection. It is critical that the customer take the above actions.

#### Return Of Product

EQUIPMENT - Prior Authorization must be granted by Beverage-Air before equipment can be returned for credit. Returns will only be authorized within 90 days of invoice date. Return authorizations are valid for 60 days. Equipment approved for return is subject to a 25% restocking charge. Returned equipment must be shipped freight pre-paid, packed in original carton, and received in good condition.

PARTS - Prior Authorization must be granted by Beverage-Air before parts can be returned for credit. Returns will only be authorized within 30 days of invoice date. Return authorizations are valid for 60 days. Parts approved for return are subject to a \$50 or 25% restocking charge (whichever is greater). Returned parts must be shipped freight prepaid, in the original packaging, and received in good condition.

#### Limited Warranty: One (1) Year Warranty (Parts and Labor)

Beverage-Air, a division of Carrier Commercial Refrigeration, Inc. warrants to the original purchaser of Beverage-Air branded equipment, including all parts thereof, that such equipment is free from defects in material and workmanship, under normal use and service as indicated by Beverage-Air installation and operation instructions, for a period of one (1) year from the date of installation, or fifteen (15) months from the date of shipment from the manufacturer, whichever is earlier. For the purpose of this warranty, the original purchaser shall be deemed to mean the individual or company for whom the product was originally installed. Our obligation under this warranty shall be limited to repairing or replacing, including labor, any part of such product which proves thus defective. Beverage-Air reserves the right to examine any product claimed to be defective. If after review the product is not deemed defective.

Beverage-Air reserves the right to deny payment for repair and labor. The labor warranty shall be for self-contained units only and for standard straight time, which is defined as normal service rate time, for service performed during normal working hours. Any service requested outside of a service's normal working hours will be covered under this warranty at the normal rate and any additional overtime rate will be the responsibility of the equipment purchaser.

Any part determined to be defective and requested to be returned should be returned to the company within thirty (30) days under the terms of this warranty and must be accompanied by a record of the cabinet model, serial number, and identified with a return authorization number issued by the manufacturer.

Improper operation resulting from factors, including but not limited to, low voltage conditions, inadequate wiring, and accidental damage are not manufacturing defects and are strictly the responsibility of the purchaser.

Condenser coils must be cleaned at regular intervals. Failure to do so can cause compressor malfunction and will void warranty. Although cleaning requirement may vary in accordance with the operation of various products, we recommend a minimum monthly cleaning.

This warranty is not effective unless the Beverage-Air Warranty Registration Card, furnished with each unit, is properly completed and mailed to Beverage-Air within 10 days from date of installation.

#### Additional Four (4) Year Compressor Part Warranty

In addition to the warranty set forth above, Beverage-Air warrants the hermetically / semi-hermetically sealed compressor (part only) for an additional four (4) years, based upon installation date; not to exceed sixty-three (63) months from the date of shipment from Beverage-Air. For hermetically sealed compressors only, the compressor data tags may be returned to the factory for this warranty instead of the compressor part. Semihermetic compressors may be exchanged through local compressor distributors and copies of local invoices and core credits submitted for reimbursement. This extended warranty does not apply to any electrical controls, condenser, evaporator, fan motors, overload switch, starting relay, temperature control, dryer, accumulator, wiring harness, labor charges, or supplies which are covered by the standard warranty above.

NO CLAIMS CAN BE MADE AGAINST THIS WARRANTY FOR SPOILAGE OF PRODUCTS, LOSS OF SALES OR CONSEQUENTIAL DAMAGES.

THE FOREGOING WARRANTIES ARE EXPRESSLY GIVEN IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED, AND ALL OTHER OBLIGATIONS OR LIABILITIES ON OUR PART, AND WE NEITHER ASSUME, NOR AUTHORIZE ANY OTHER PERSON TO ASSUME FOR US, ANY OBLIGATION OR LIABILITY IN CONNECTION WITH THE SALE OF SAID REFRIGERATION UNITS OR ANY PARTS THEREOF.

This warranty shall not be assignable and shall be honored only in so far as the original purchaser.

This warranty does not apply outside the limits of the United States of America and its territories and Canada, nor does it apply to any part which has been subject to misuse, neglect, alteration, accident, or to any damage caused by transportation, flood, fire, or acts of terrorism, or acts of God.

#### Limitation Of Liability

Beverage-Air, Carrier Commercial Refrigeration, Inc., or their affiliates shall not be liable for any indirect, incidental, special or consequential damages, or losses of a commercial nature arising out of a malfunctioning equipment or its parts or components thereof, as a result of defects in material or workmanship.

THE ORIGINAL OWNER'S SOLE AND EXCLUSIVE REMEDY AND BEVERAGE-AIR'S SOLE AND EXCLUSIVE LIABILITY SHALL BE LIMITED TO THE REPAIR OR REPLACEMENT OF PARTS OR COMPONENTS CONTAINED IN THE EQUIPMENT IDENTIFIED ABOVE WHICH UNDER NORMAL USE AND SERVICE MALFUNCTION AS A RESULT OF DEFECTS IN MATERIAL OR WORKMANSHIP, SUBJECT TO THE APPLICABLE PROVISIONS AND LIMITATIONS STATED ABOVE. MANUFACTURER'S WARRANTY

Note: Additional Terms and Conditions of sale may apply.

Notice: Minimum Parts Order - \$25.00 Specifications Subject To Change Without Notice Notice:  
Contact factory for specific model agency approval.

All prices are ex-works Spartanburg, South Carolina Brookville, Pennsylvania





700 BUFFINGTON ROAD SPARTANBURG, SOUTH CAROLINA 29303  
1.888.845.9800 | [WWW.BEVERAGE-AIR.COM](http://WWW.BEVERAGE-AIR.COM)

BEVERAGE-AIR, A DIVISION OF CARRIER COMMERCIAL REFRIGERATION, INC.